


YWW 45 FS

High Performance, Front Set Window Wall System



WINDOW WALL SYSTEM

Product Description

The YWW 45 FS system is designed specifically to meet the performance requirements of window walls for multi-story buildings. Glass is set to the front of the system, and may be glazed from either the interior of the building for labor savings or from the exterior at column line applications. The system may be installed with head and sill members running continuously or with the head and sill members cut in between the vertical members. Sill flashing is only required when the head and sill members are cut in between the verticals; in addition, sill members are anchored without penetrating the sill flashing.


Product Options & Features

- Perimeter Members: 1-3/4" x 4-1/2"
- Continuous Head & Sill Available
- Screw Spline or Shear Block Construction
- Optional SSG Intermediate Vertical
- Strap & Roll-Over Anchors are available for Precast Conditions



YKK
ap

Quality
inspires®

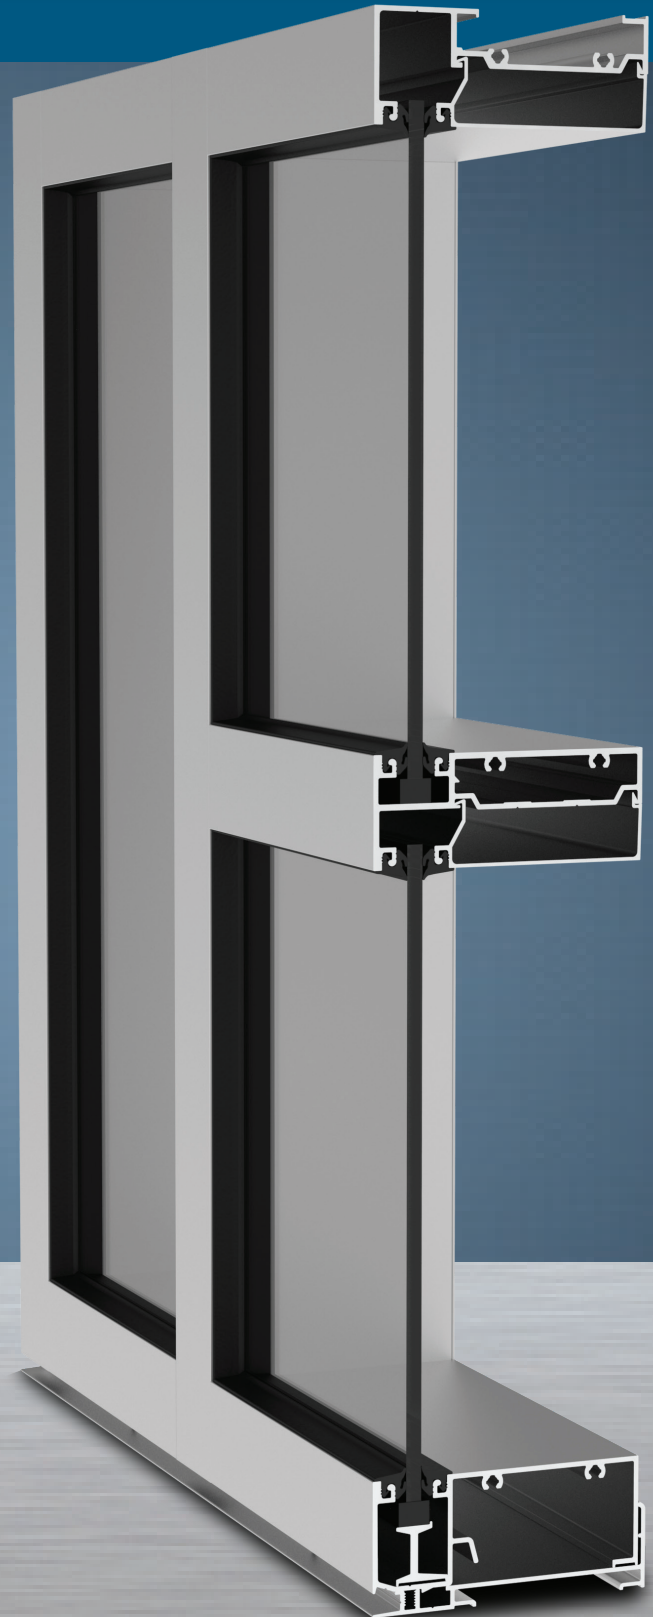


YWW 45 FS

SYSTEM SPECIFICATIONS

System Sightline	Base Depth	Glazing & Config	Glass	Air Infiltration	Water Infiltration
1-3/4"	4-1/2"	Inside & Front Set	1/4" IGU with Low-E (C.O.G. U-factor: 0.29)	0.06 CFM/FT ² (1.10 m ³ /h·m ²) @ 6.24 PSF (299 Pa)	Static: 12 PSF (575 Pa) Dynamic: 12 PSF (575 Pa)
Testing Standards				ASTM E 283	ASTM E 331 & AAMA 501
Installation Options				Continuous Head & Sill, Vertical Through or Screw Spline with Monolithic Glass	
Available Finishes				Factory Anodized (AAMA 612) and Organic Paints (AAMA 2604 & AAMA 2605)	

CUSTOM DETAILS

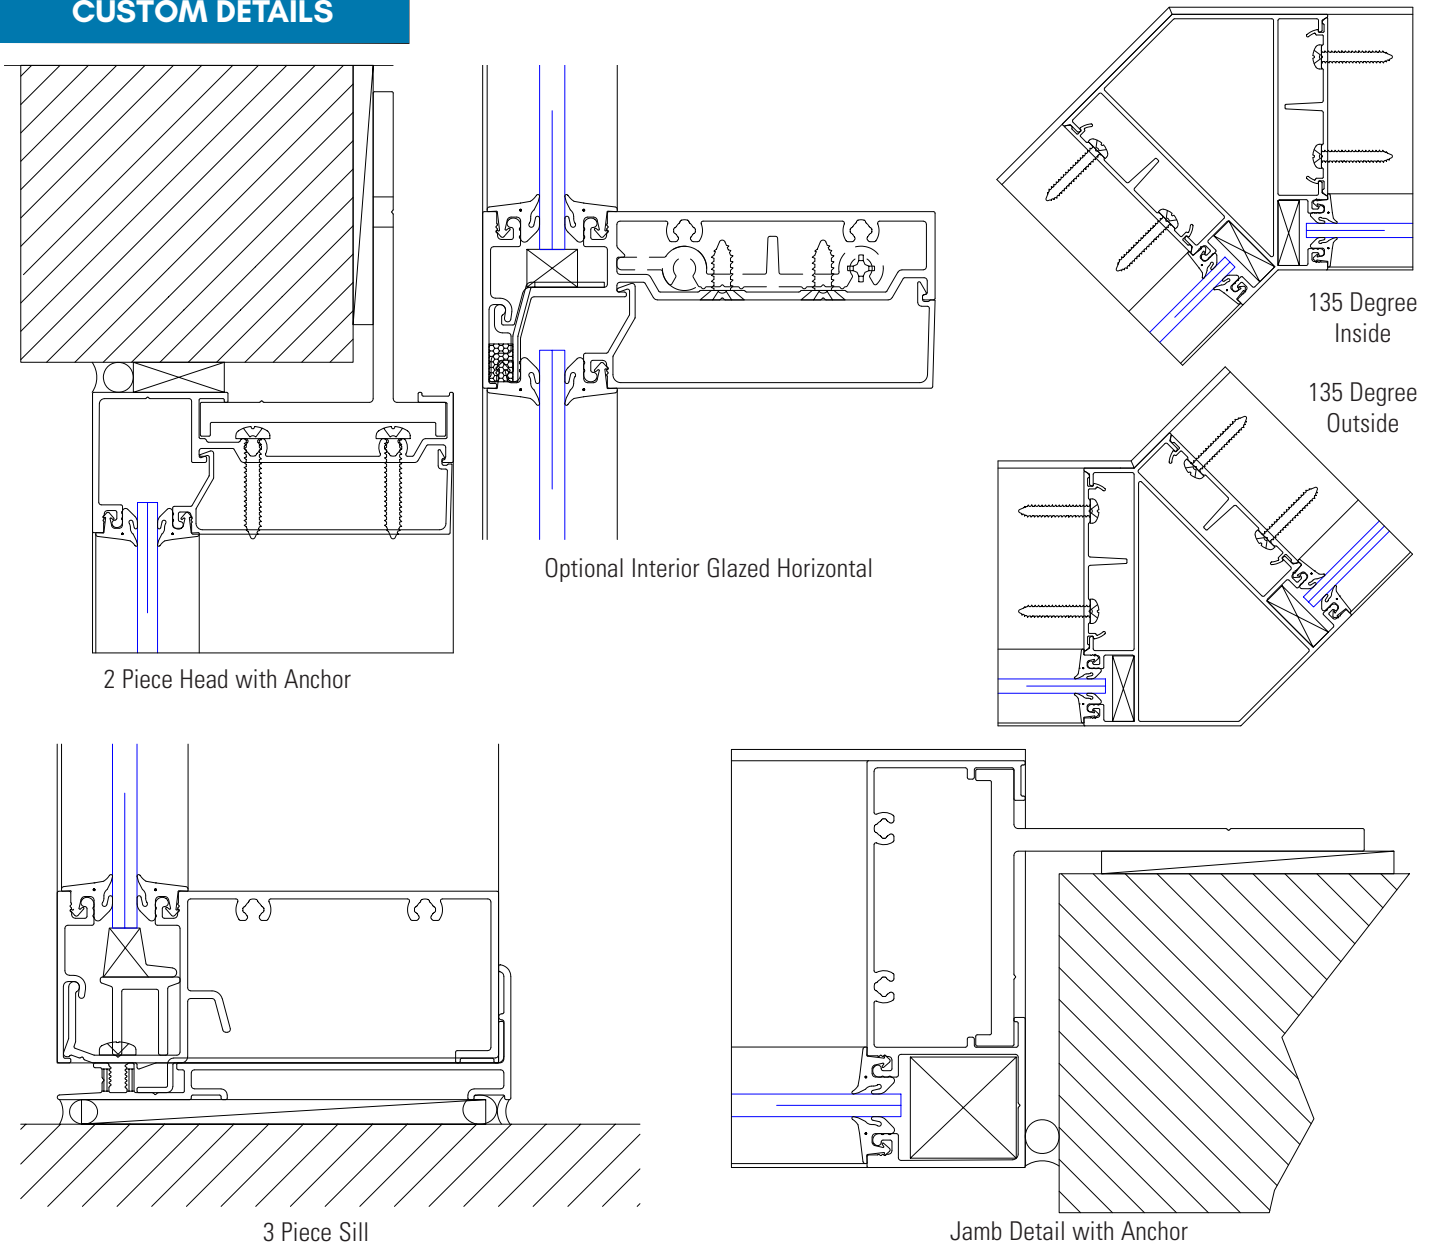

Additional information including CAD details, CSI specifications, Test Reports and Installation instructions are available online at:

www.ykkap.com/commercial/product/window-walls/yww-45-fs/