




TABLE OF CONTENTS

YES 60 FI
STOREFRONT SYSTEM FOR 1" GLAZING
2" x 6"


PICTORIAL VIEWS Page 2

FRAMING MEMBERS (1/4 SIZE) Pages 3 to 5












WIND LOAD / DEAD LOAD CHARTS Pages 6 to 7

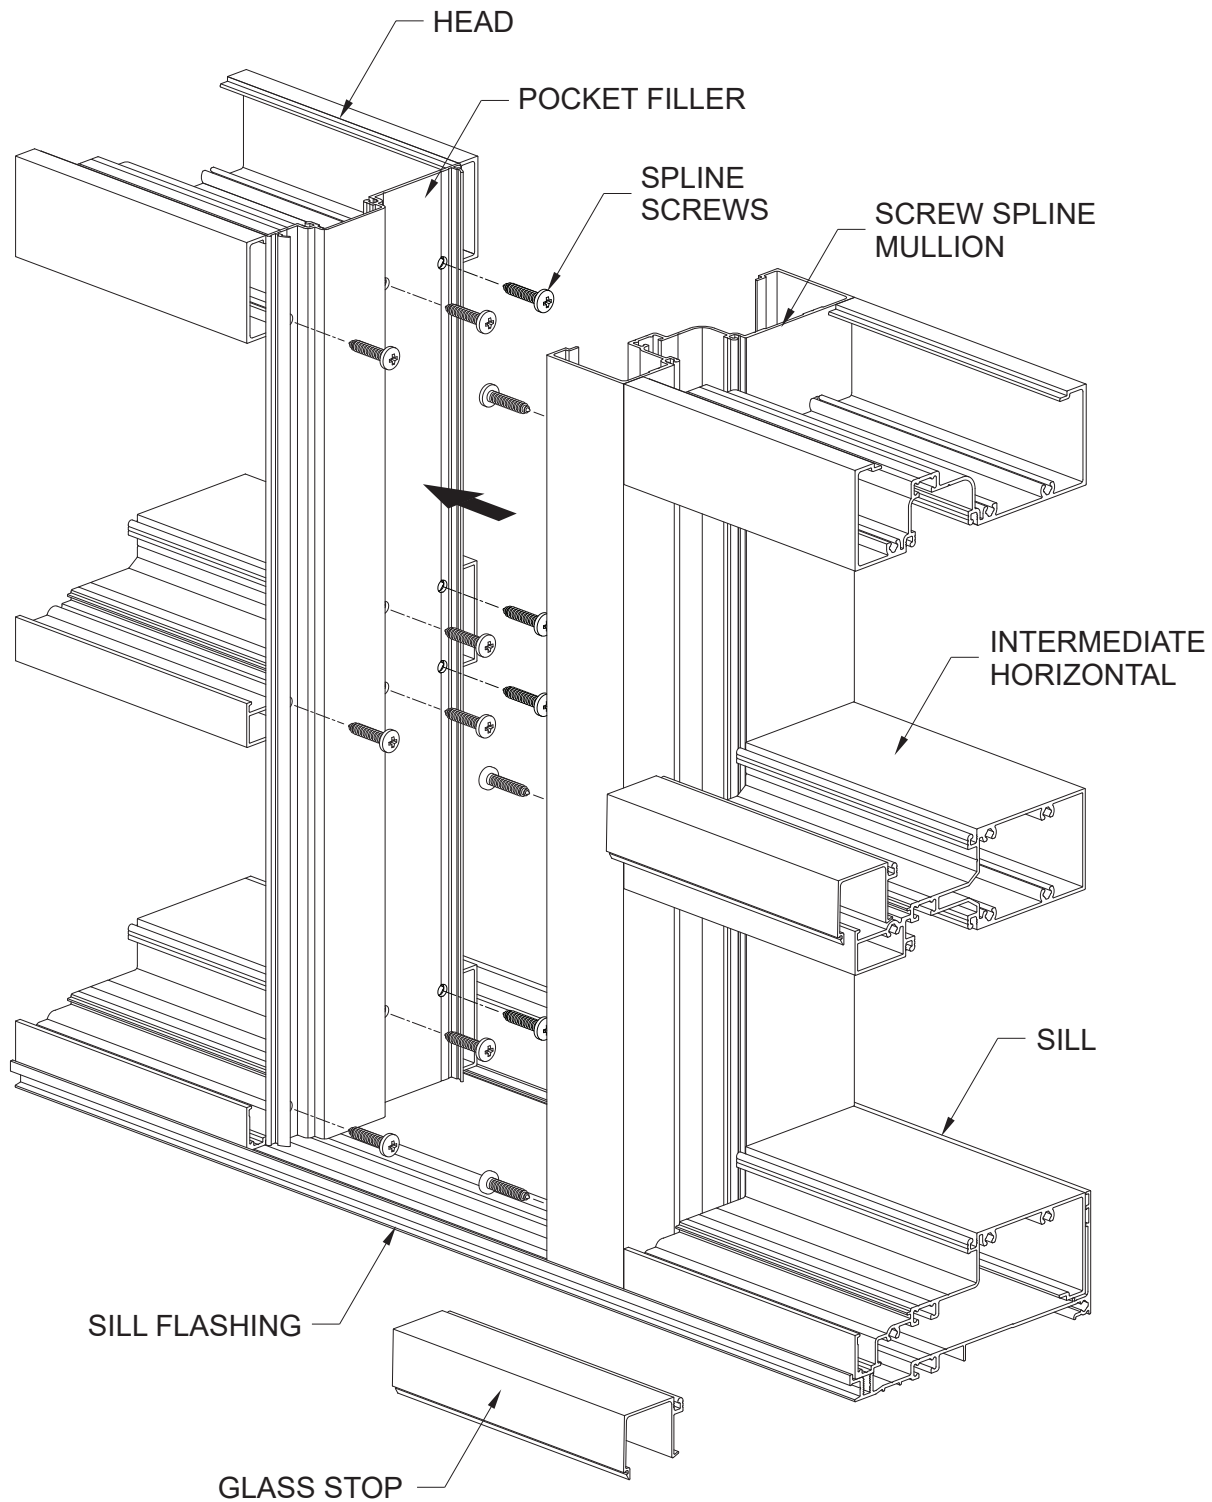


SCALE: 1/4 SIZE





YES 60 FI HORIZONTAL MEMBERS

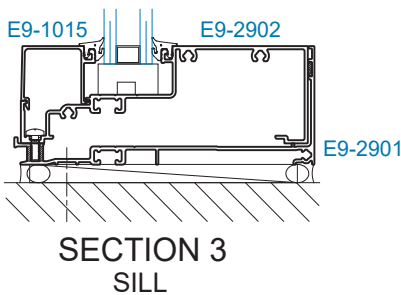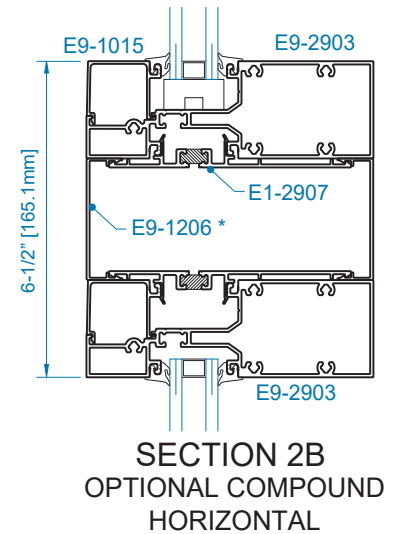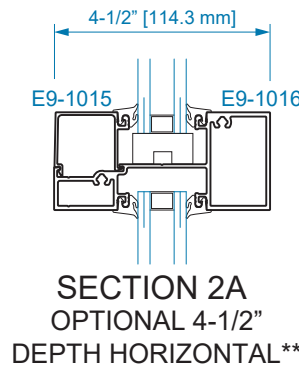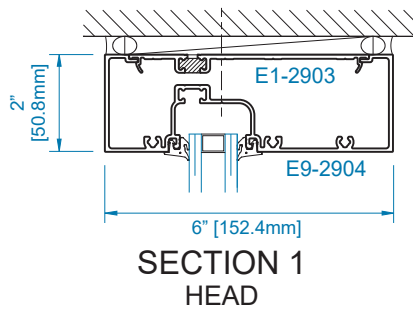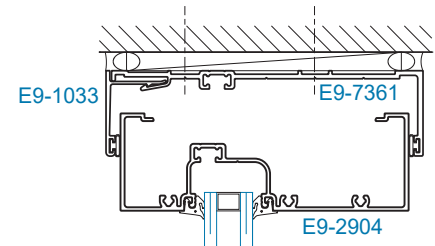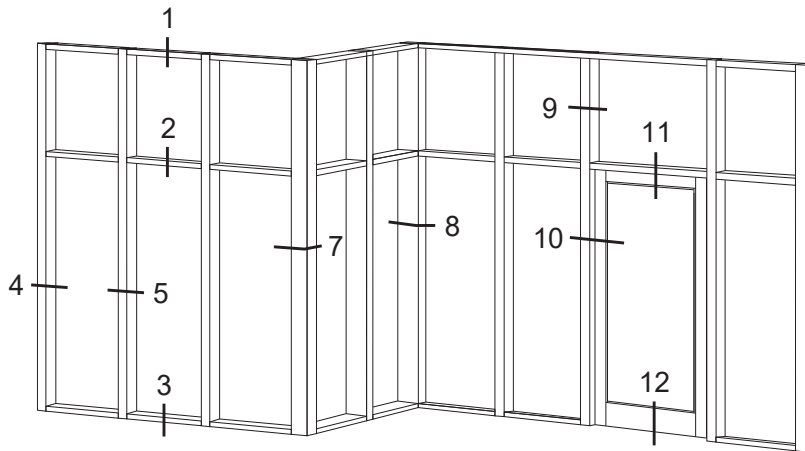


* Other face cover options available. Contact YKK AP for more information.
 ** Use E2-0628 setting block with 4-1/2" depth horizontal.




YES 60 FI VERTICAL AND CORNER MEMBERS

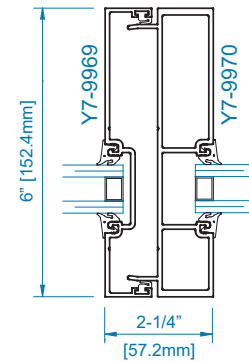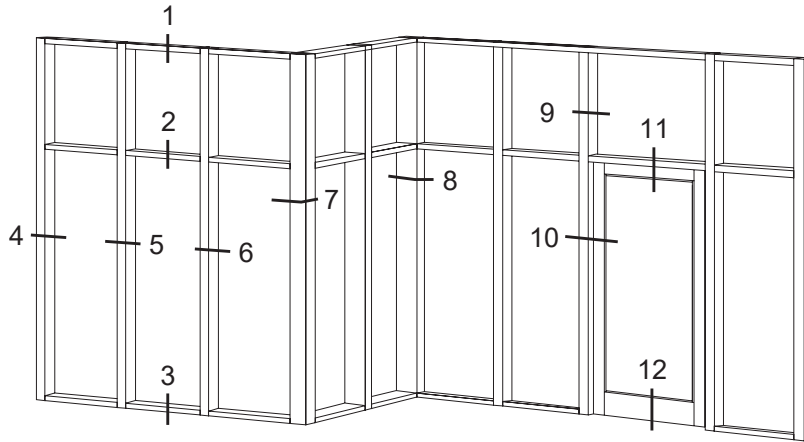


**SECTION 6
EXPANSION
MULLION**

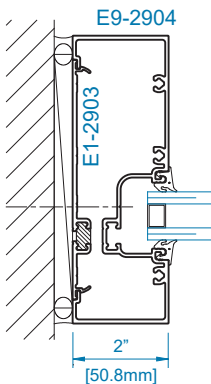


**SECTION 4
JAMB**

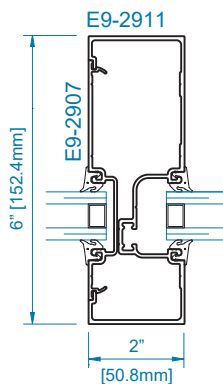


**SECTION 5
MULLION**

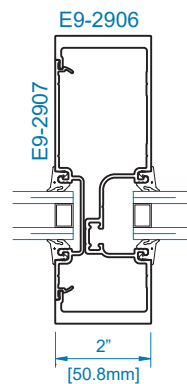


**SECTION 5A
HEAVY DUTY
MULLION**

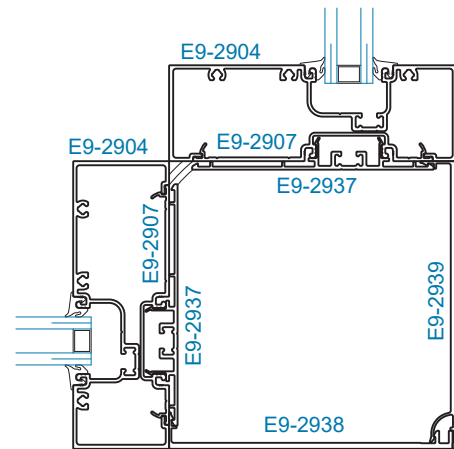


**SECTION 7
90° OUTSIDE
CORNER**

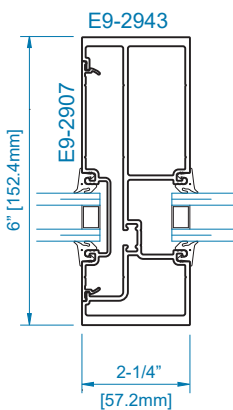

**SECTION 5B
HEAVY DUTY
MULLION**

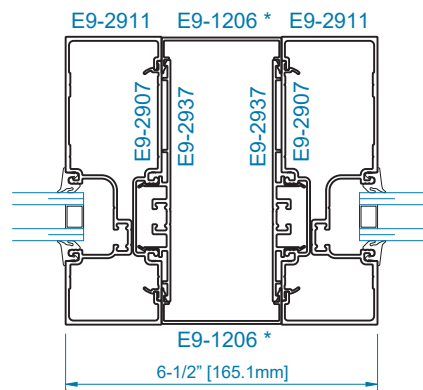

**SECTION 5C
OPTIONAL COMPOUND
MULLION**


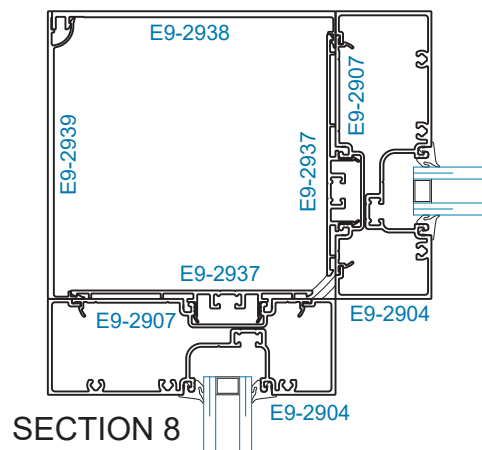


**SECTION 8
90° OUTSIDE
CORNER**


SCALE: 1/4 SIZE

Other face cover options available. Contact YKK AP for more information.


YES 60 FI DOOR FRAMING MEMBERS

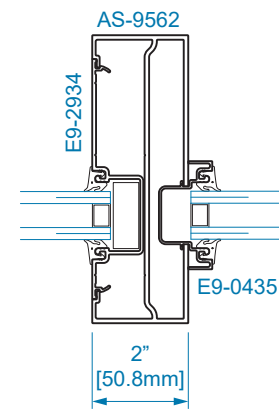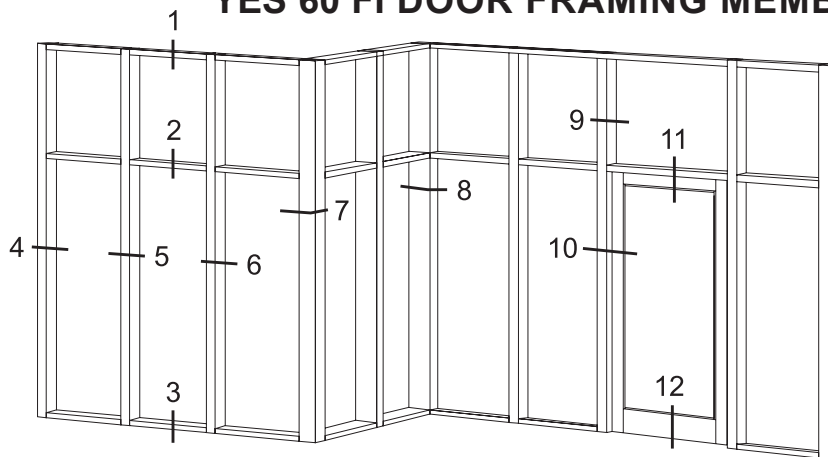


**SECTION 9
DOOR JAMB
@ TRANSOM**

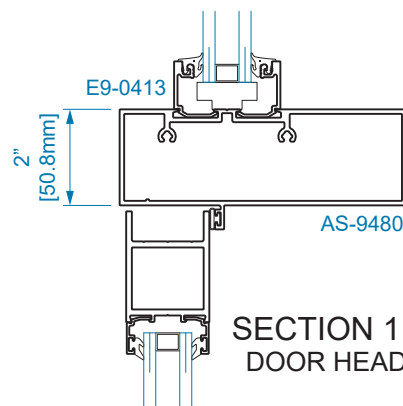


**SECTION 11
DOOR HEAD**

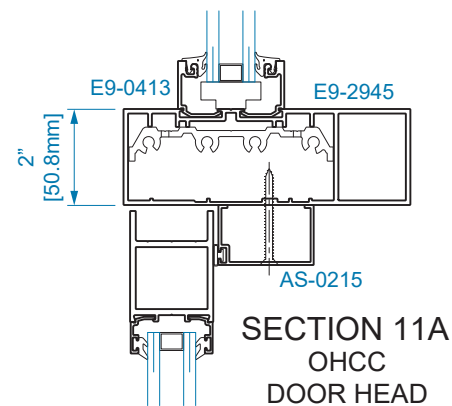


**SECTION 11A
OHCC
DOOR HEAD**

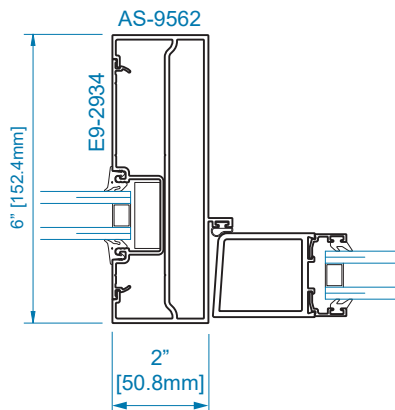

**SECTION 10
DOOR JAMB**

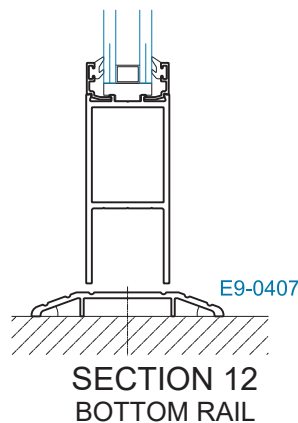

**SECTION 12
BOTTOM RAIL**



YES 60 FI WIND LOAD CHARTS

DEFLECTION CRITERIA: AAMA TIR-A11 - L/175 FOR $\leq 13'-6"$ SPAN OR



$L/240 + 1/4"$ (6.4mm) - FOR SPANS GREATER THAN $13'-6"$ (4.1m) BUT LESS THAN $40'-0"$ (12.2m)

CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN $3/4"$ (19.1mm) ALONG SUPPORTED EDGE.



ALLOWABLE WIND LOAD STRESS

YKK AP tested standard. Contact YKK AP for more information.


These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span. For other applications, please contact YKK AP engineers at 1-866-955-2732.

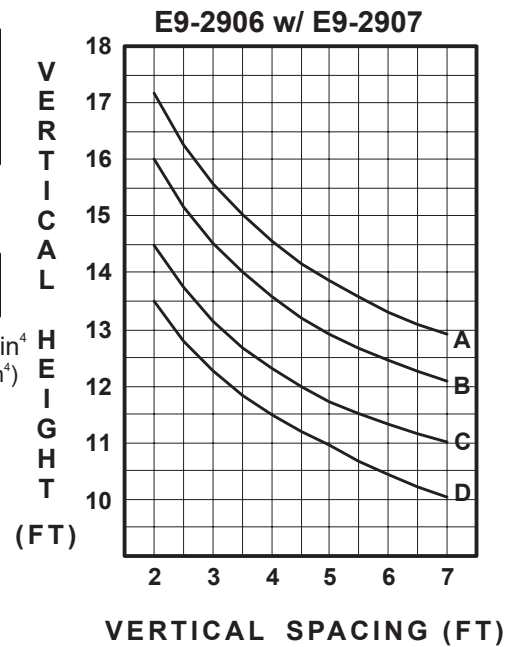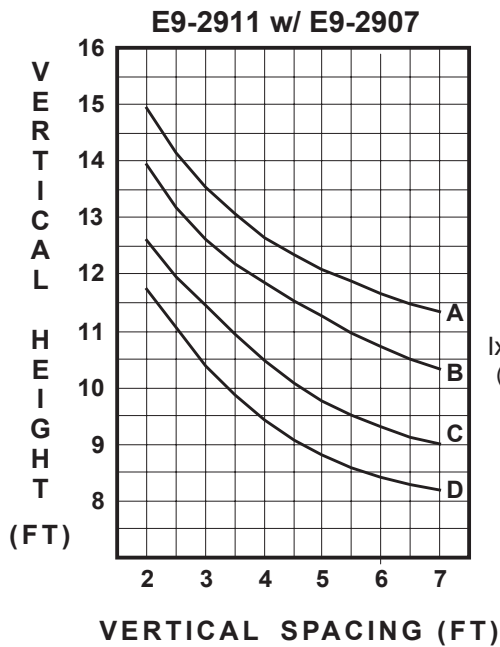


A=15 PSF (720 Pa)
B=20 PSF (960 Pa)
C=30 PSF (1440 Pa)
D=40 PSF (1920 Pa)

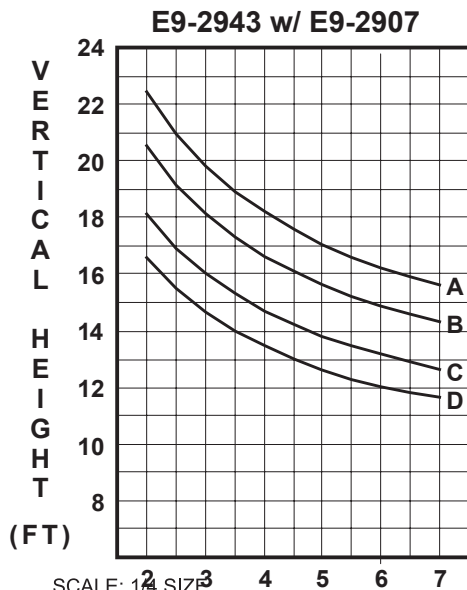

YES 60 FI DEAD LOAD CHARTS



E9-2903

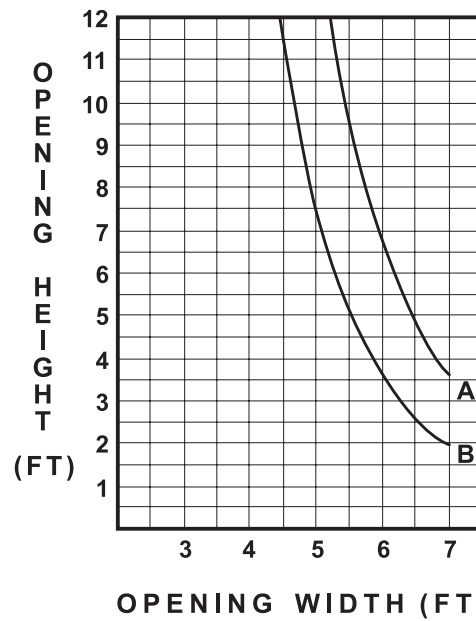

A = Setting Blocks at 1/8 Point Locations

B = Setting Blocks at 1/4 Point Locations

Note: Dead load requirements are based upon a maximum deflection of 1/8" (3.2mm) at the center of the horizontal.

