


TABLE OF CONTENTS


**YES 60 XT
THERMAL STOREFRONT SYSTEM FOR 1" GLAZING
2" x 6"**

PICTORIAL VIEWS	Page 2
FRAMING MEMBERS (1/4 SIZE)	Pages 3 to 5
WIND LOAD / DEAD LOAD CHARTS	Pages 6 & 7



*The latest installation instructions for this product are available at www.ykkap.com.

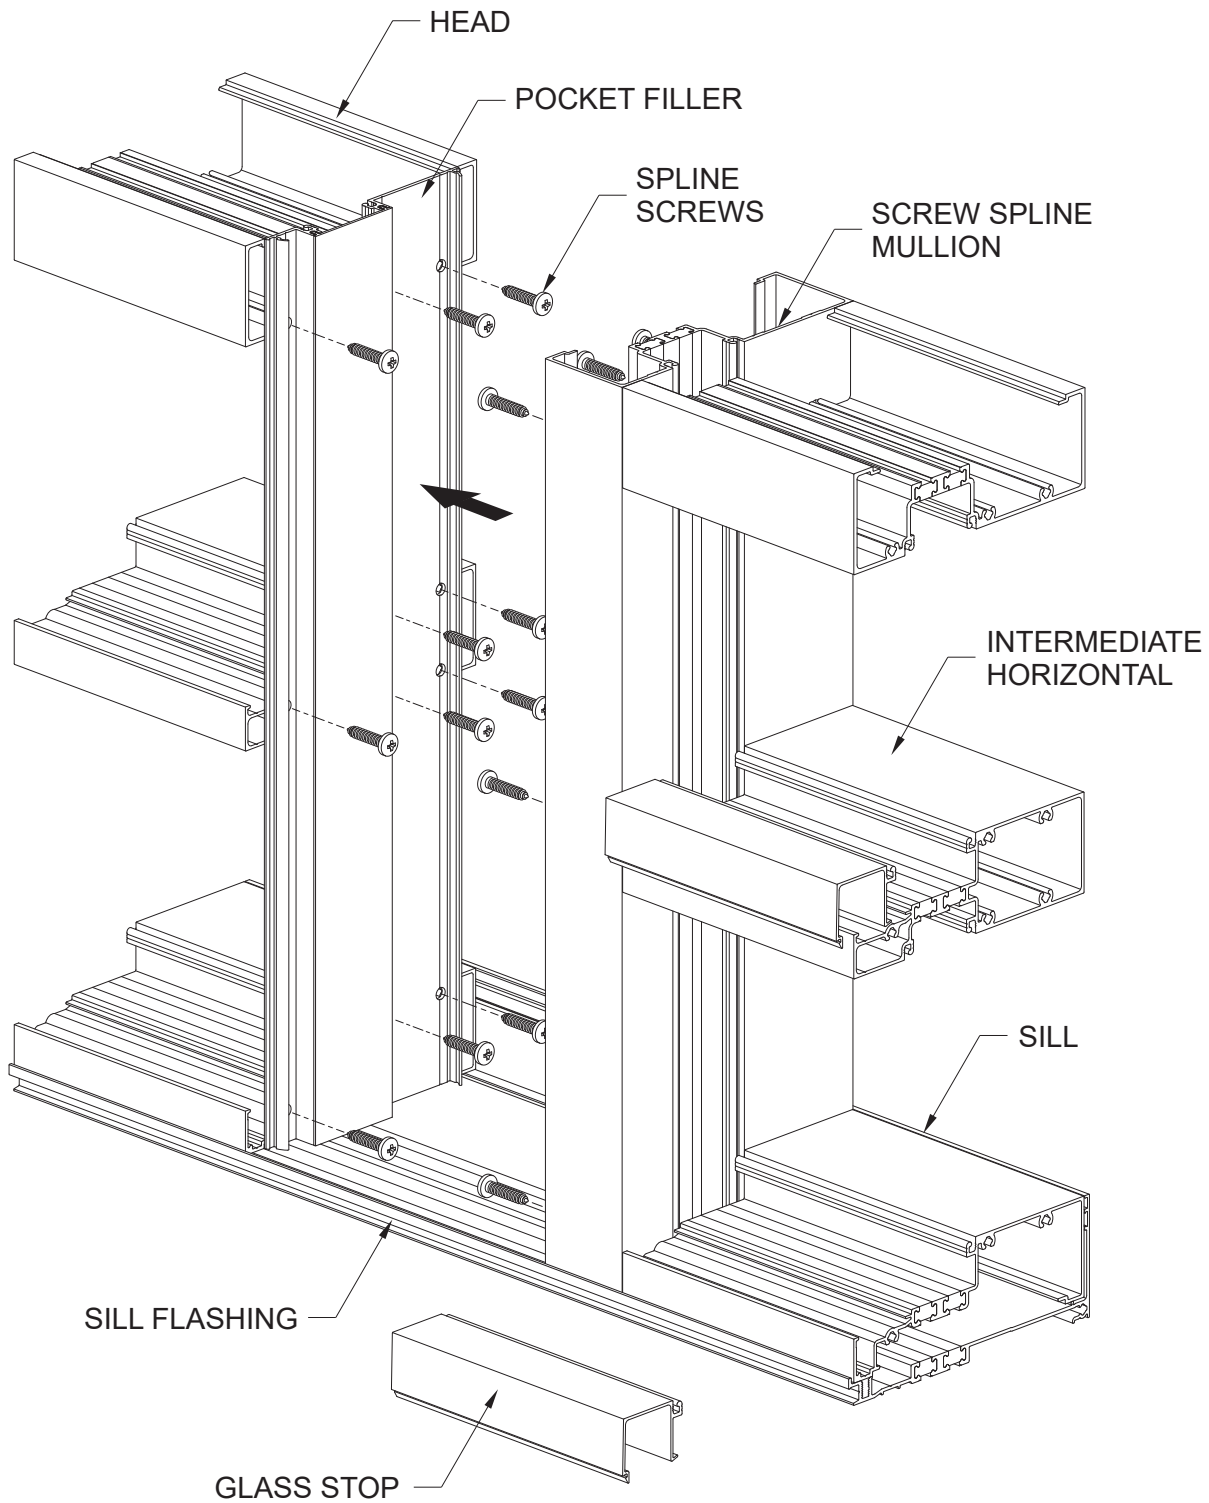


SCALE: 1/4 SIZE




YES 60 XT HORIZONTAL MEMBERS

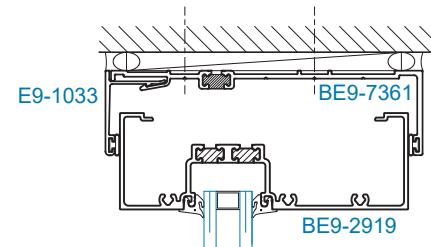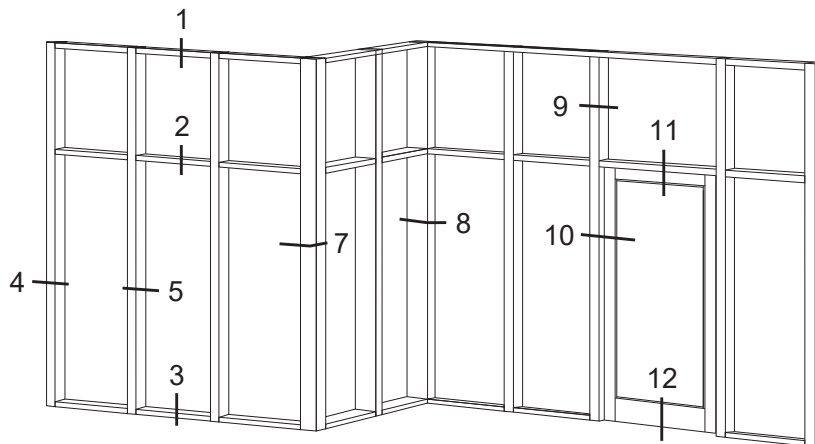


SECTION 1A
HEAD RECEPTOR

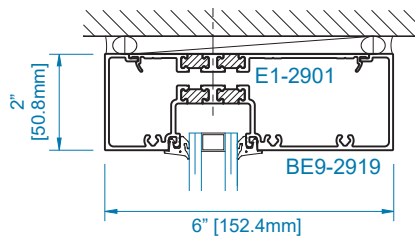


SECTION 1
HEAD

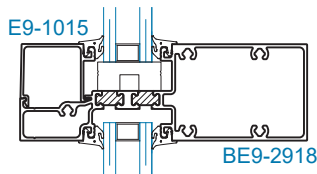


SECTION 2
HORIZONTAL

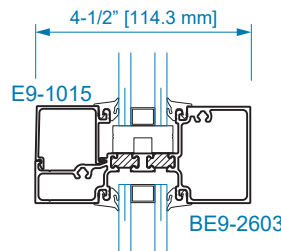




SECTION 2A
OPTIONAL 4-1/2"
DEPTH HORIZONTAL

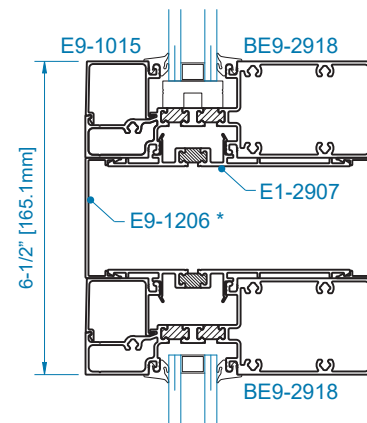


SECTION 2B
OPTIONAL COMPOUND
HORIZONTAL

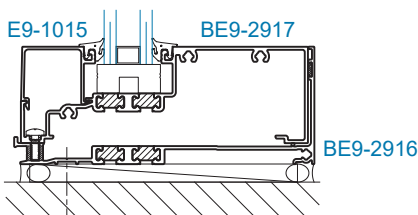

***SECTION 3**
SILL





SCALE: 1/4 SIZE




* Other face cover options available. Contact YKK AP for more information.


YES 60 XT VERTICAL AND CORNER MEMBERS

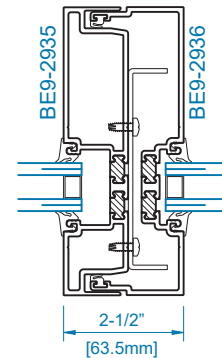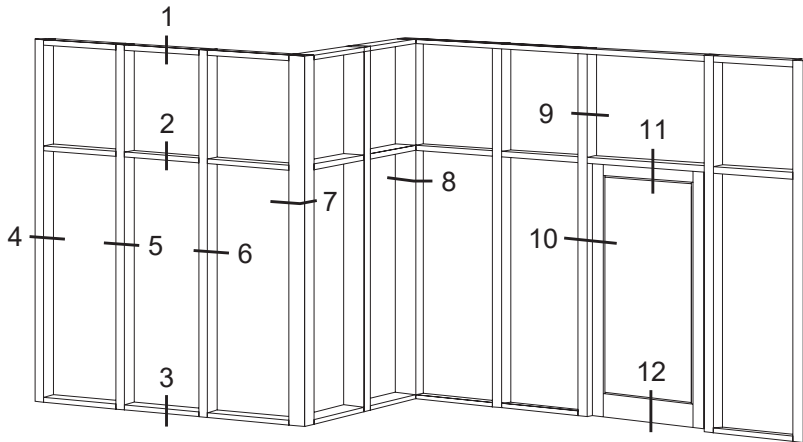


**SECTION 6
EXPANSION
MULLION**

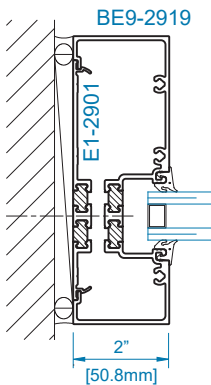


**SECTION 4
JAMB**

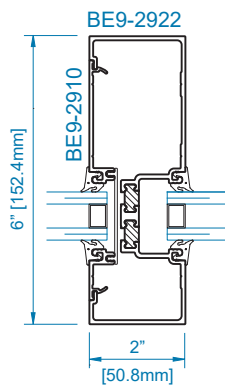


**SECTION 5
MULLION**

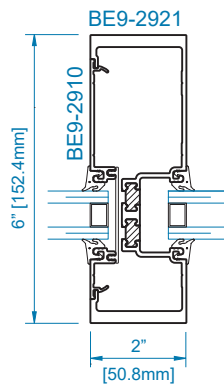


**SECTION 5A
HEAVY DUTY
MULLION**

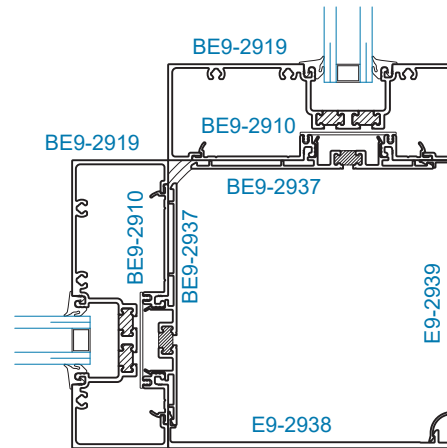


**SECTION 7
90° OUTSIDE
CORNER**

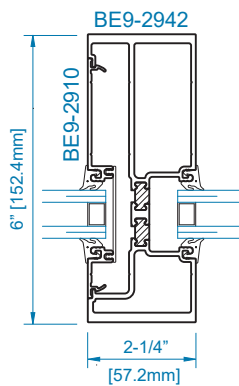

**SECTION 5B
HEAVY DUTY
MULLION**

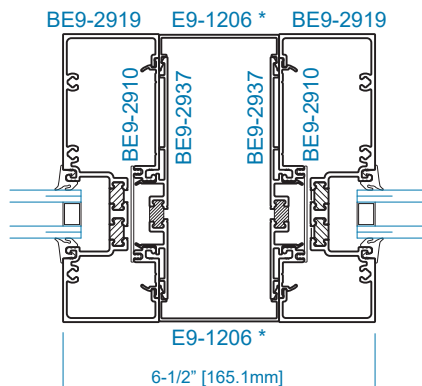


**SECTION 5C
OPTIONAL COMPOUND
MULLION**

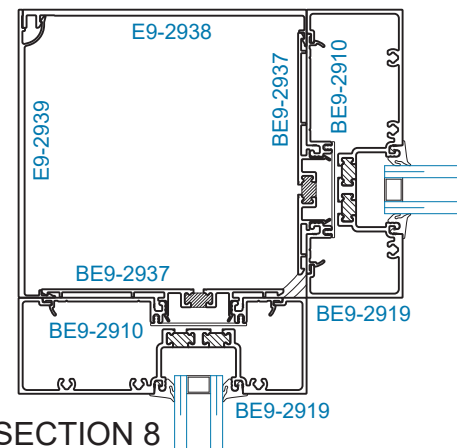



**SECTION 8
90° OUTSIDE
CORNER**

SCALE: 1/4 SIZE




* Other face cover options available. Contact YKK AP for more information.


YES 60 XT DOOR FRAMING MEMBERS W/ 35T DOORS

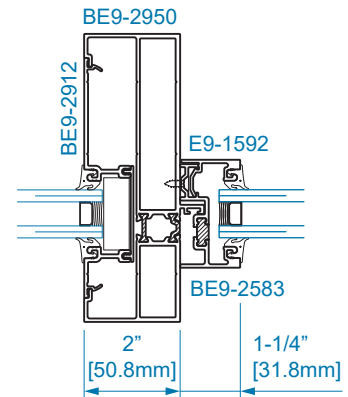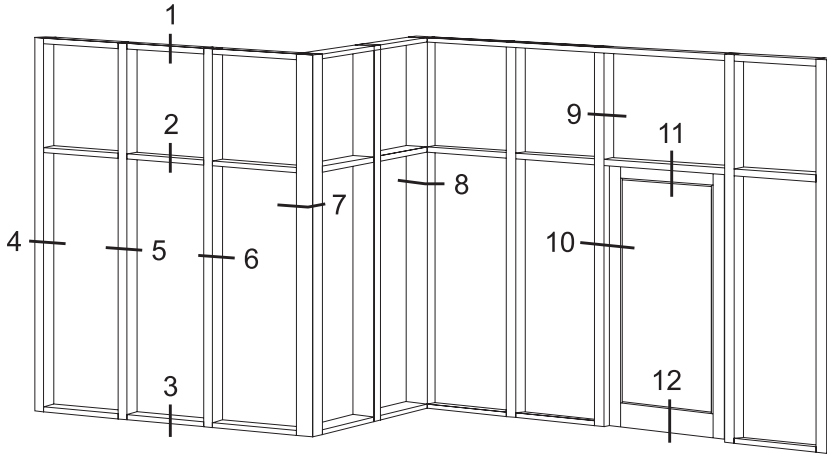


SECTION 9T
DOOR JAMB
@ TRANSOM

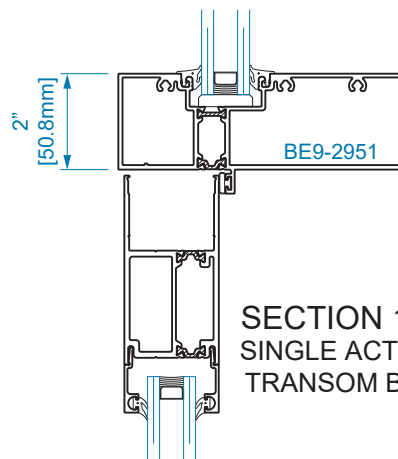


SECTION 11T
SINGLE ACTING
TRANSOM BAR

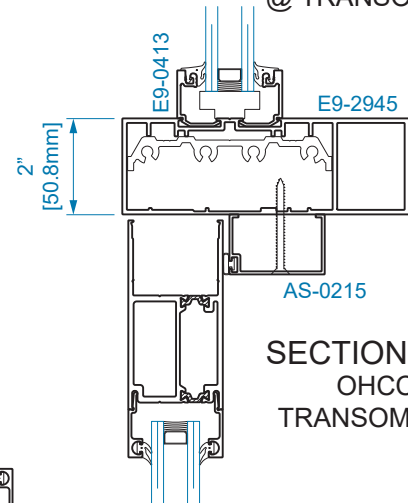


SECTION 11AT
OHCC
TRANSOM BAR

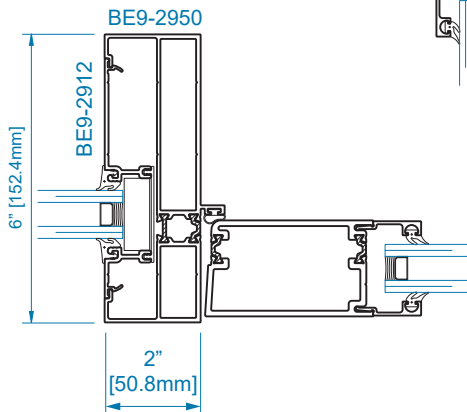

SECTION 10T
SINGLE ACTING
DOOR JAMB

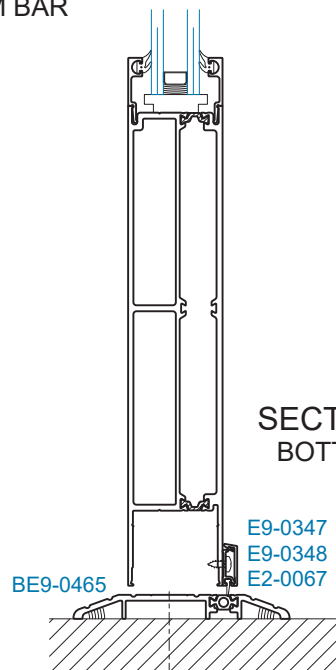

SECTION 12T
BOTTOM RAIL



YES 60 XT WIND LOAD CHARTS

DEFLECTION CRITERIA: AAMA TIR-A11 - $L/175$ FOR $\leq 13'-6"$ SPAN OR



$L/240 + 1/4"$ (6.4mm) - FOR SPANS GREATER THAN $13'-6"$ (4.1m) BUT LESS THAN $40'-0"$ (12.2m)

CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN $3/4"$ (19.1mm) ALONG SUPPORTED EDGE.


ALLOWABLE WIND LOAD STRESS

YKK AP tested standard. Contact YKK AP for more information.


These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span. For other applications, please contact YKK AP engineers at 1-866-955-2732.

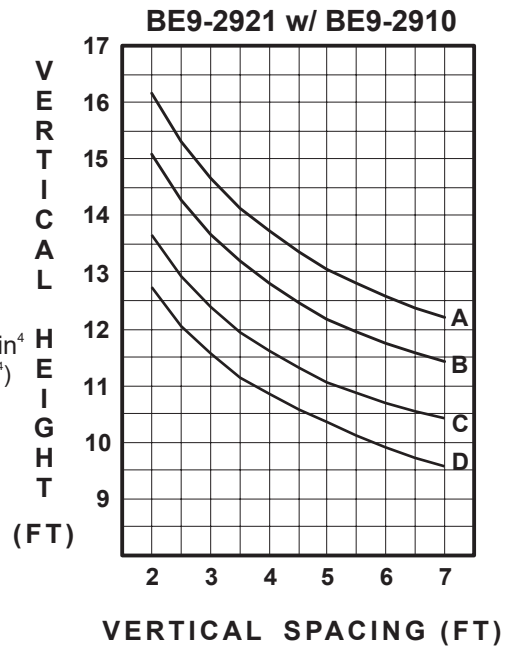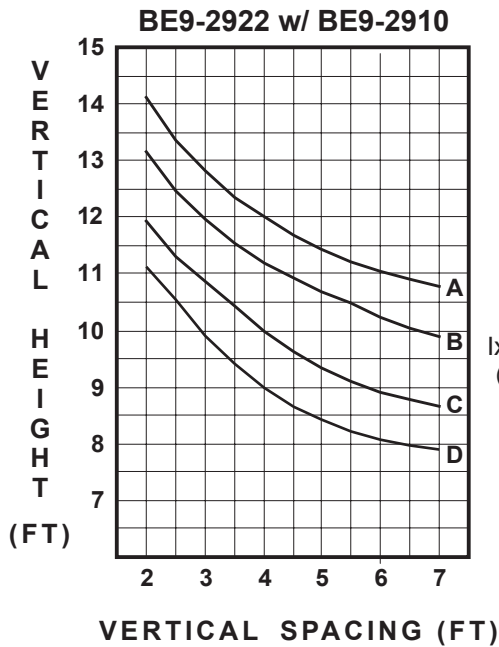


A=15 PSF (720 Pa)
B=20 PSF (960 Pa)
C=30 PSF (1440 Pa)
D=40 PSF (1920 Pa)

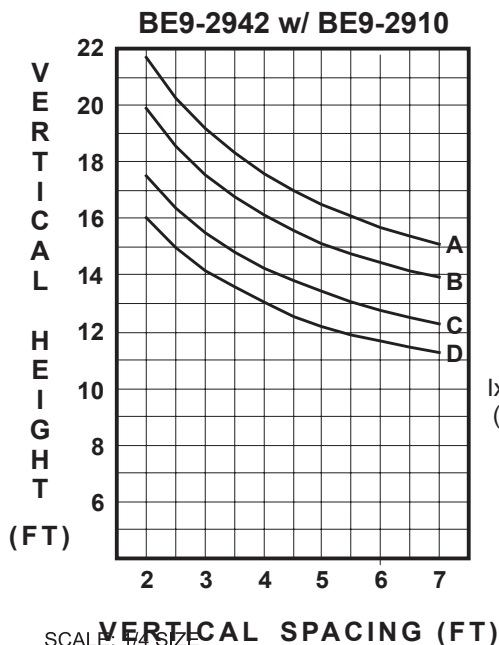

YES 60 XT DEAD LOAD CHARTS



BE9-2918

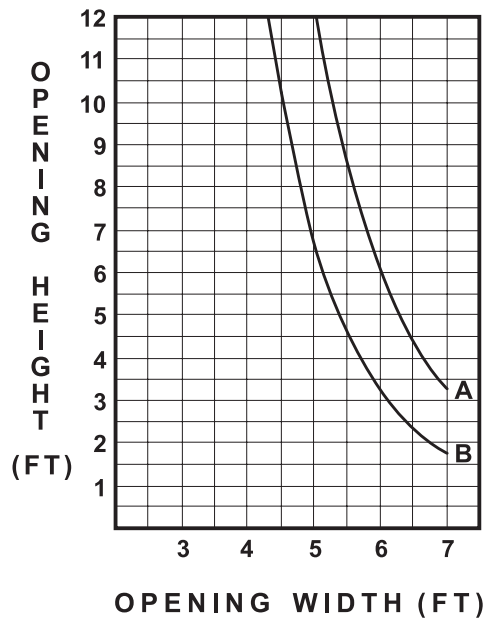

A = Setting Blocks at 1/8 Point Locations

B = Setting Blocks at 1/4 Point Locations

Note: Dead load requirements are based upon a maximum deflection of 1/8" (3.2mm) at the center of the horizontal.

SCALE: 1/4 SIZE

