



TABLE OF CONTENTS

YWE 60 T WINDOW WALL SYSTEM FOR 1/4" & 1" GLAZING
2-1/4" x 6"

PICTORIAL VIEWS Page 2 to 3


FRAMING MEMBERS (1/4 SIZE) Page 4 to 6

DOOR FRAMING MEMBERS (1/4 SIZE) Page 7


WIND LOAD / DEAD LOAD CHARTS..... Page 8 to 10

*The latest installation instructions for this product are available at www.ykkap.com.


VERTICAL THROUGH

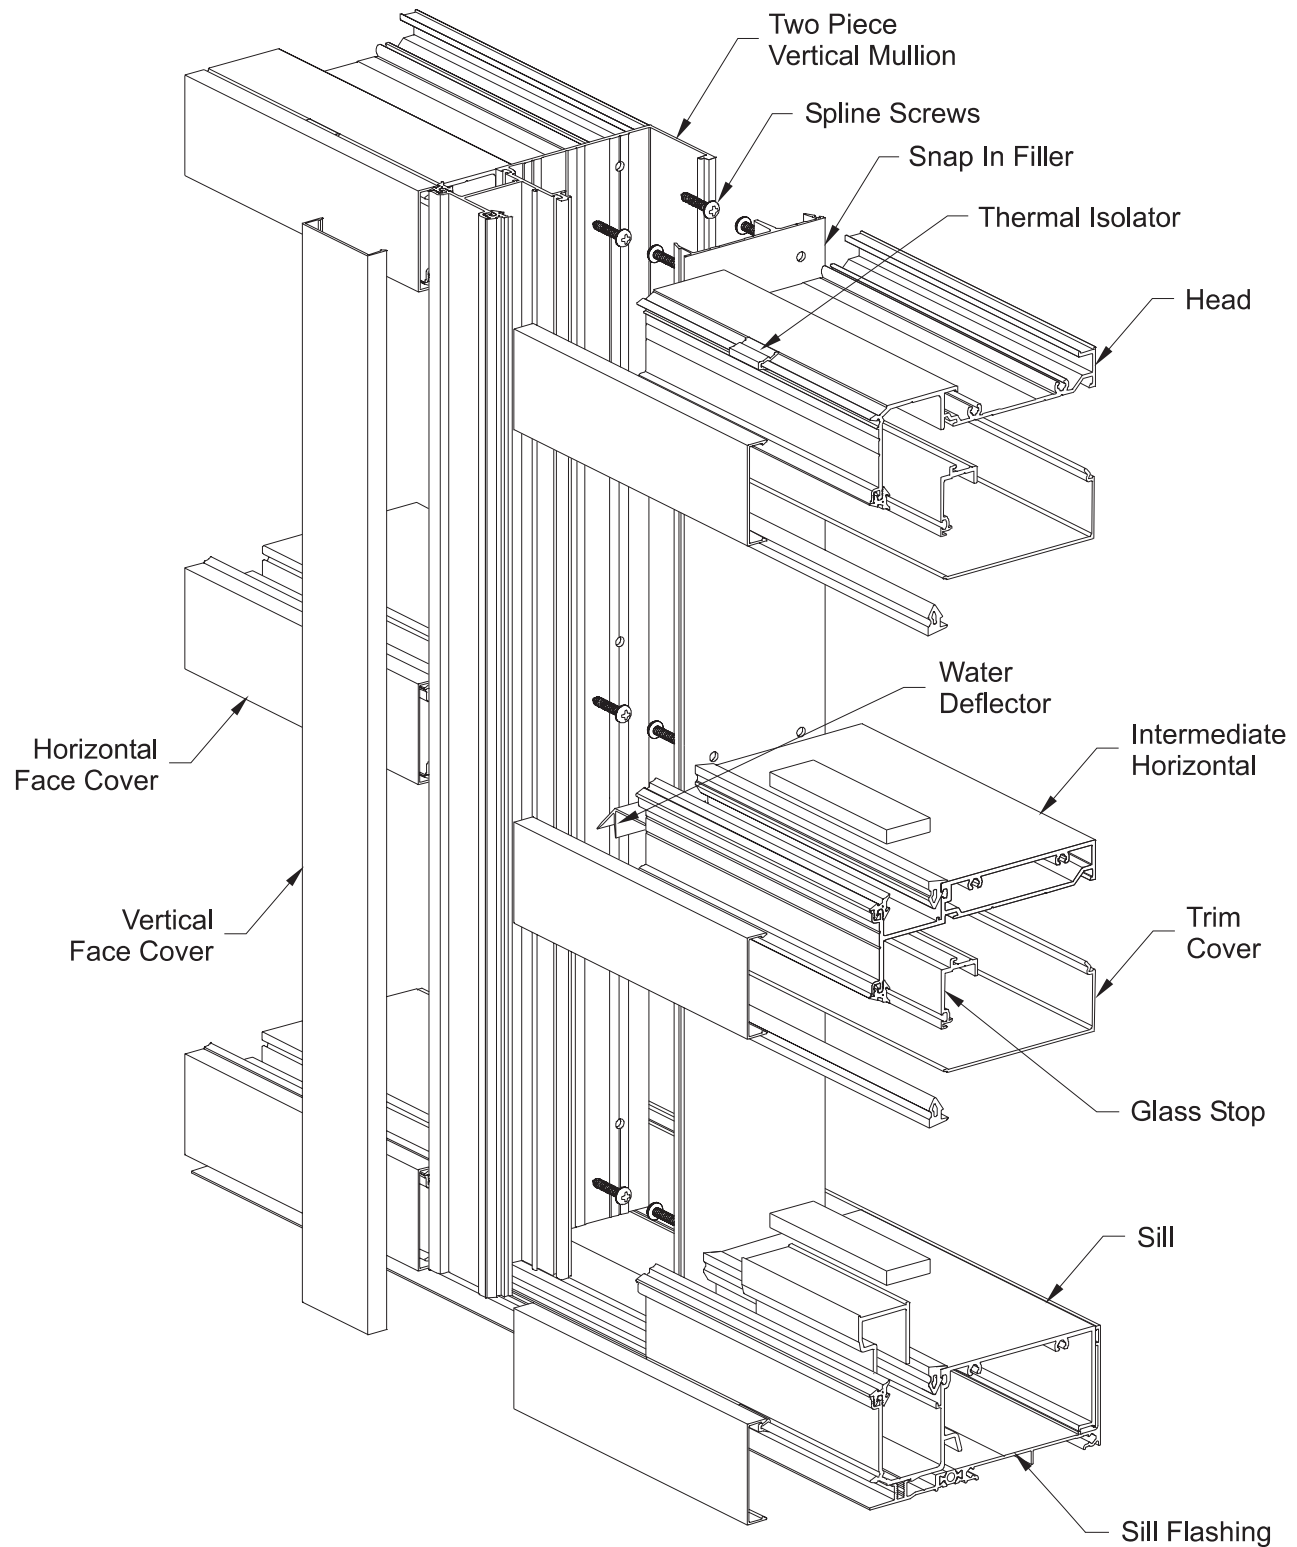


CONTINUOUS HEAD & SILL

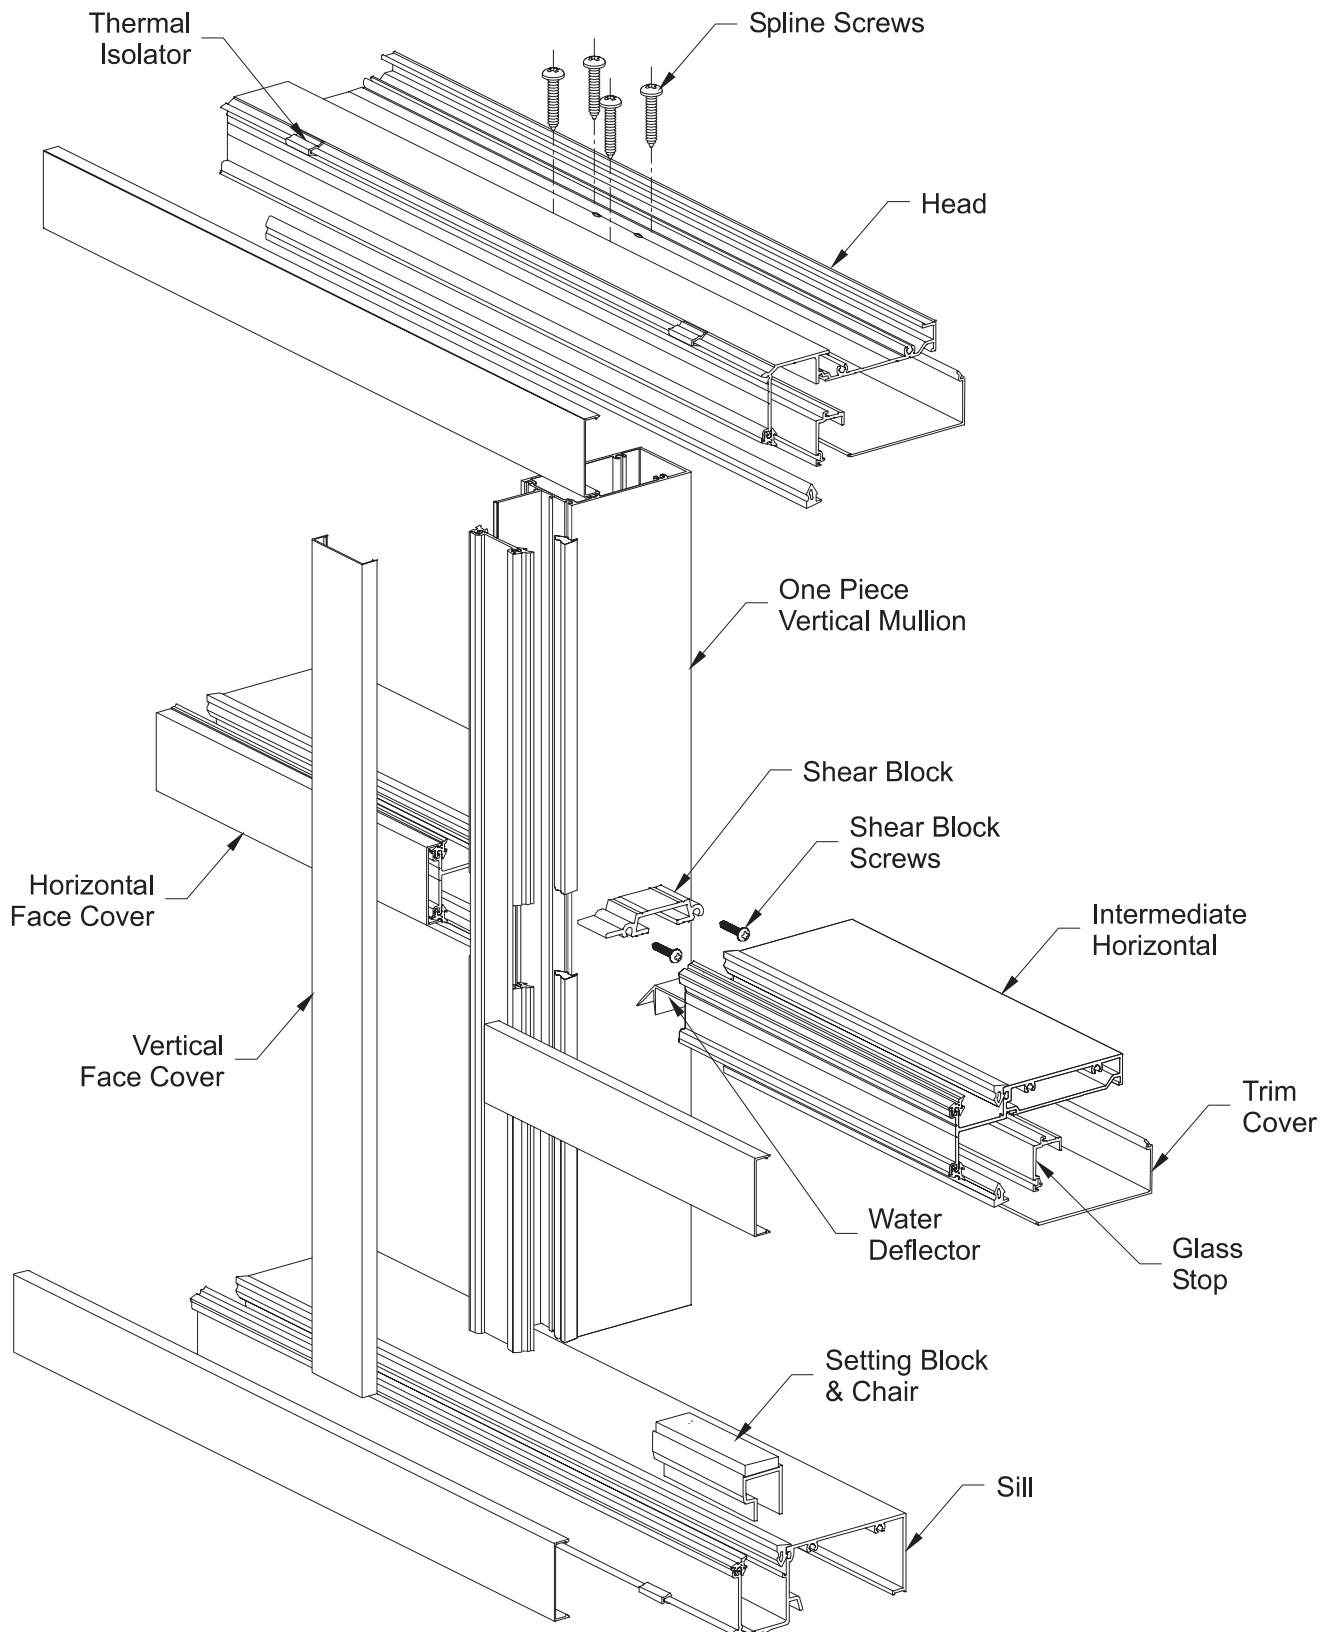


VERTICAL THROUGH

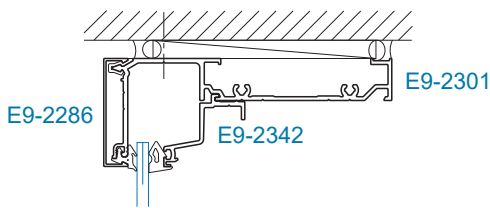


SECTION 1
HEAD WITH
1/4" GLAZING ADAPTOR

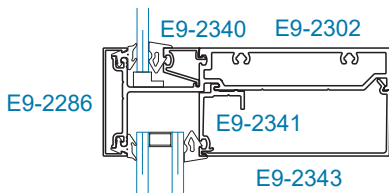


SECTION 2
HORIZONTAL WITH
1/4" GLAZING ADAPTOR

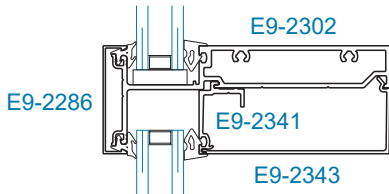



SECTION 3
HORIZONTAL

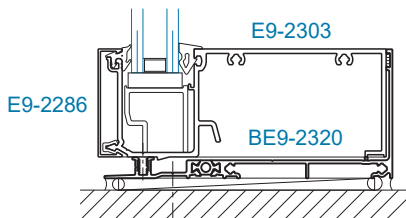

SECTION 4
SILL w/ THERMAL SILL FLASHING

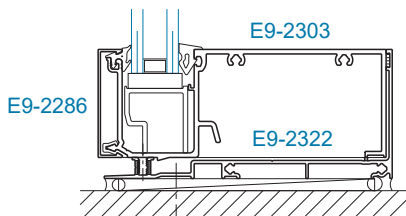


SECTION 4A
SILL w/ ECONOMY SILL FLASHING

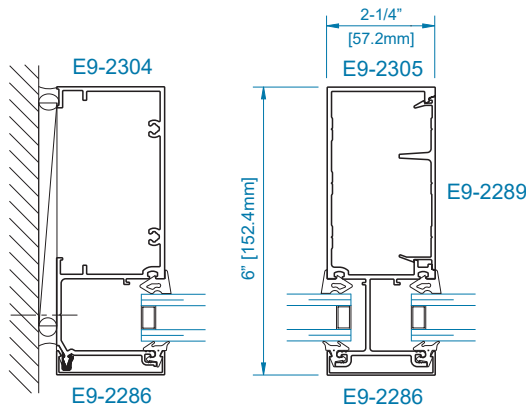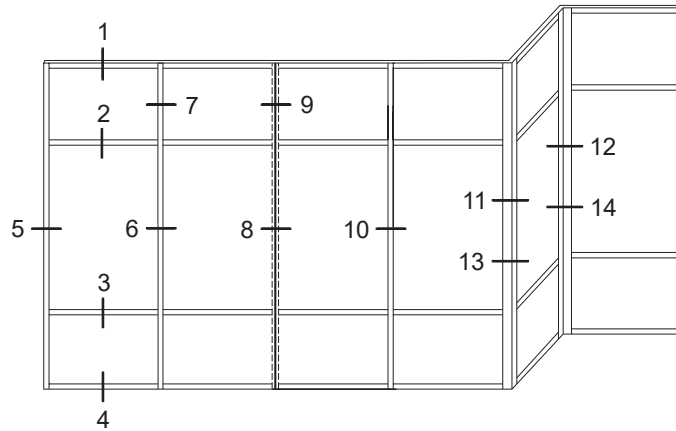


SECTION 5
JAMB


SECTION 6
VERTICAL

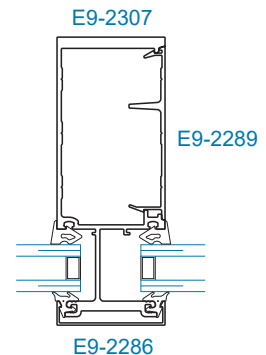


SECTION 6A
HEAVY DUTY
VERTICAL

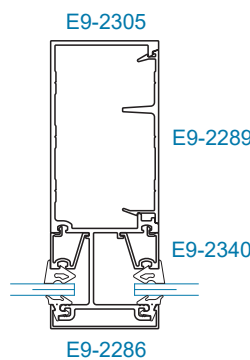


SECTION 7
VERTICAL WITH 1/4"
GLAZING ADAPTOR

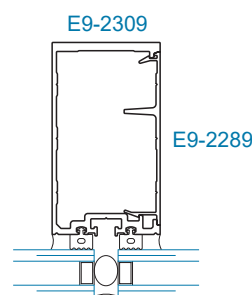



SECTION 8
SSG VERTICAL
1" GLAZING

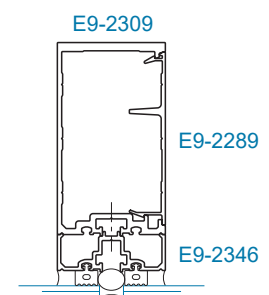


SECTION 9
SSG VERTICAL
WITH 1/4" GLAZING
ADAPTOR




VERTICAL THROUGH

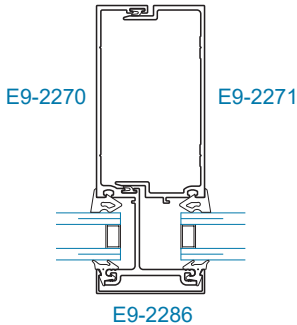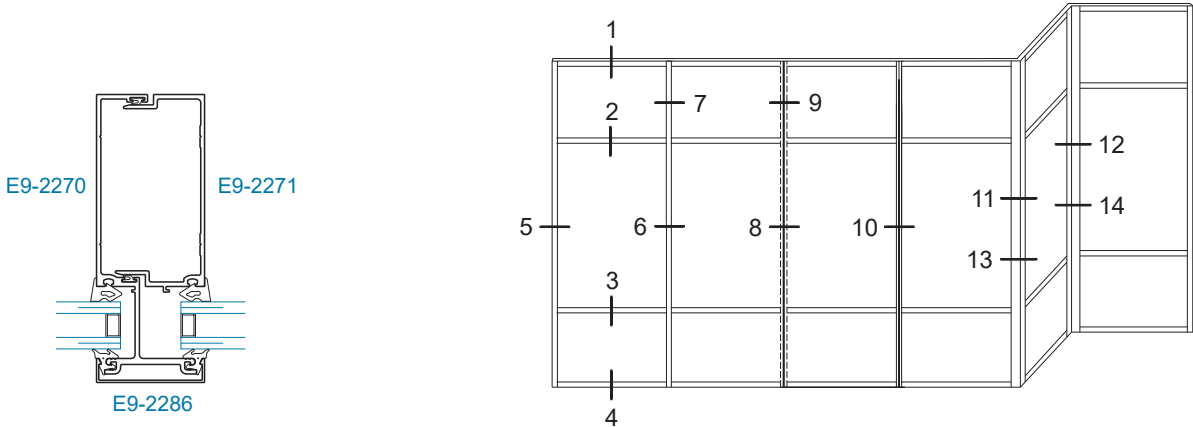


SECTION 10
EXPANSION
MULLION

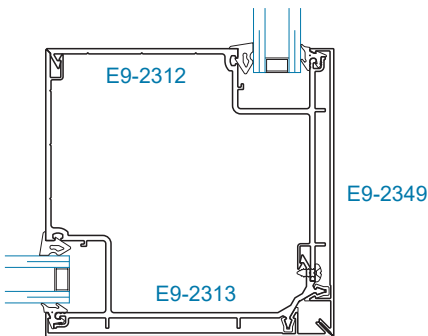


SECTION 11
90° OUTSIDE CORNER

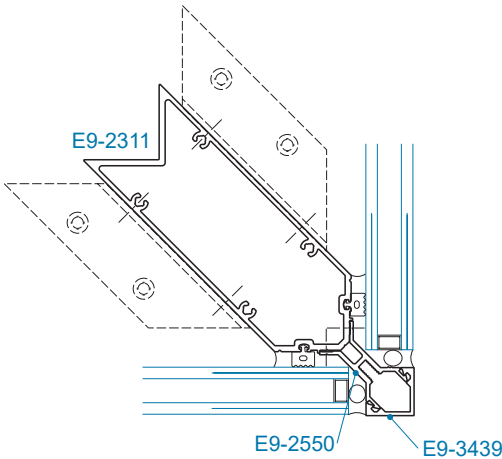


SECTION 11A
SSG 90° OUTSIDE CORNER
WITH 1/4" GLAZING ADAPTOR

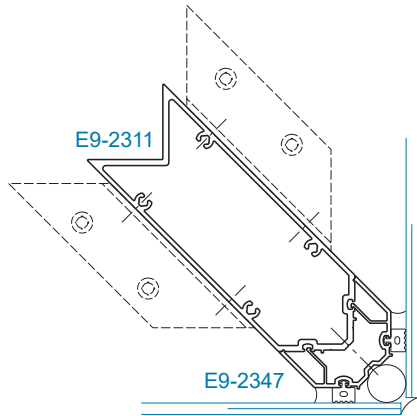


SECTION 11B
SSG 90° OUTSIDE CORNER
WITH 1/4" GLAZING ADAPTOR

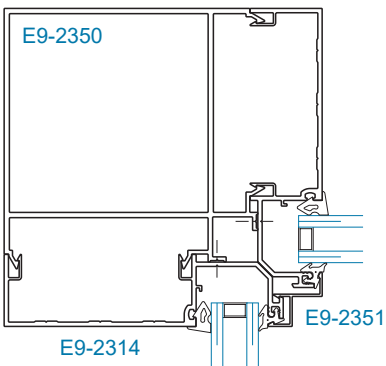


SECTION 12
90° INSIDE CORNER

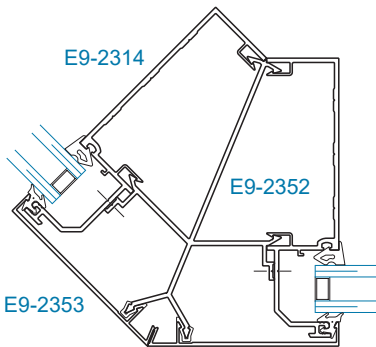


SECTION 13
135° OUTSIDE CORNER

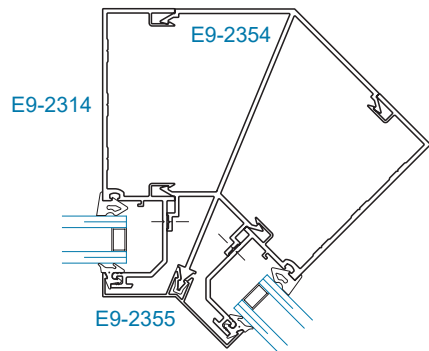


SECTION 14
135° INSIDE CORNER




CONTINUOUS HEAD & SILL

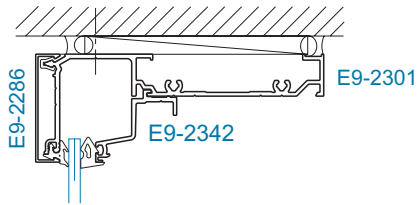


SECTION 1
HEAD WITH 1/4"
GLAZING ADAPTOR

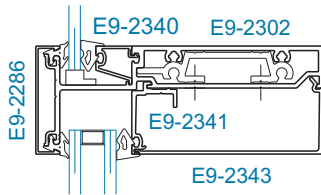


SECTION 2
HORIZONTAL WITH 1/4"
GLAZING ADAPTOR

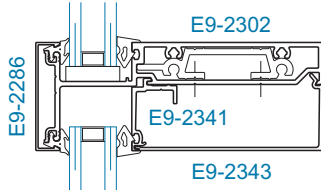


SECTION 3
HORIZONTAL

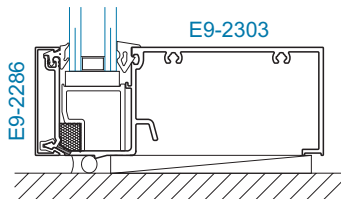


SECTION 4
SILL

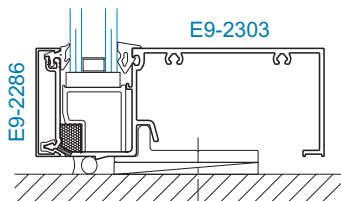


SECTION 4A
SILL WITH SILL ANCHOR

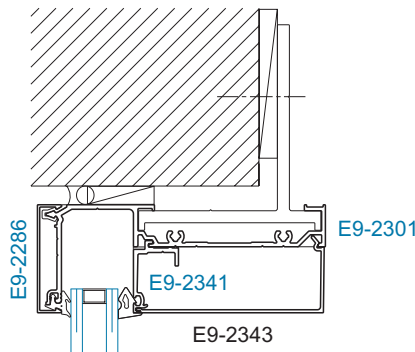


SECTION 1A
HEAD WITH
HEAD ANCHOR

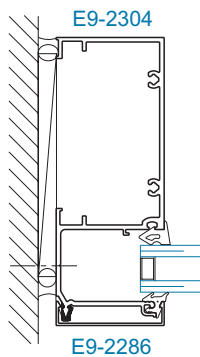


SECTION 5
JAMB

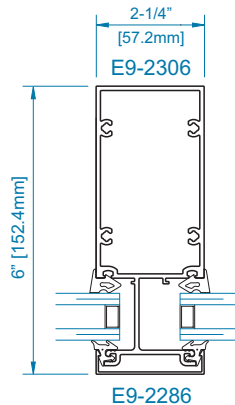


SECTION 6
TUBULAR
VERTICAL

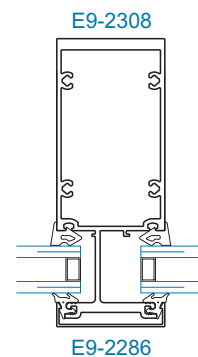


SECTION 6A
HEAVY DUTY
TUBULAR VERTICAL

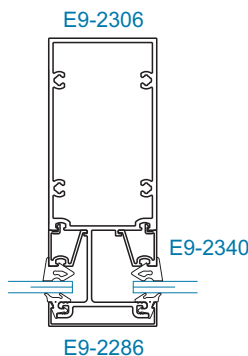


SECTION 7
VERTICAL WITH 1/4"
GLAZING ADAPTOR

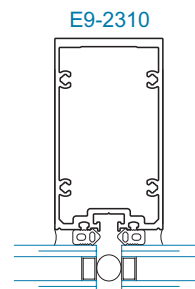


SECTION 8
SSG TUBULAR
VERTICAL

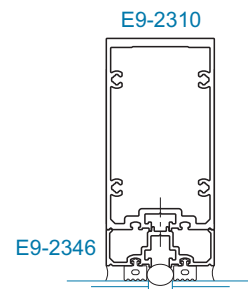


SECTION 9
SSG TUBULAR
VERTICAL WITH 1/4"
GLAZING ADAPTOR

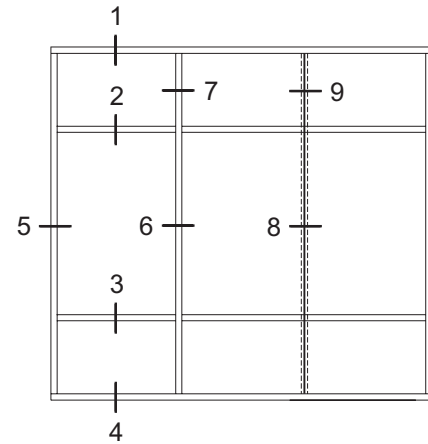


SCALE: 1/4 SIZE




DOOR FRAMING MEMBERS

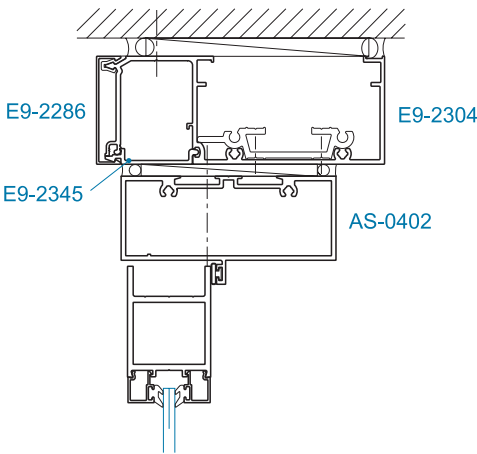


SECTION 15
DOOR HEAD
WITHOUT TRANSOM

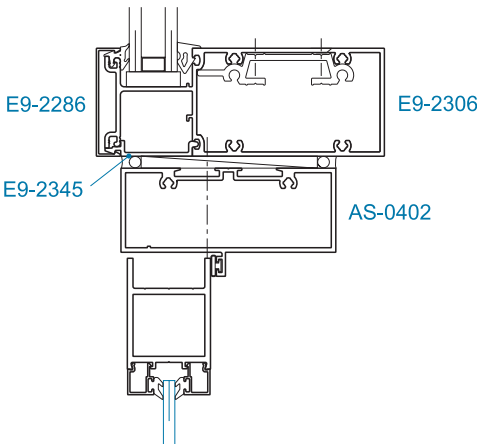



SECTION 15A
TRANSOM BAR

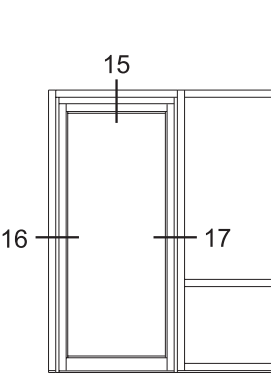


SECTION 16
DOOR JAMB
WITHOUT SIDELITE

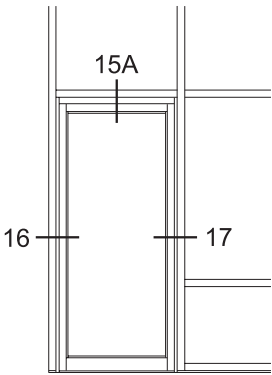

SECTION 17
DOOR JAMB
WITH SIDELITE

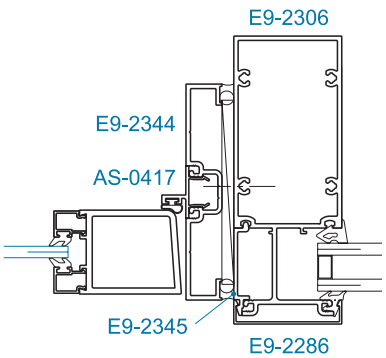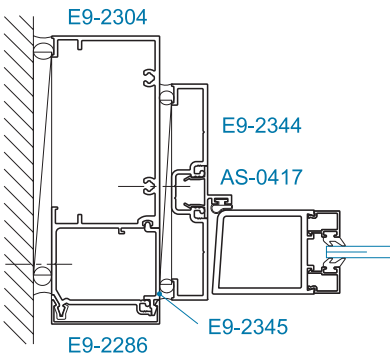

SCALE: 1/4 SIZE



WIND LOAD CHARTS

DEFLECTION CRITERIA: AAMA TIR-A11 - L/175 or


$L/240 + 1/4"$ (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)

CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN 3/4" (19.1mm)



ALLOWABLE WIND LOAD STRESS

YKK AP tested standard. Contact YKK AP for more information.


These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span. For other applications, please contact YKK AP engineers at 1-866-955-2732.

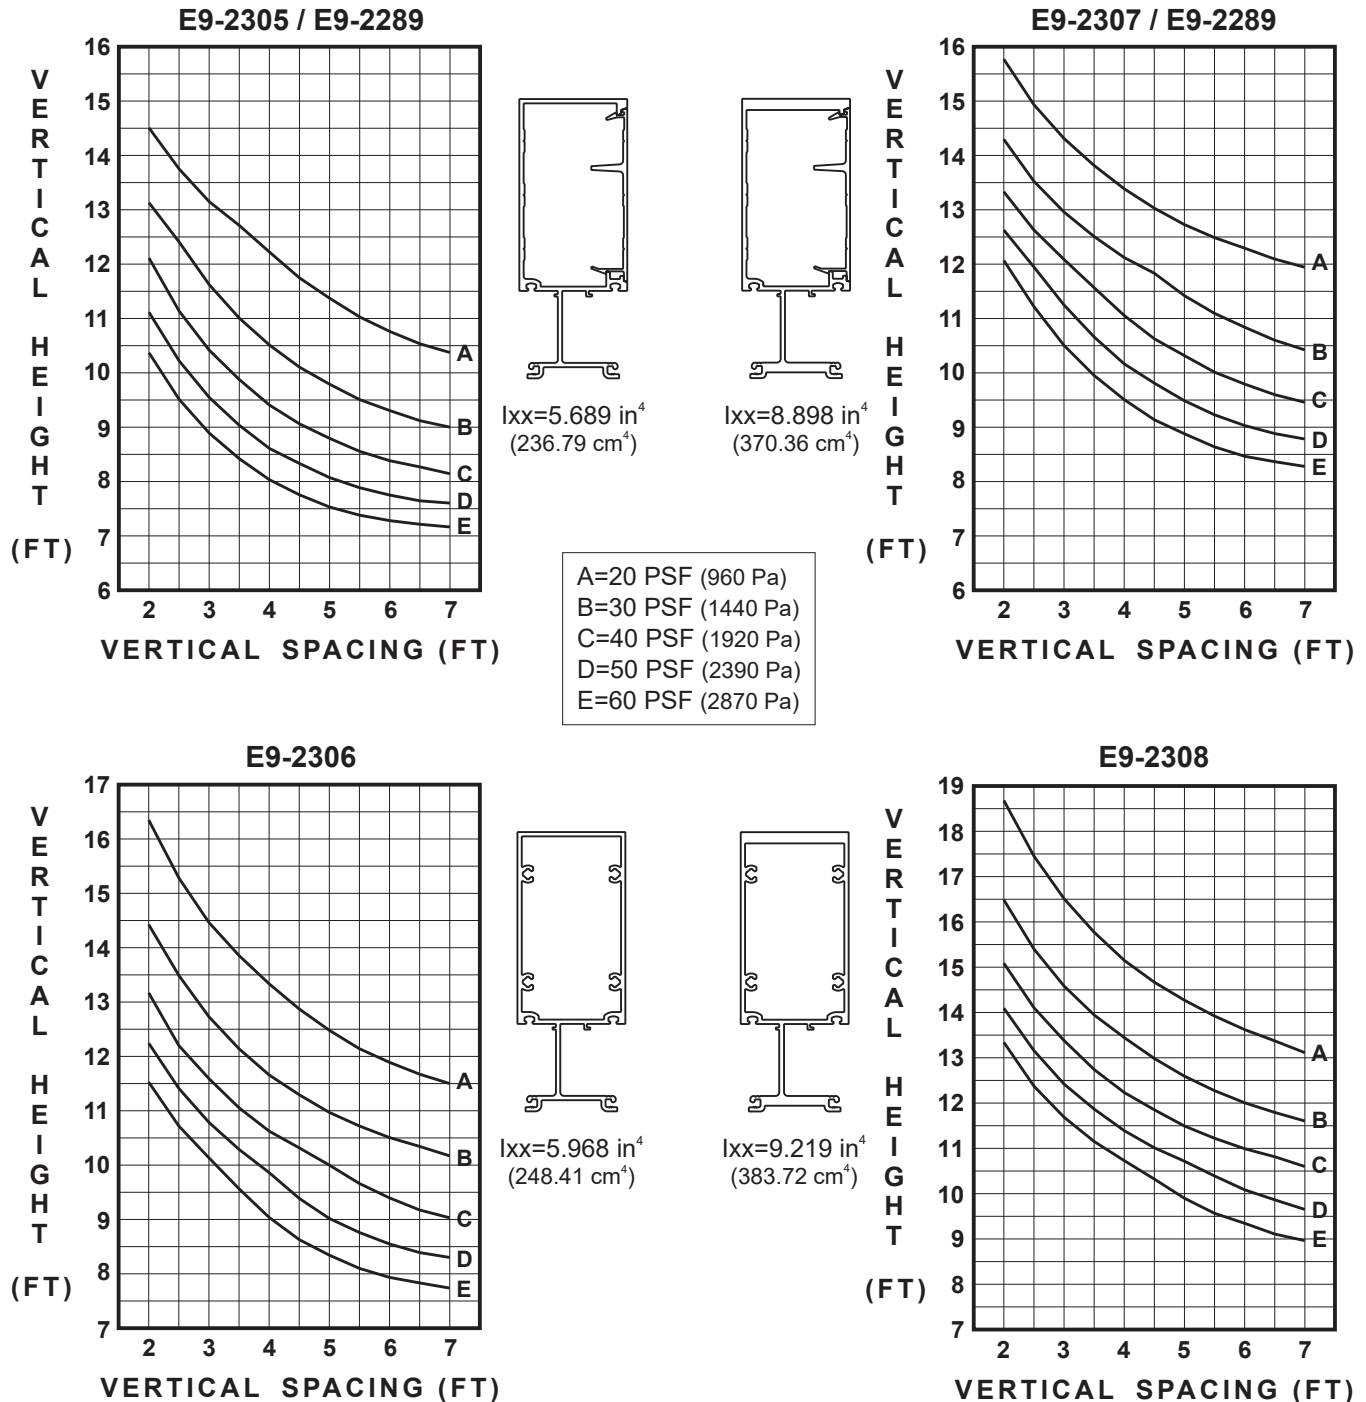


WIND LOAD CHARTS

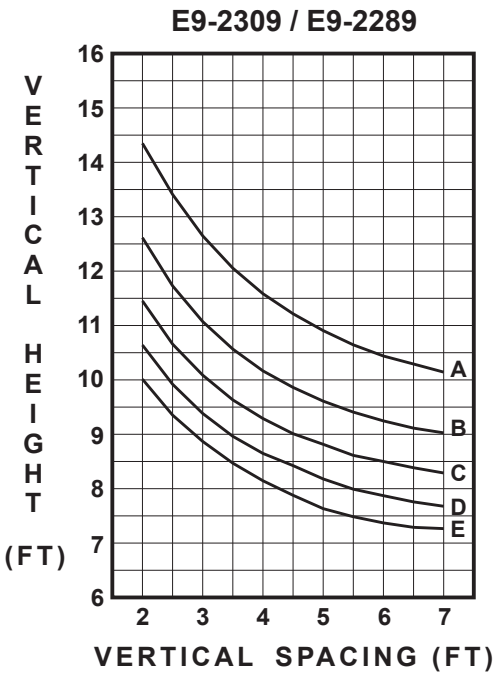

$I_{xx}=3.897 \text{ in}^4$
(162.21 cm^4)




$I_{xx}=3.832 \text{ in}^4$
(159.50 cm^4)


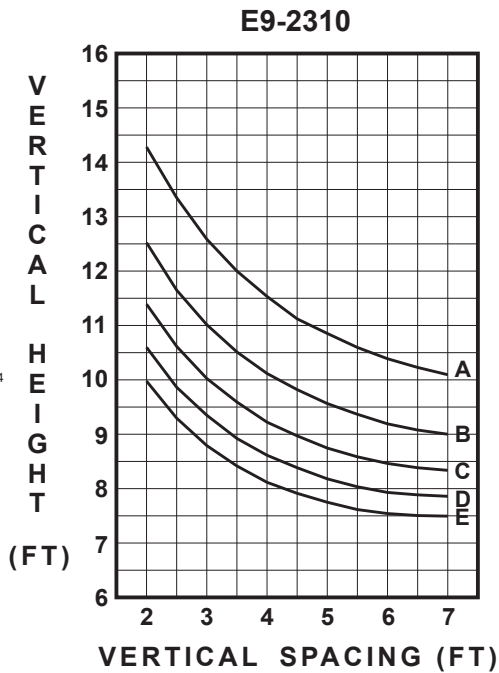


A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

DEAD LOAD CHARTS



E9-2302 (1" Glazing)

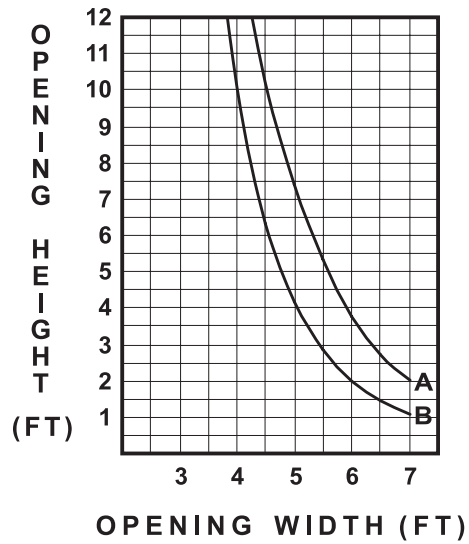

E9-2302 (1/4" Glazing)

