


TABLE OF CONTENTS

YWW 50 T WINDOW WALL SYSTEM FOR 1" GLAZING
2-1/4" x 5"


PICTORIAL VIEWS	Page 2 to 3
FRAMING MEMBERS (1/4 SIZE) FOR INTERIOR GLAZING	Page 4 to 5
FRAMING MEMBERS (1/4 SIZE)	Page 6 to 7
FOR EXTERIOR GLAZING	
FRAMING MEMBERS (1/4 SIZE)	Page 8 to 9
FOR STRUCTURAL SILICONE GLAZING	
CORNER FRAMING MEMBERS (1/4 SIZE)	Page 10
DOOR FRAMING MEMBERS (1/4 SIZE)	Page 11 & 12
YWW 50 T WIND LOAD / DEAD LOAD CHARTS	Page 13 to 14

*The latest installation instructions for this product are available at www.ykkap.com.











INTERIOR GLAZING SYSTEM

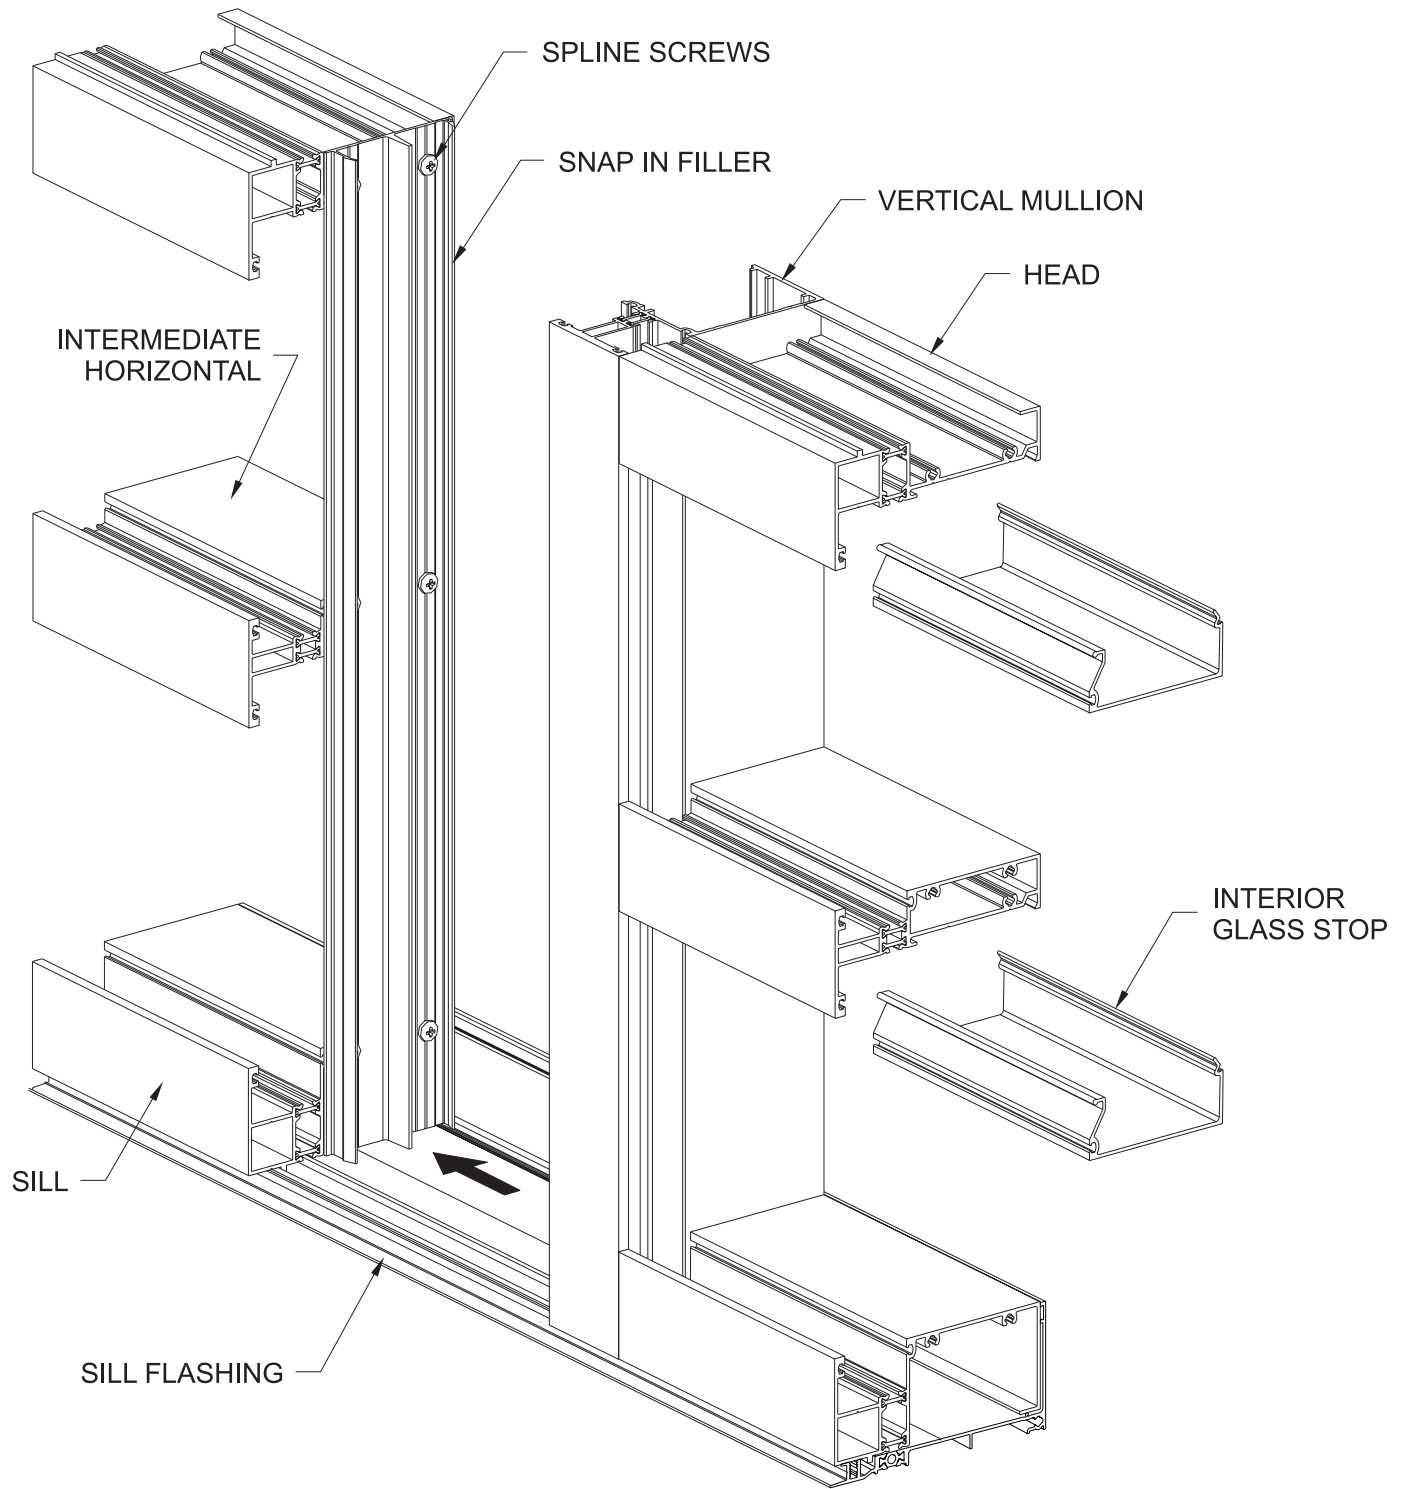


EXTERIOR GLAZING SYSTEM

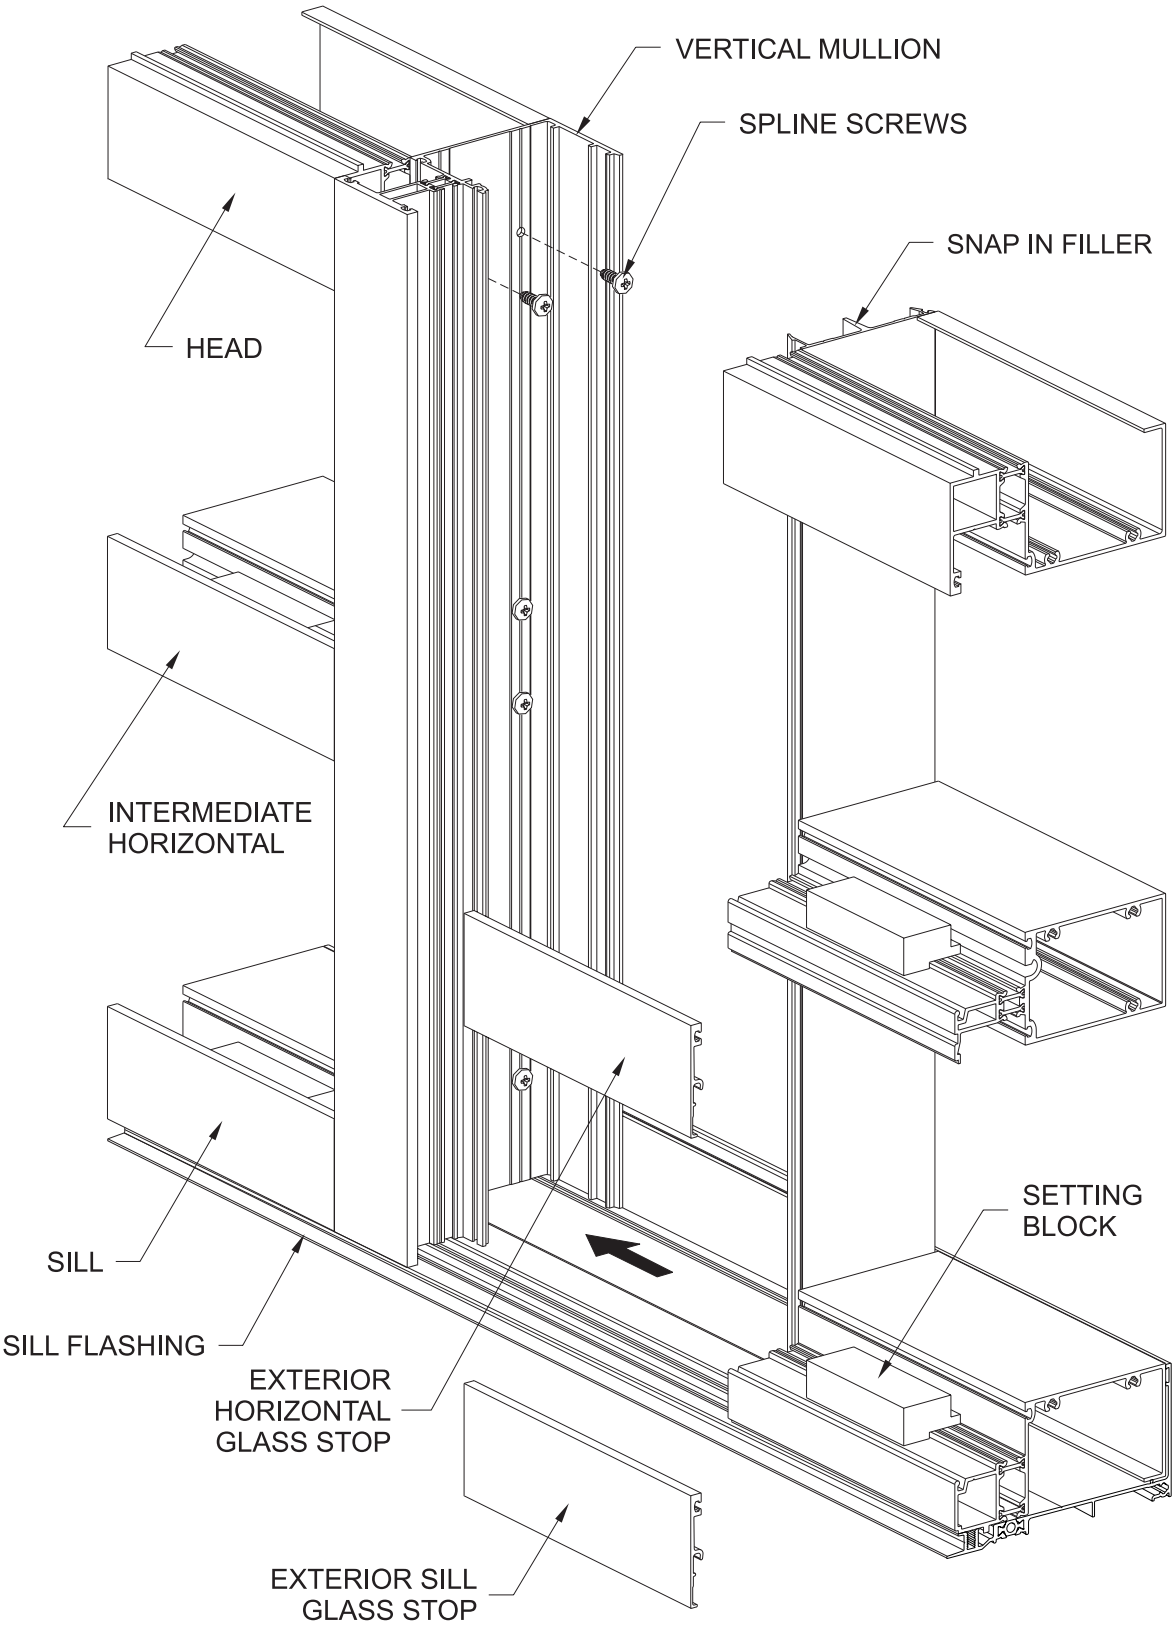



FRAMING MEMBERS FOR INTERIOR GLAZING

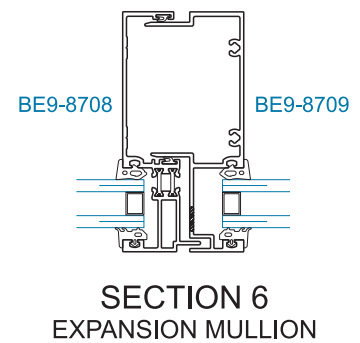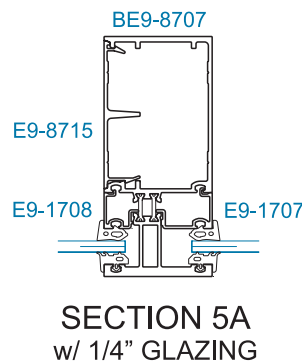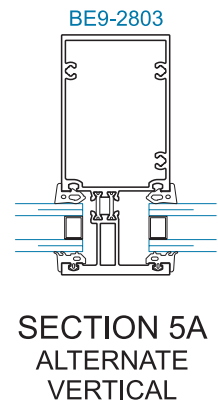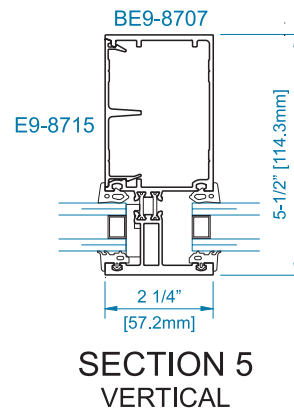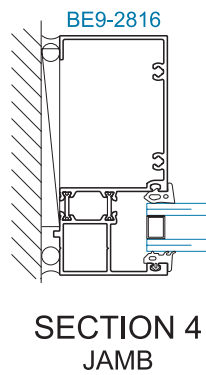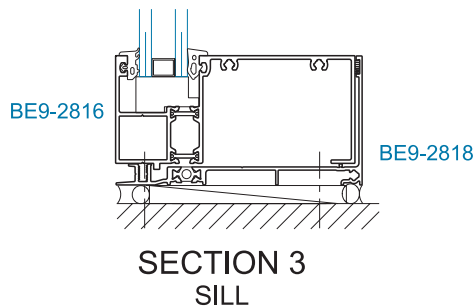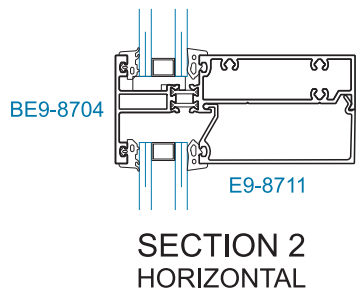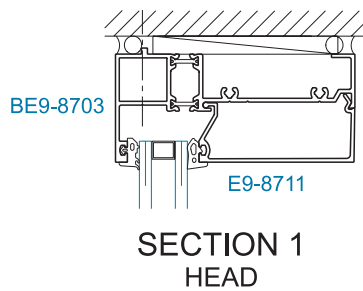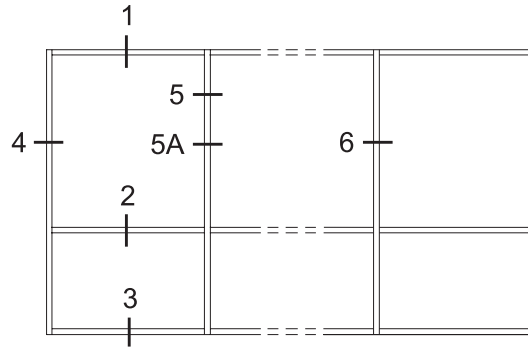



FRAMING MEMBERS FOR INTERIOR GLAZING

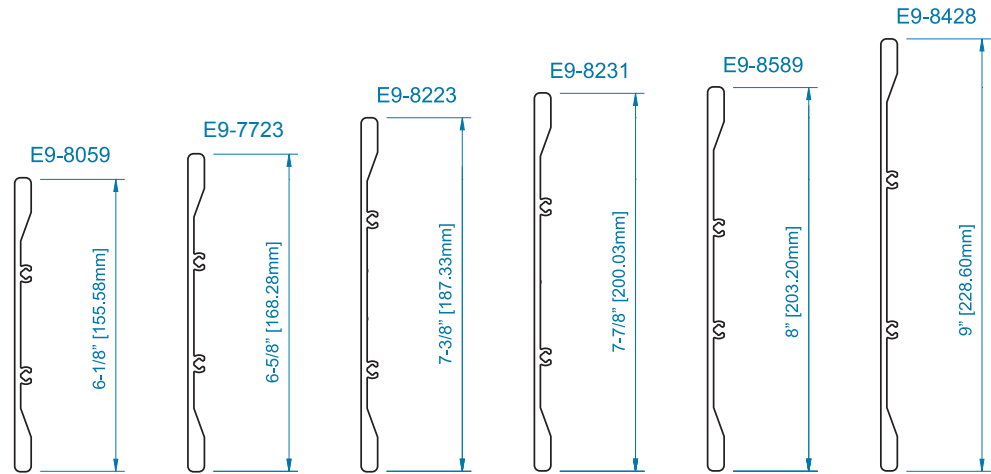


STANDARD SLAB EDGE COVERS

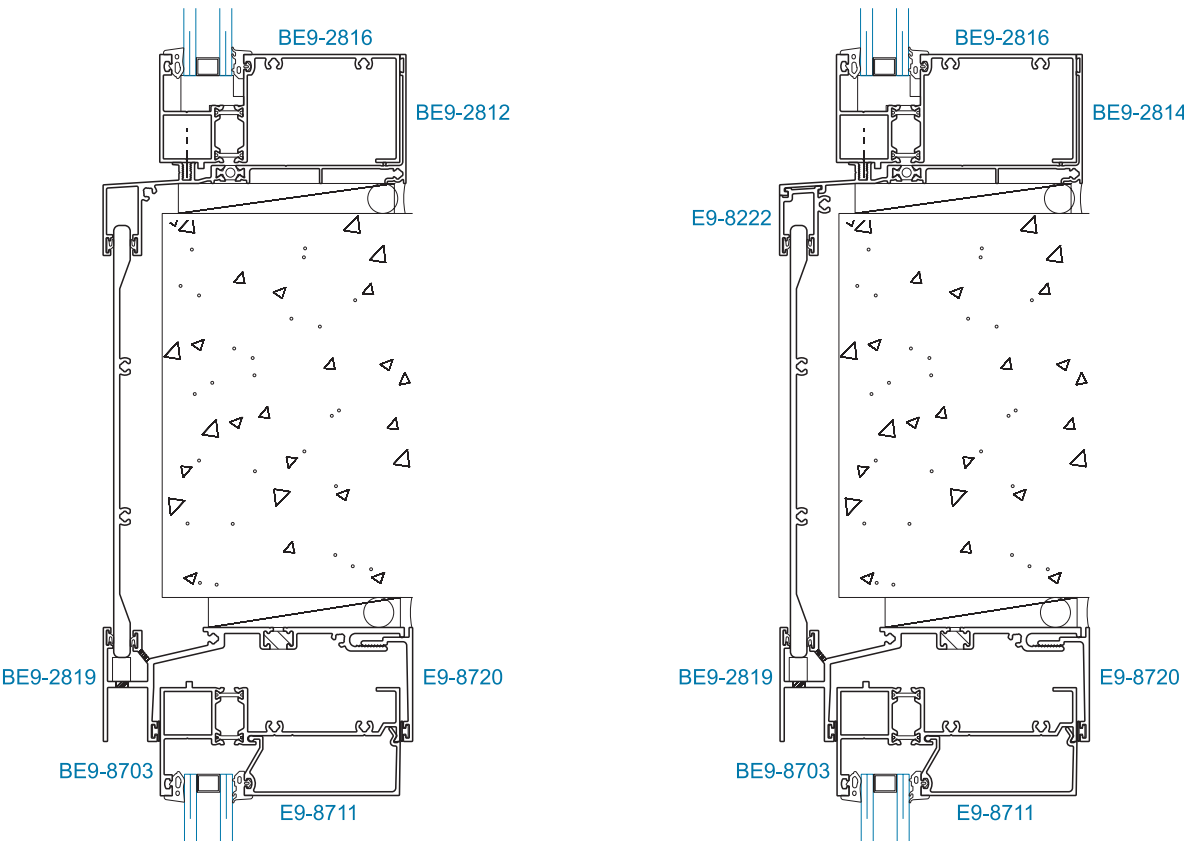


FRAMING MEMBERS FOR EXTERIOR GLAZING

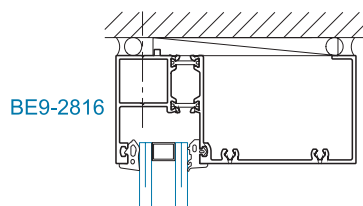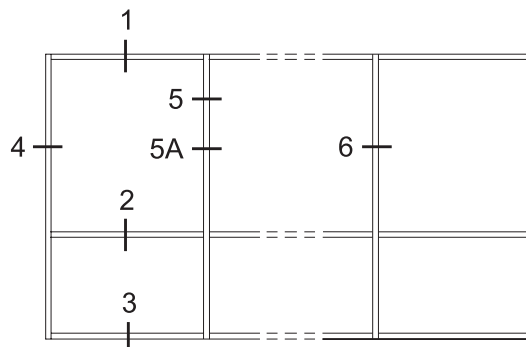


**SECTION 1
HEAD**




**SECTION 2
HORIZONTAL**

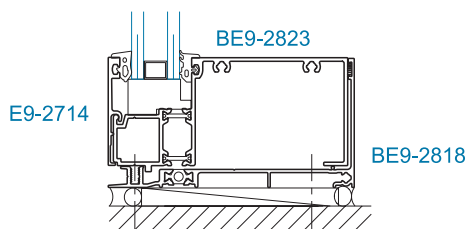


**SECTION 3
SILL**




**SECTION 4
JAMB**




**SECTION 5
VERTICAL**




**SECTION 5A
ALTERNATE
VERTICAL**





**SECTION 5A
w/ 1/4" GLAZING**

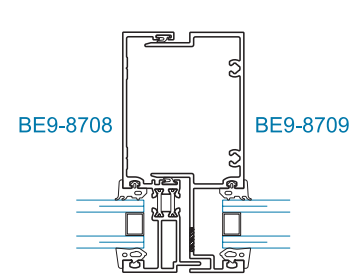


**SECTION 6
EXPANSION MULLION**




FRAMING MEMBERS FOR EXTERIOR GLAZING

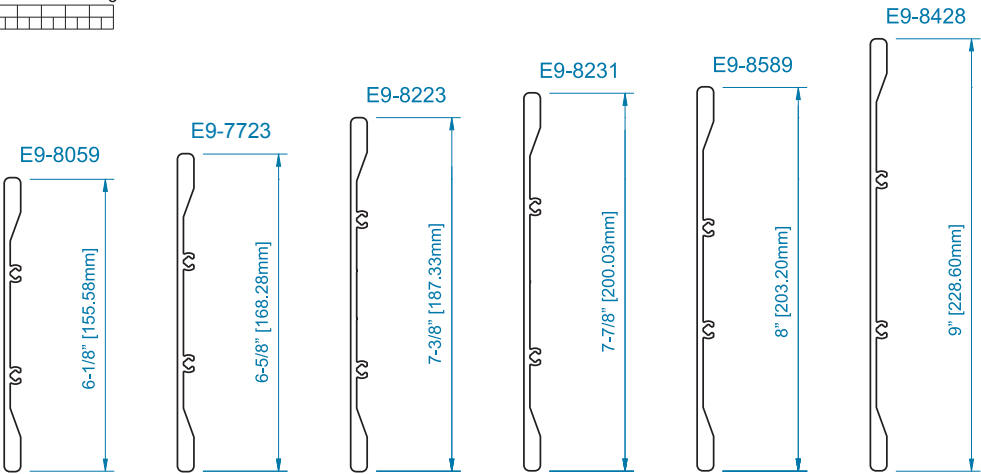

STANDARD SLAB EDGE COVERS


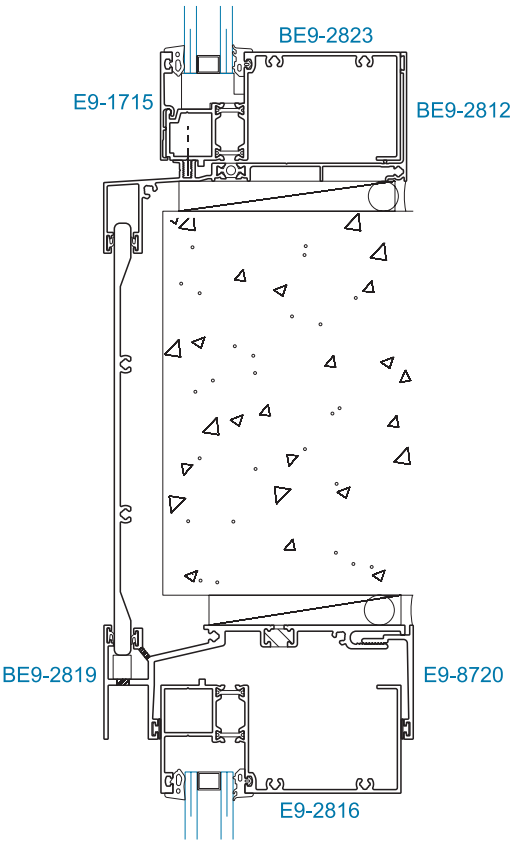


SLAB EDGE

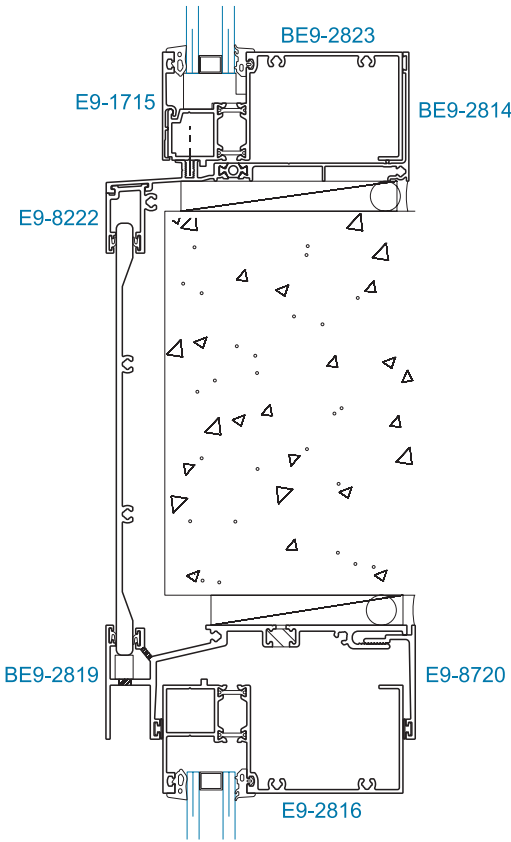


SLAB EDGE
OPTIONAL


SSG FRAMING MEMBERS

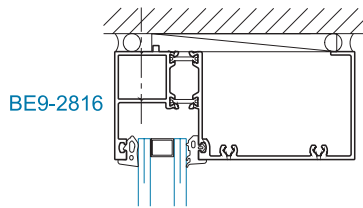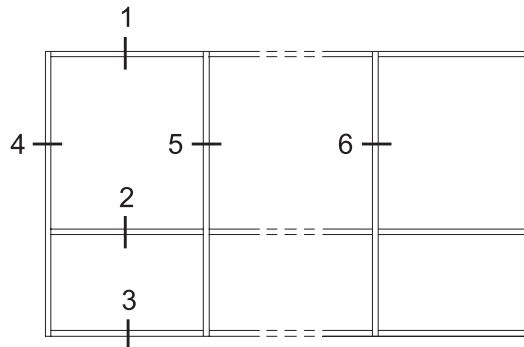


**SECTION 1
HEAD**

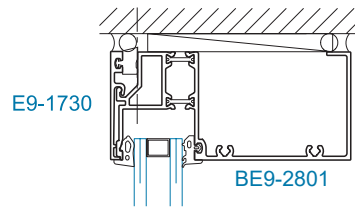


**SECTION 1
ALTERNATE HEAD**
(For runs longer than 24'-0")




**SECTION 2
HORIZONTAL**




**SECTION 4
JAMB**




**SECTION 5
VERTICAL**



**SECTION 5A
EXPANSION MULLION**

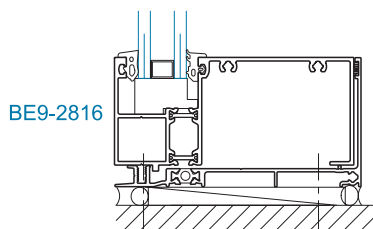


**SECTION 3
SILL**

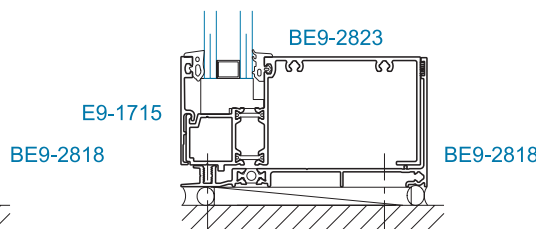


**SECTION 3
ALTERNATE SILL**
(For runs longer than 24'-0")

SCALE: 1/4 SIZE
0 3 6

SSG FRAMING MEMBERS

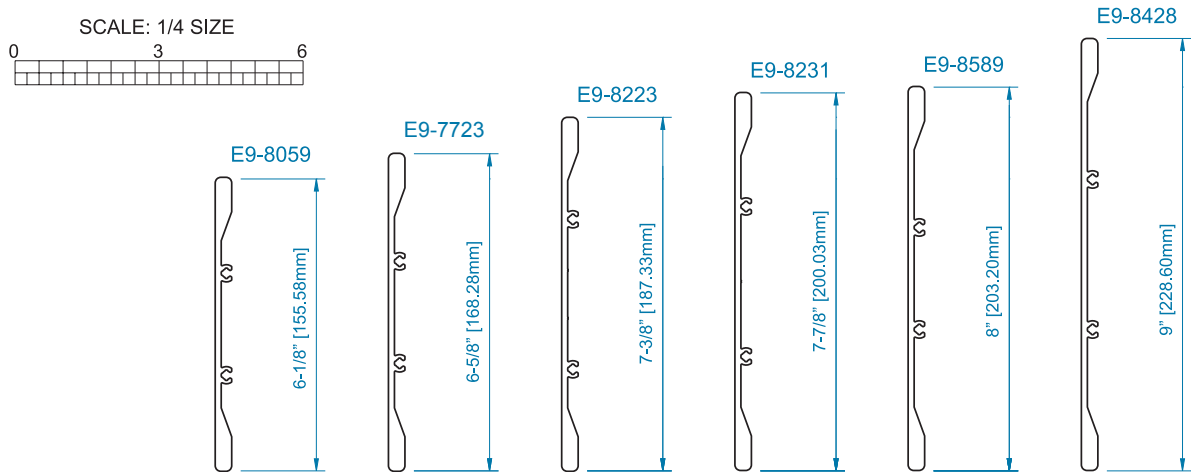




STANDARD SLAB EDGE COVERS

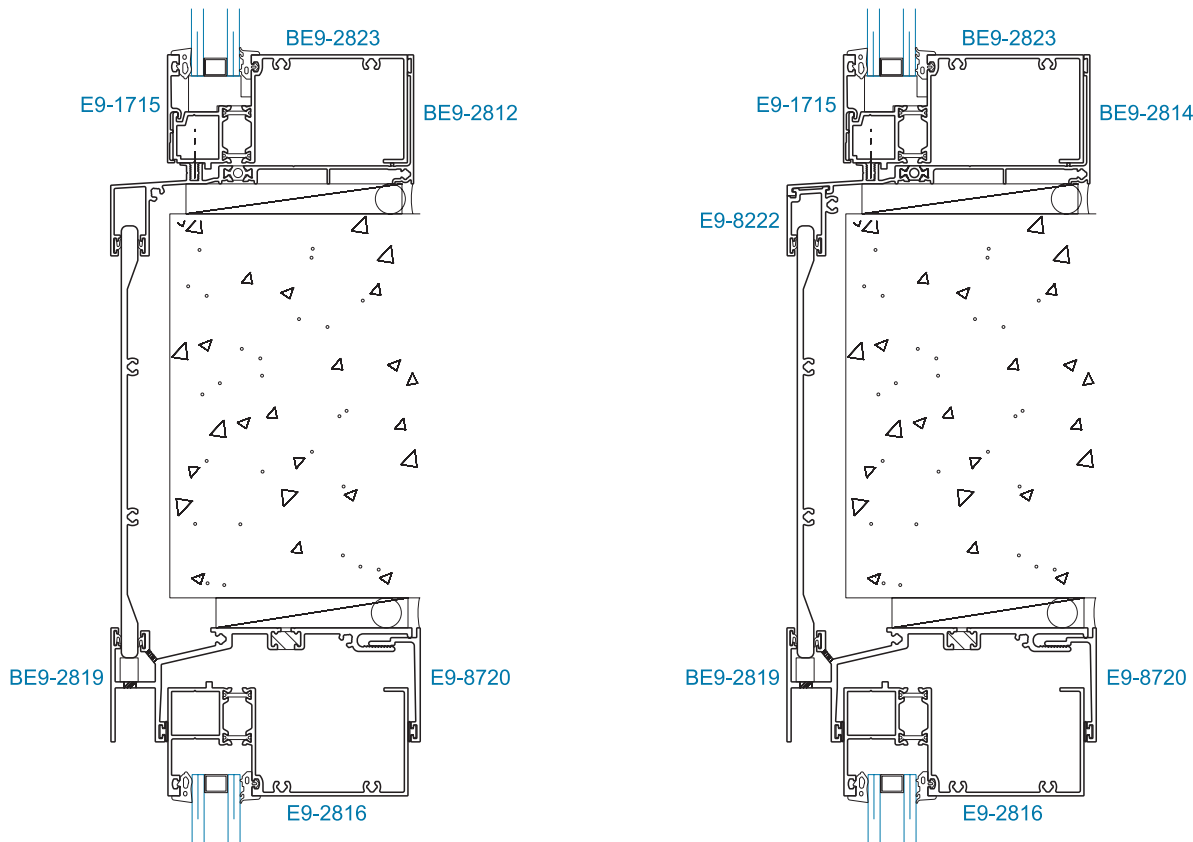


SLAB EDGE

SLAB EDGE
OPTIONAL


CORNER FRAMING MEMBERS

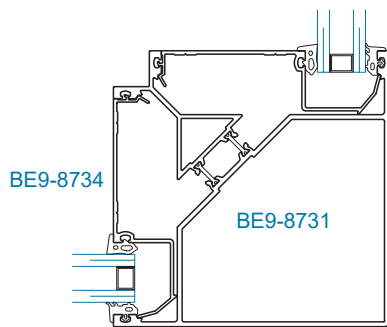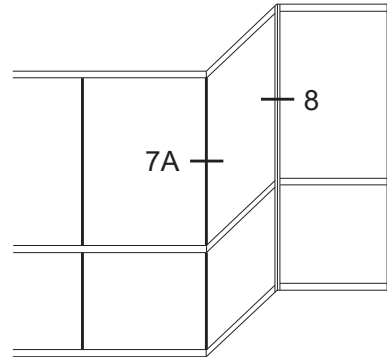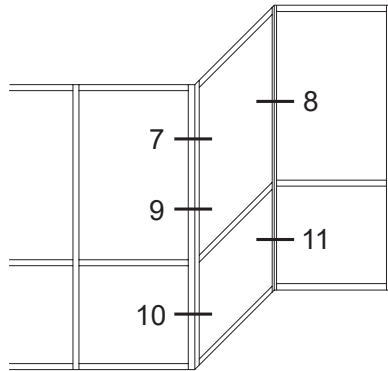


SECTION 7
90° OUTSIDE CORNER




SECTION 8
90° INSIDE CORNER

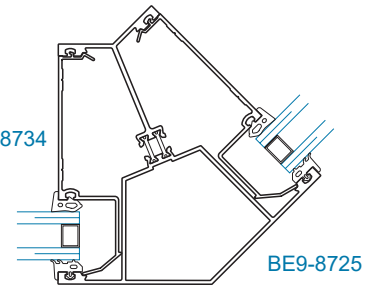


SECTION 9
135° OUTSIDE CORNER

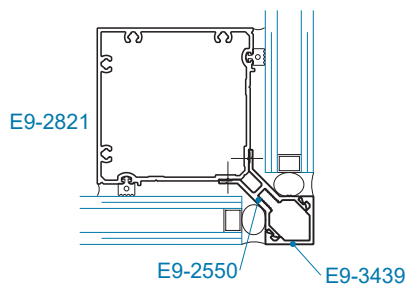


SECTION 7A
90° OUTSIDE CORNER




SECTION 10
3°-20° OUTSIDE
HINGED MULLION




DOOR FRAMING MEMBERS

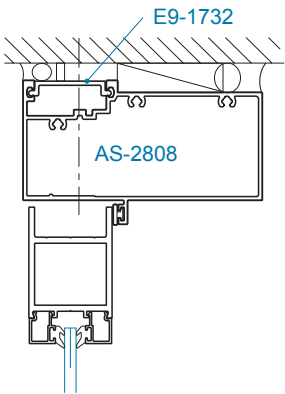


SECTION 12
DOOR HEAD

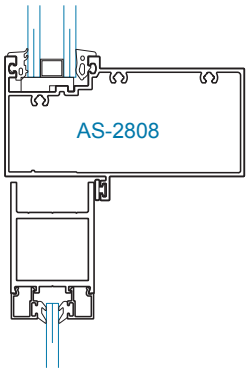




SECTION 12A
SINGLE ACTING
TRANSOM BAR

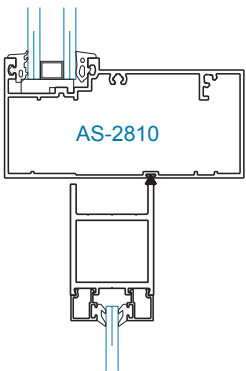


SECTION 12A
DOUBLE ACTING
TRANSOM BAR

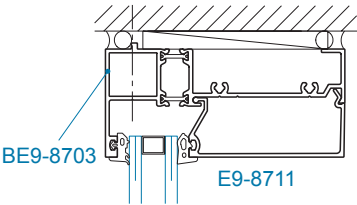


SECTION 17
HEAD

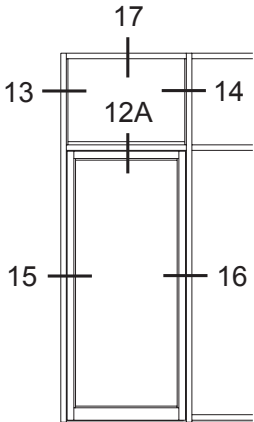

SECTION 13
JAMB @ TRANSOM
w/o SIDELITE




SECTION 14
JAMB @ TRANSOM
w/ SIDELITE

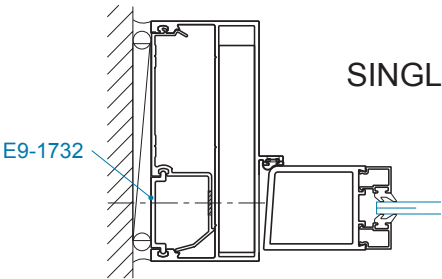


SECTION 15
DOOR JAMB
w/o SIDELITE

SINGLE ACTING

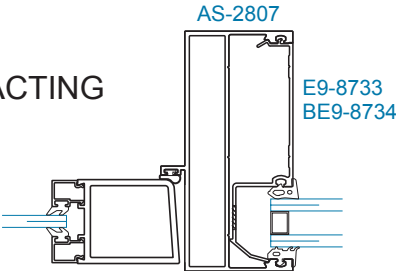


SECTION 16
DOOR JAMB
w/ SIDELITE

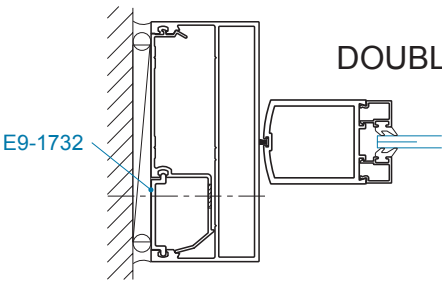


SECTION 15
DOOR JAMB
w/o SIDELITE

DOUBLE ACTING

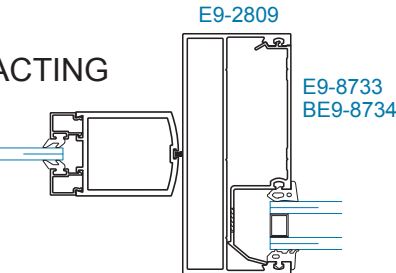


SECTION 16
DOOR JAMB
w/ SIDELITE


SCALE: 1/4 SIZE





THERMAL DOOR FRAMING MEMBERS

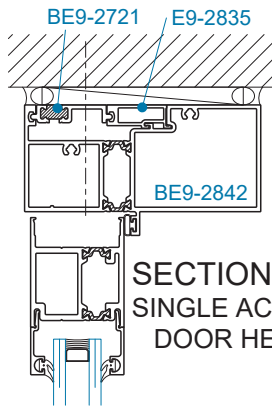


SECTION 12T
SINGLE ACTING
DOOR HEAD




SECTION 17
HEAD

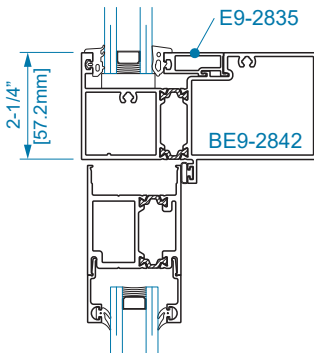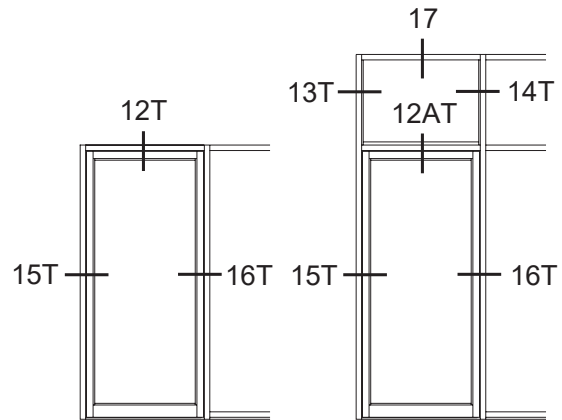


SECTION 12AT
SINGLE ACTING
TRANSOM BAR




SECTION 13T
JAMB @ TRANSOM
w/o SIDELTE

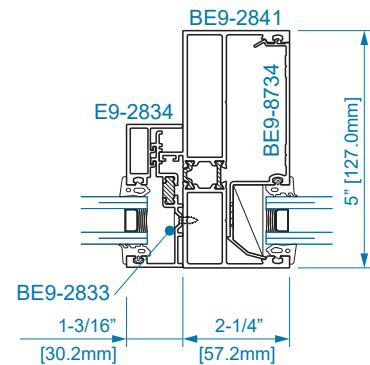


SECTION 14T
JAMB @ TRANSOM
w/ SIDELTE

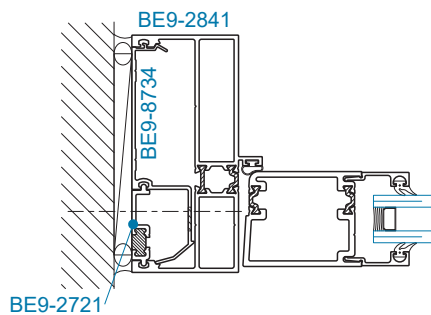

SECTION 15T
DOOR JAMB
w/o SIDELTE

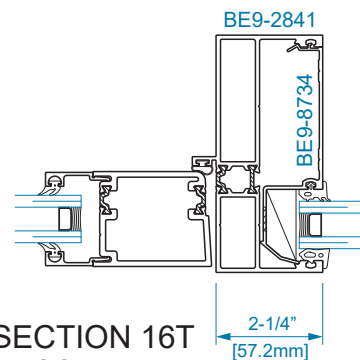

SECTION 16T
DOOR JAMB
w/ SIDELTE



WIND LOAD CHARTS

DEFLECTION CRITERIA: AAMA TIR-A11 - L/175 or









L/240 + 1/4" (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)

CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN 3/4" (19.1mm)


ALLOWABLE WIND LOAD STRESS

YKK AP tested standard. Contact YKK AP for more information.



These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span. For other applications, please contact YKK AP engineers at 1-866-955-2732.

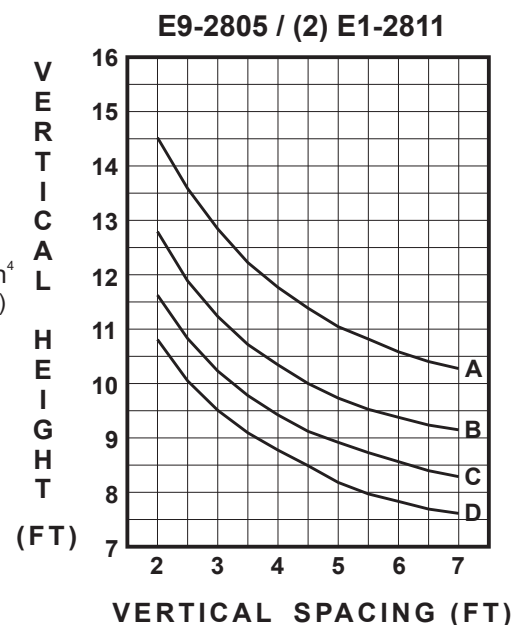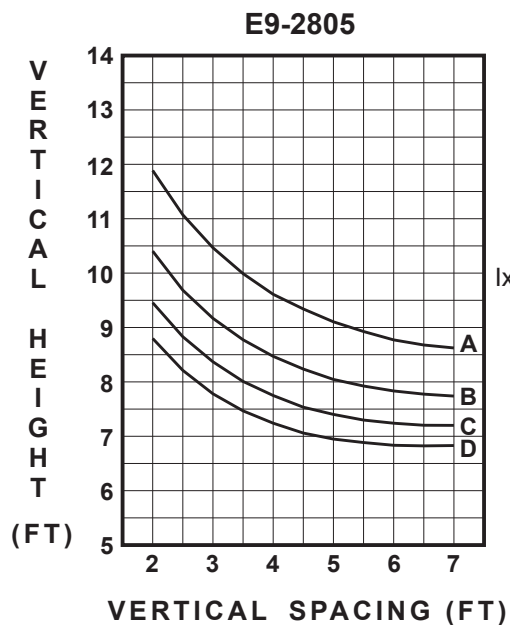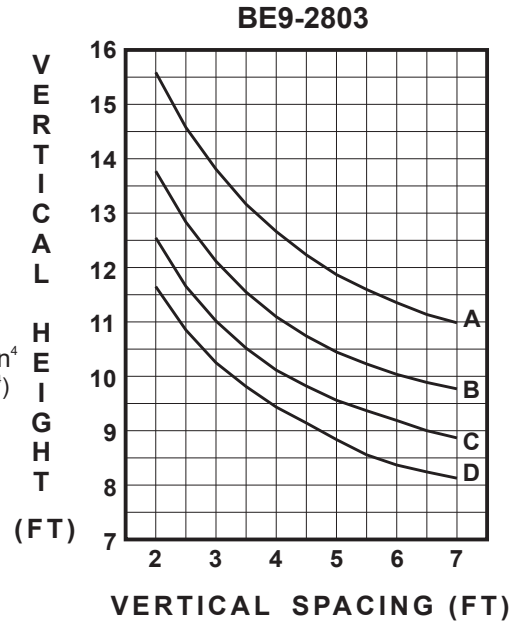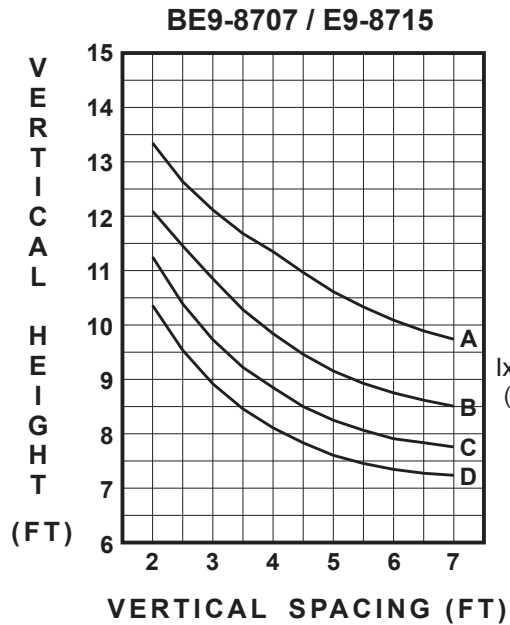


DEAD LOAD CHARTS



BE9-8728

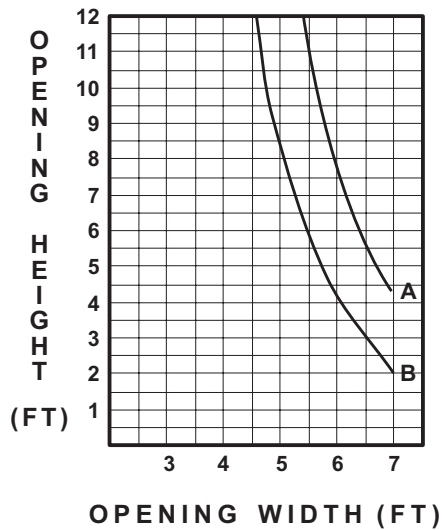

BE9-8704 / E9-8711

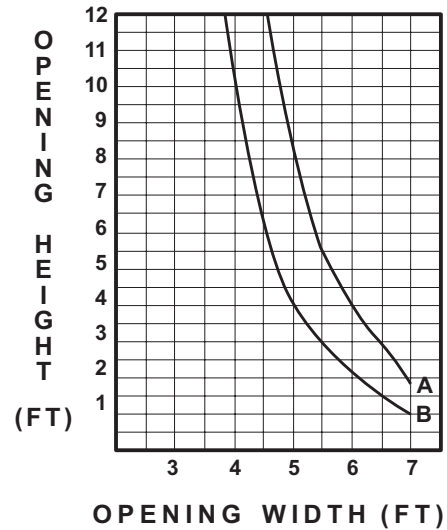

A = SETTING BLOCKS AT 1/8 POINT LOCATIONS

B = SETTING BLOCKS AT 1/4 POINT LOCATIONS

Note: Dead Load requirements are based upon a maximum deflection of 1/8" (3.2mm) at the center of the horizontal.