

TABLE OF CONTENTS

YCW 750 IG INSIDE GLAZED CURTAIN WALL SYSTEM
FOR 1/4" AND 1" GLAZING

PICTORIAL VIEW Page 2

TYPICAL SPLICE CONDITION Page 3

MULLION END ANCHORS Page 4

FRAMING MEMBERS Page 5 to 8
FOR 1/4" GLAZING (1/4 SIZE)

CORNER FRAMING MEMBERS Page 9 to 10
FOR 1/4" GLAZING (1/4 SIZE)

FRAMING MEMBERS Page 11 to 14
FOR 1" GLAZING (1/4 SIZE)


CORNER FRAMING MEMBERS Page 15 to 16
FOR 1" GLAZING (1/4 SIZE)

DOOR FRAMING MEMBERS (1/4 SIZE) Page 17


WIND LOAD CHARTS Page 18

*The latest installation instructions for this product are available at www.ykkap.com.


**YCW 750 IG INSIDE GLAZED
CURTAIN WALL SYSTEM**

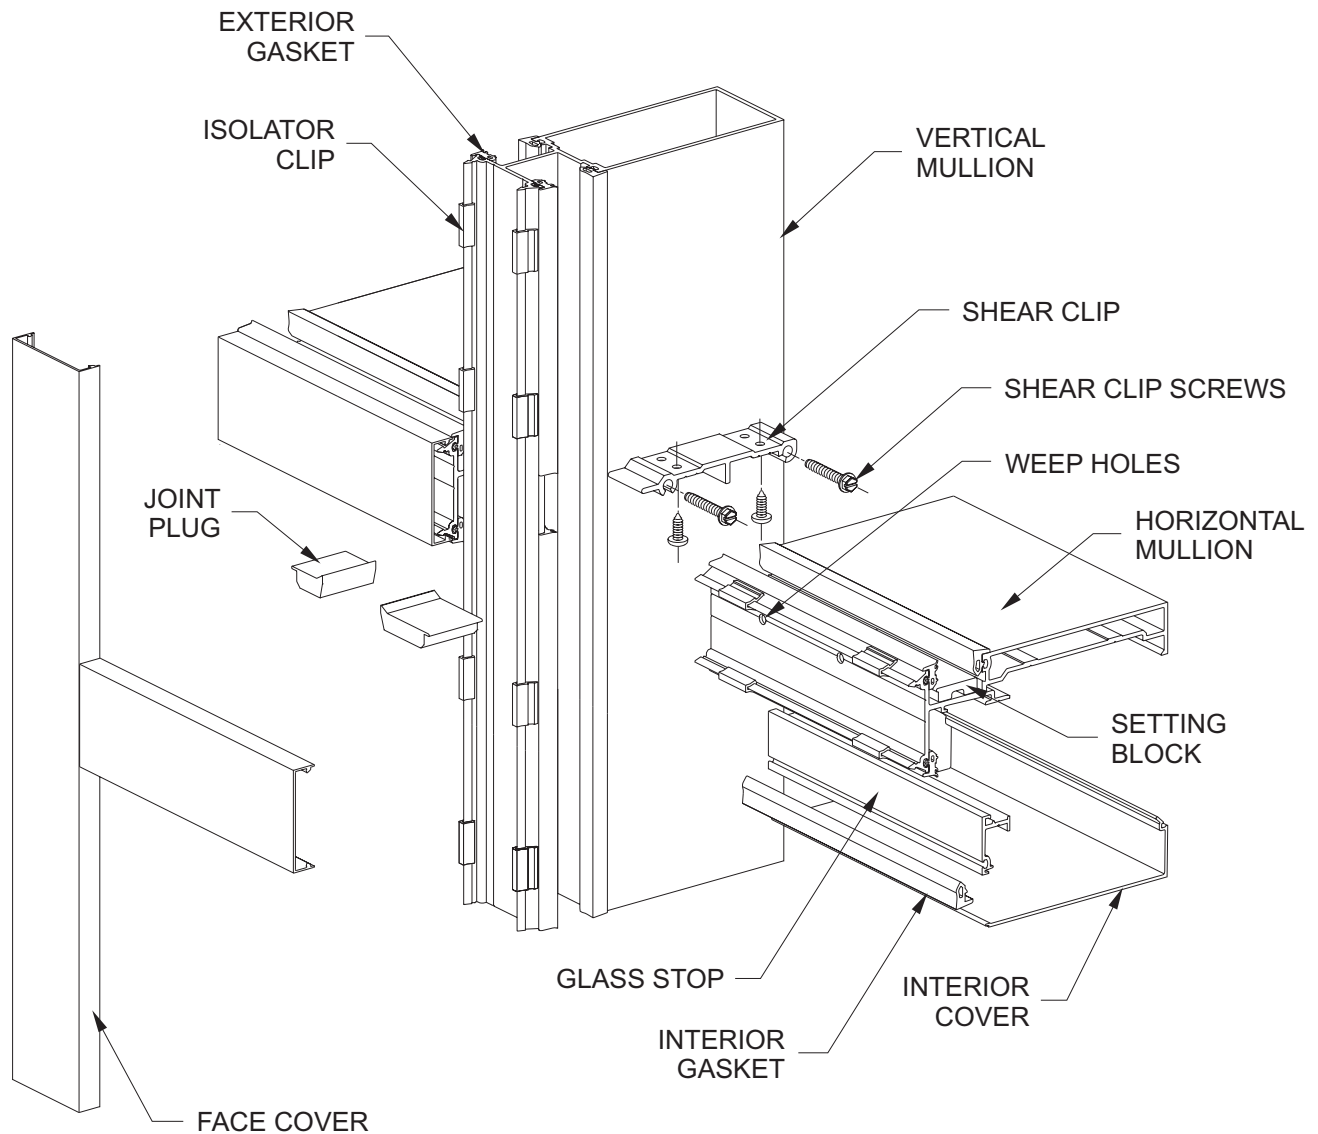


TYPICAL SPLICE CONDITION

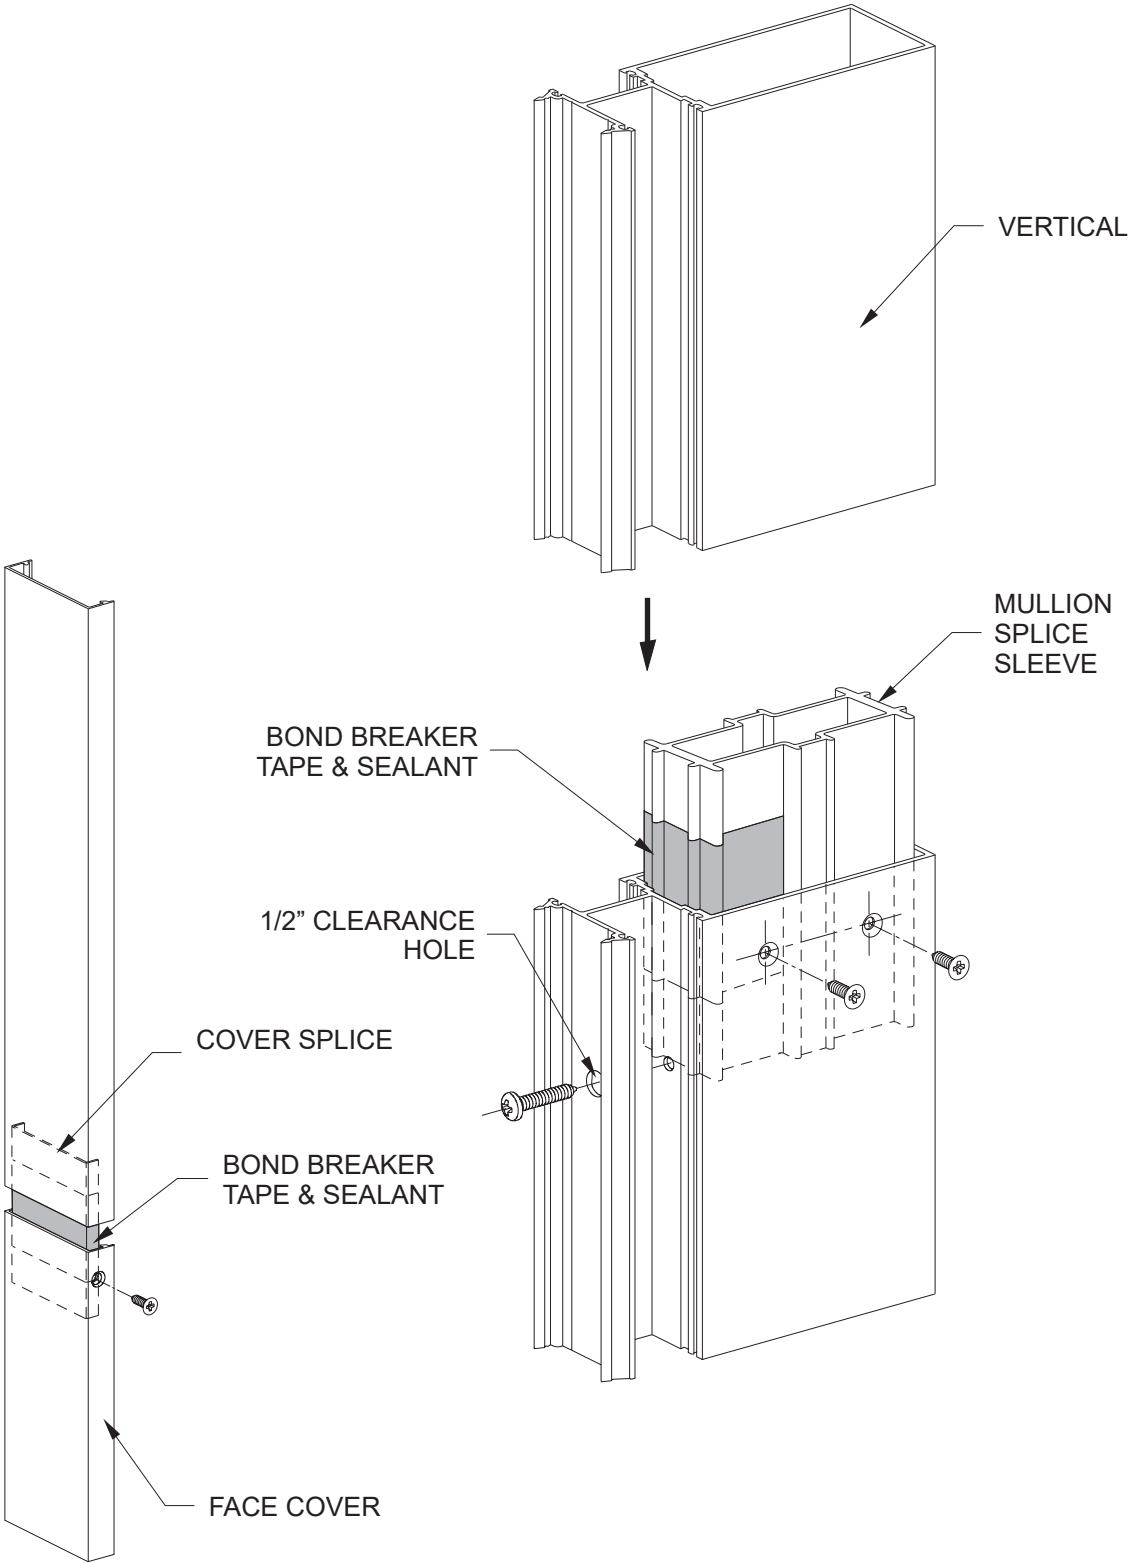


VERTICAL MULLION END “T” ANCHOR

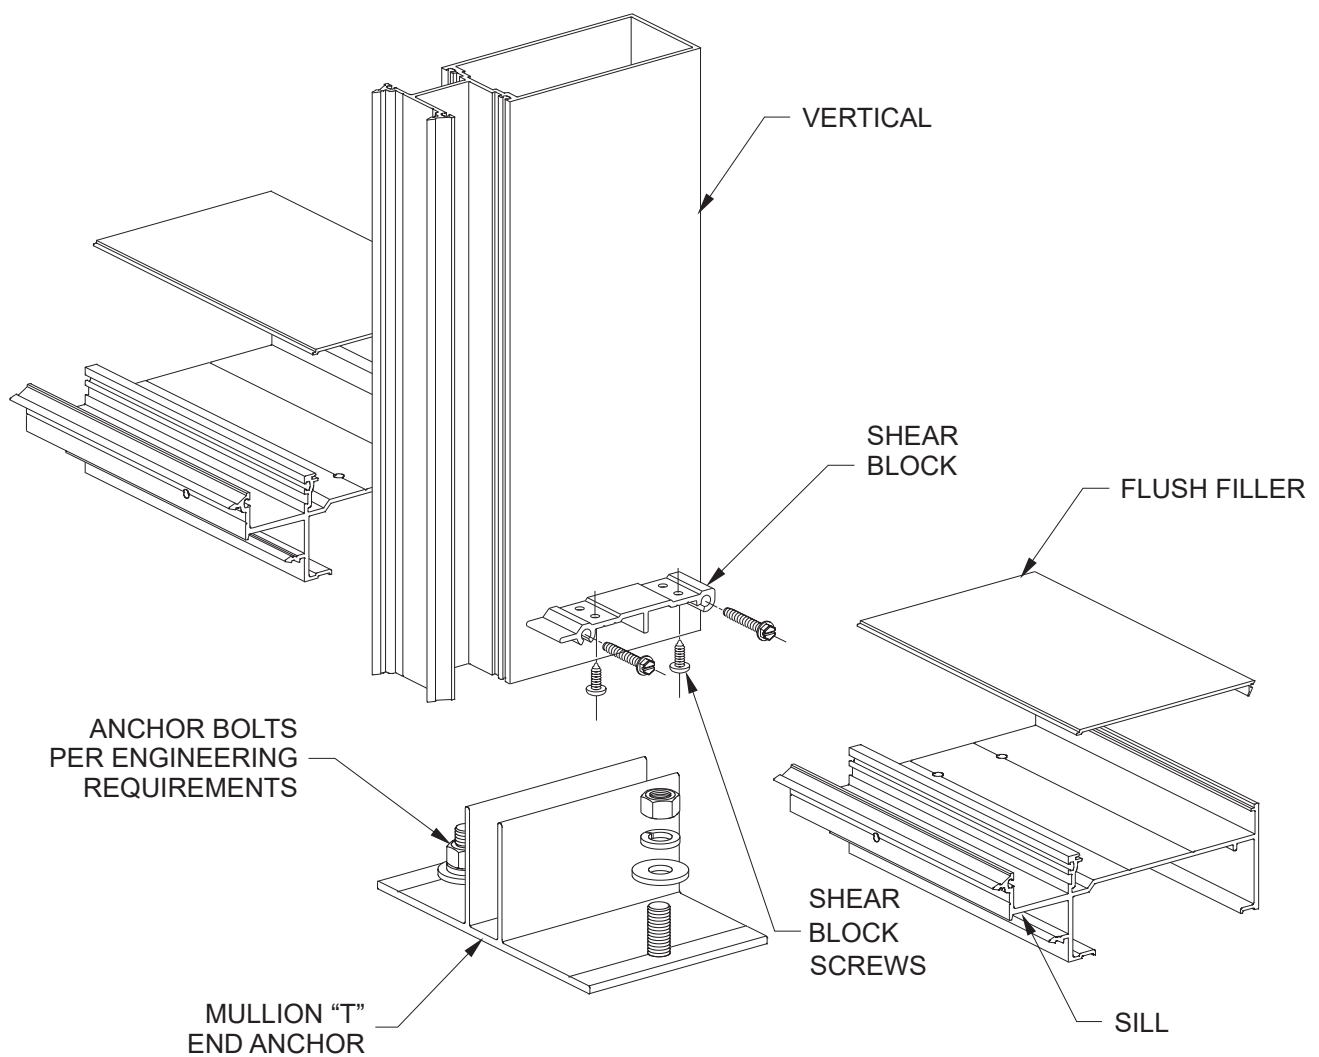


FRAMING MEMBERS FOR 1/4" GLAZING
STANDARD INSIDE GLAZING

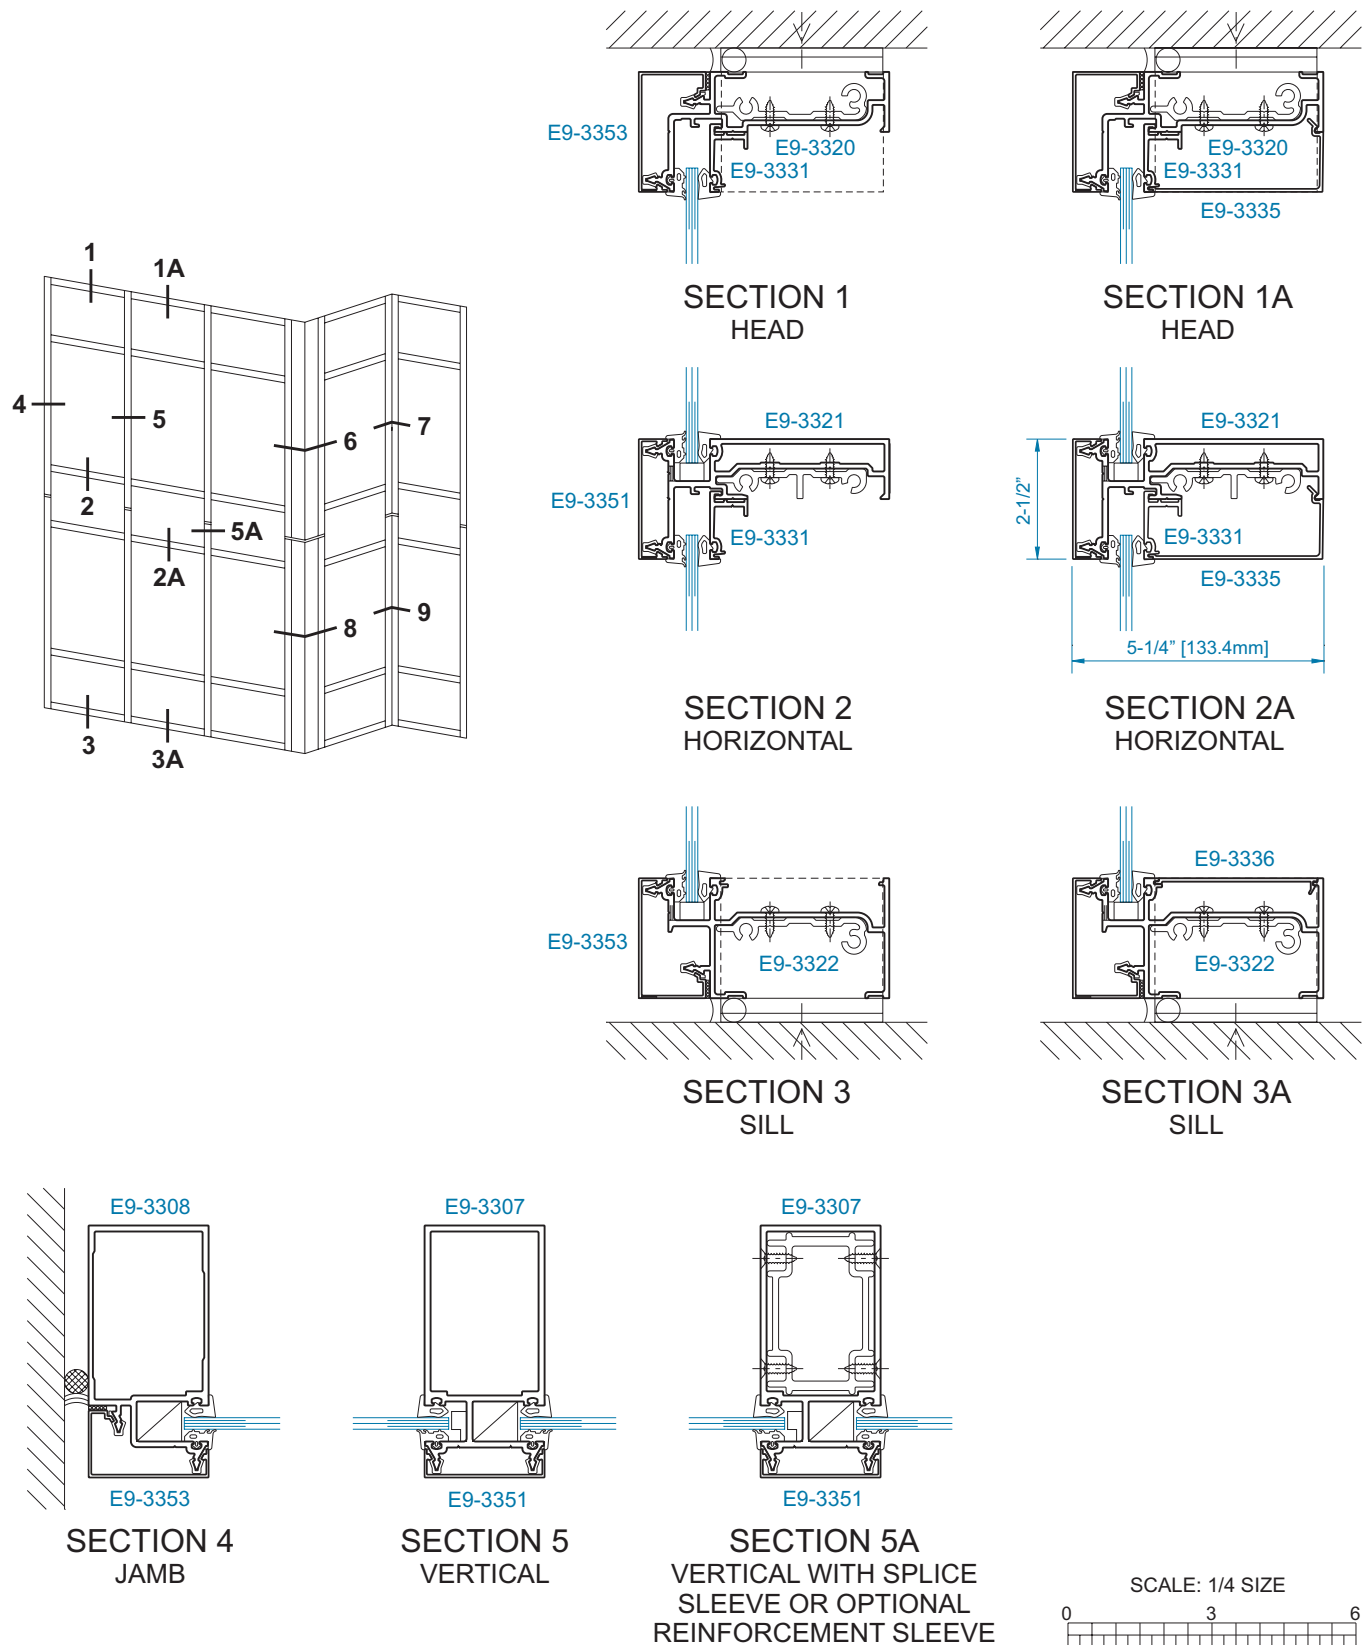


**FRAMING MEMBERS FOR 1/4" GLAZING
STANDARD INSIDE GLAZING**

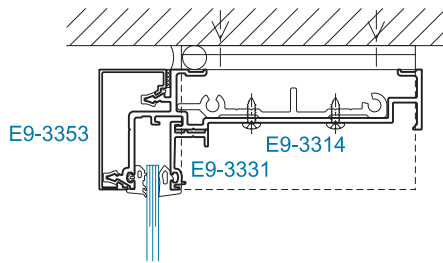


**SECTION 1
HEAD**

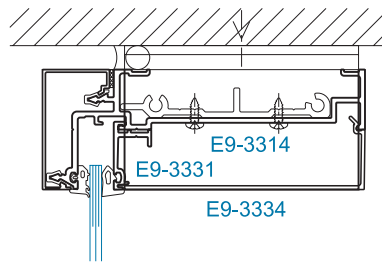



**SECTION 1A
HEAD**

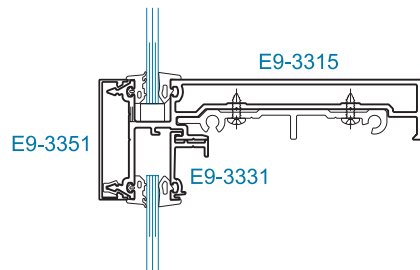


**SECTION 2
HORIZONTAL**

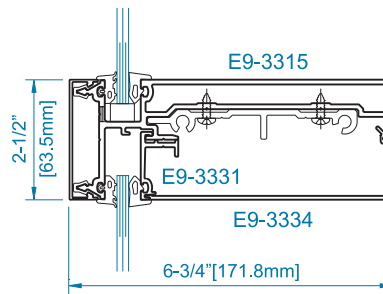


**SECTION 2A
HORIZONTAL**

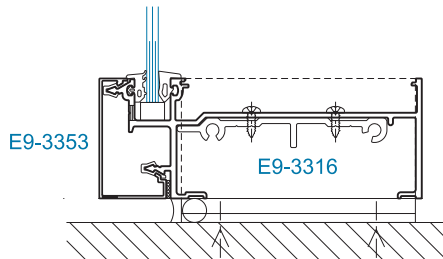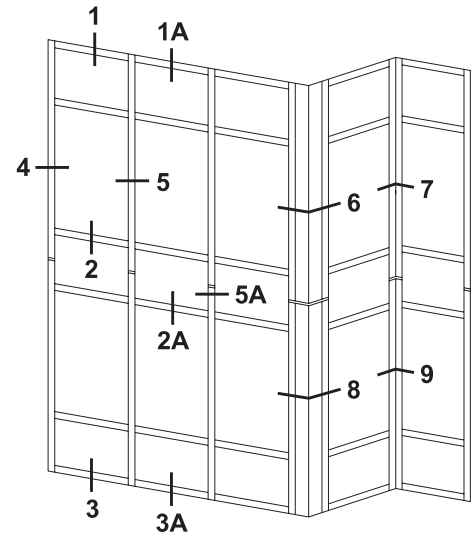


**SECTION 3
Sill**

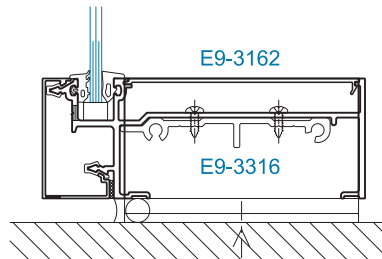


**SECTION 3A
Sill**

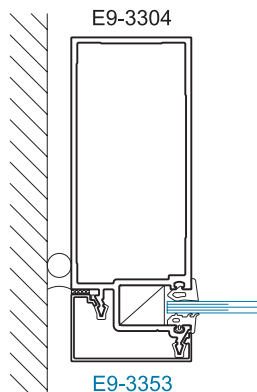

**SECTION 4
JAMB**

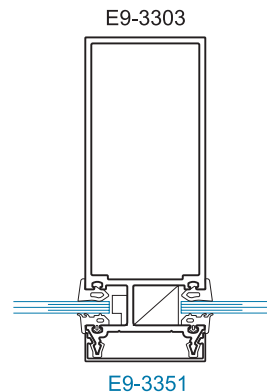

**SECTION 5
VERTICAL**











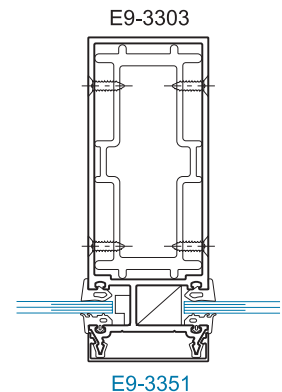


**SECTION 5A
VERTICAL WITH SPLICE
SLEEVE OR OPTIONAL
REINFORCEMENT SLEEVE**


SCALE: 1/4 SIZE




FRAMING MEMBERS FOR 1/4" GLAZING
OPTIONAL OUTSIDE GLAZING

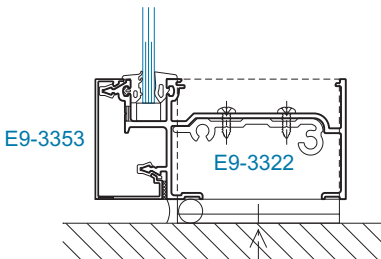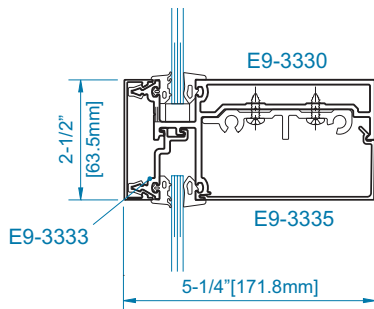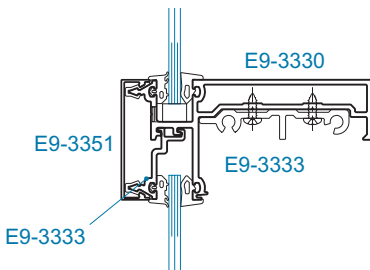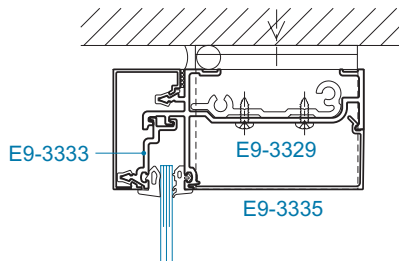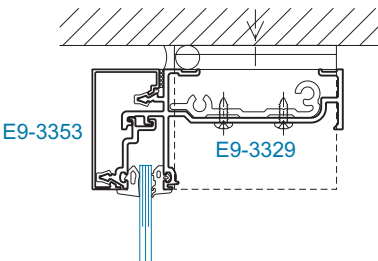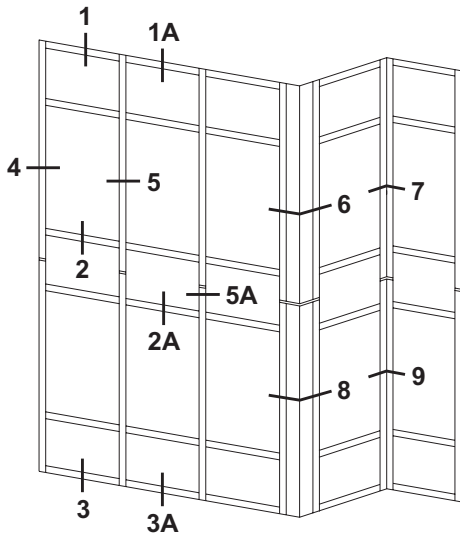


**FRAMING MEMBERS FOR 1/4" GLAZING
OPTIONAL OUTSIDE GLAZING**

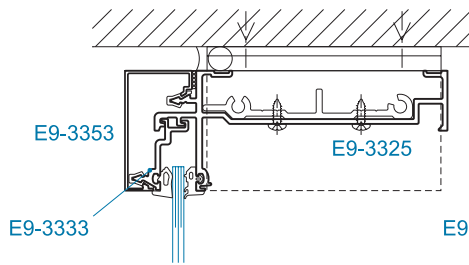


**SECTION 1
HEAD**

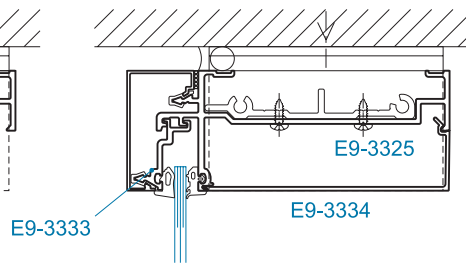



**SECTION 1A
HEAD**

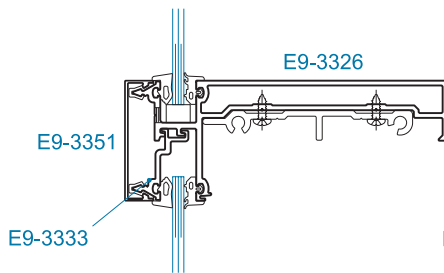


**SECTION 2
HORIZONTAL**

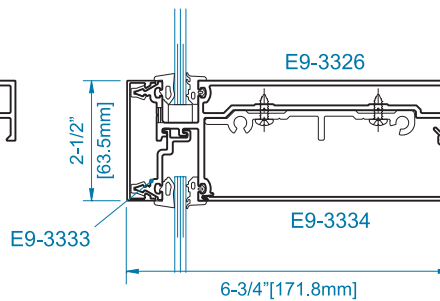


**SECTION 2A
HORIZONTAL**

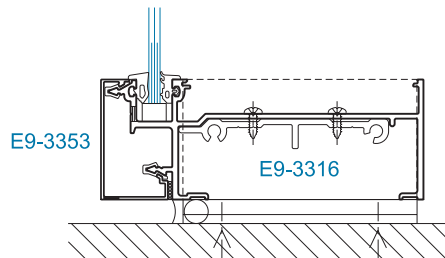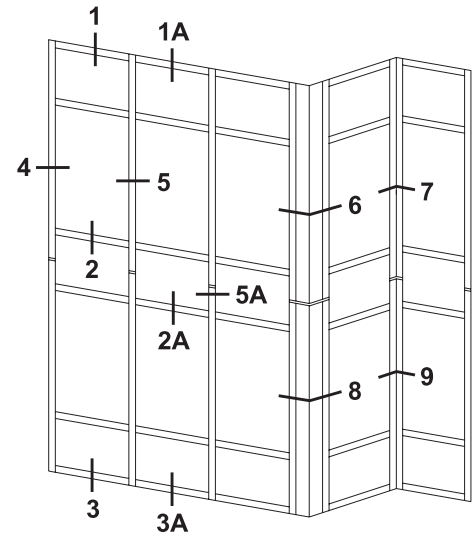


**SECTION 3
SILL**

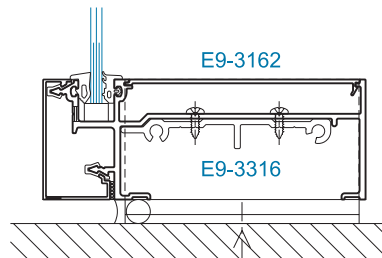


**SECTION 3A
SILL**

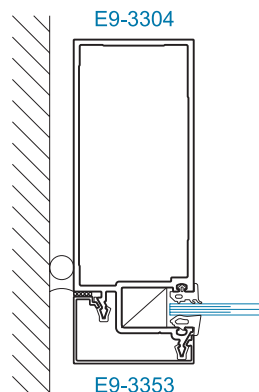


**SECTION 4
Jamb**

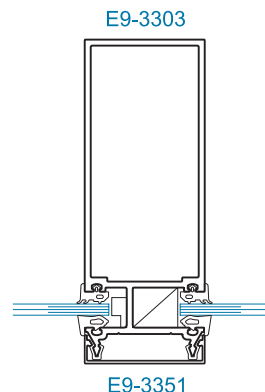



**SECTION 5
VERTICAL**

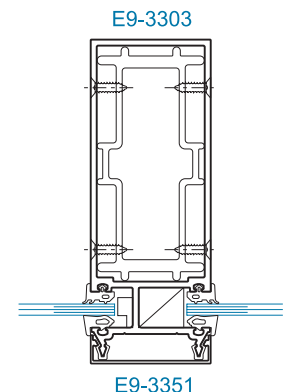


**SECTION 5A
VERTICAL WITH SPLICE
SLEEVE OR OPTIONAL
REINFORCEMENT SLEEVE**




CORNER FRAMING MEMBERS FOR 1/4" GLAZING

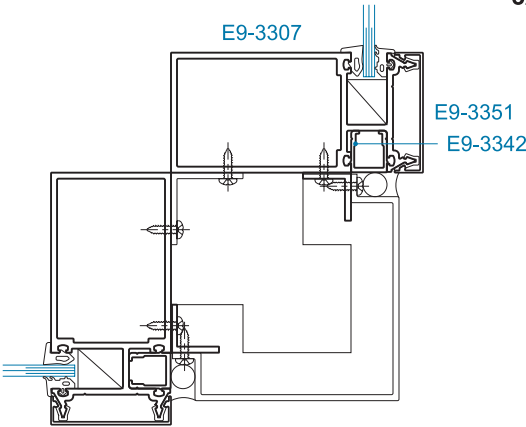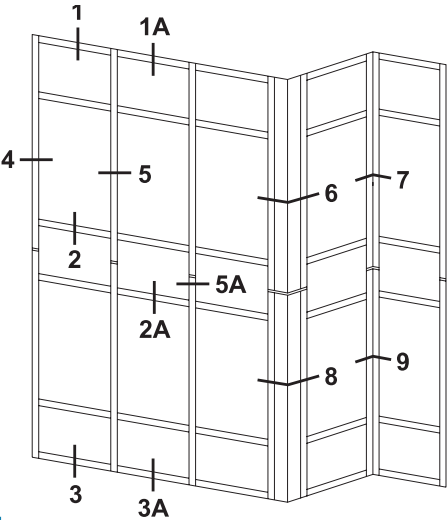


SECTION 6
90° OUTSIDE CORNER

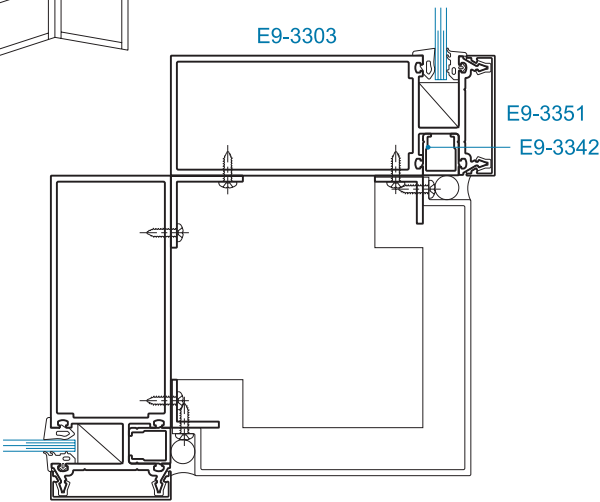


SECTION 6
90° OUTSIDE CORNER

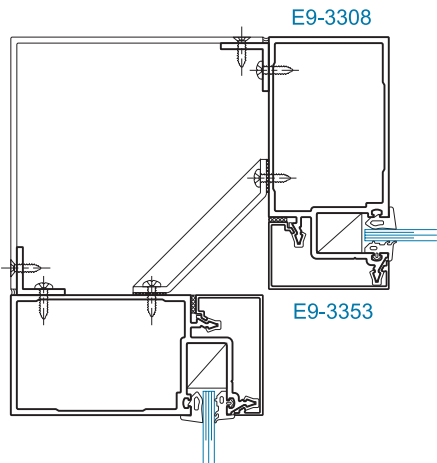


SECTION 7
90° INSIDE CORNER

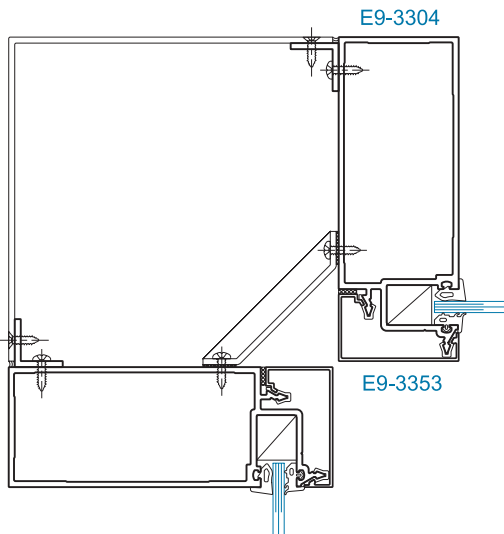


SECTION 7
90° INSIDE CORNER




CORNER FRAMING MEMBERS FOR 1/4" GLAZING

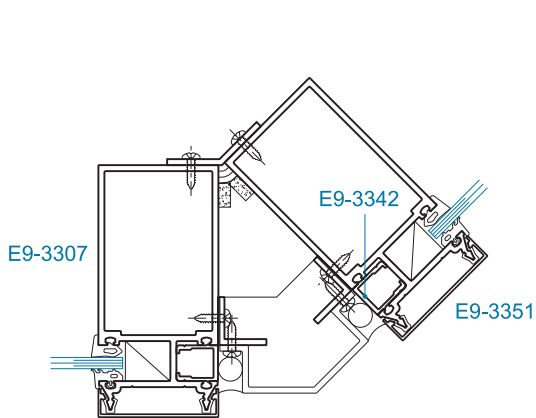


SECTION 8
135° OUTSIDE CORNER

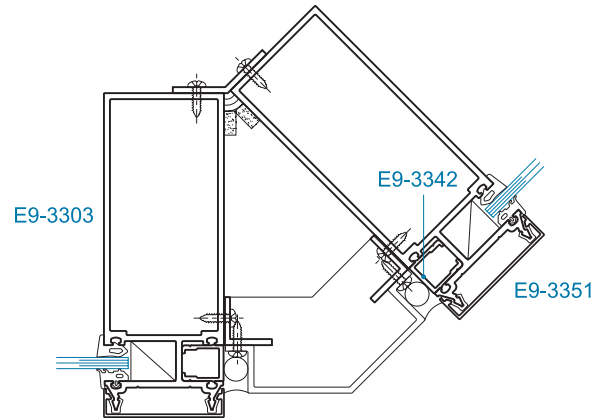


SECTION 8
135° OUTSIDE CORNER

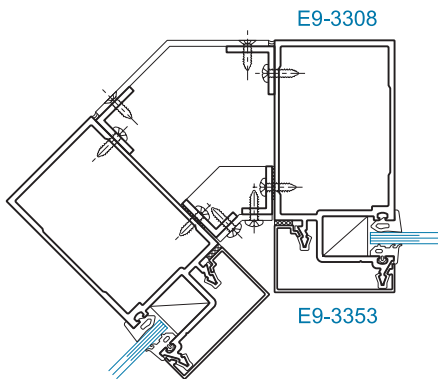

SECTION 9
135° INSIDE CORNER











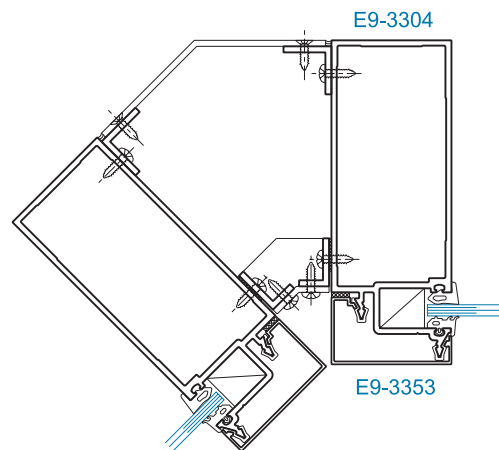


SECTION 9
135° INSIDE CORNER

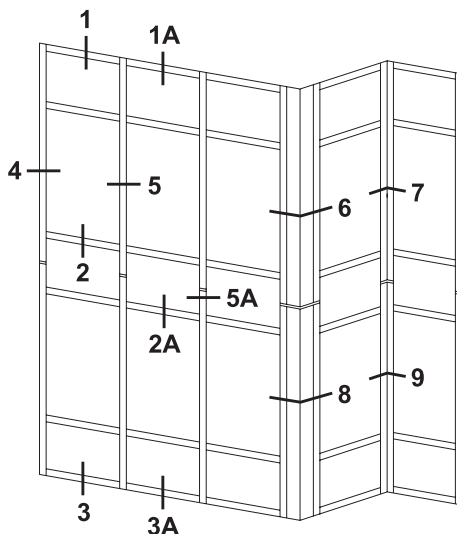


SCALE: 1/4 SIZE
0 3 6


FRAMING MEMBERS FOR 1" GLAZING
STANDARD INSIDE GLAZING

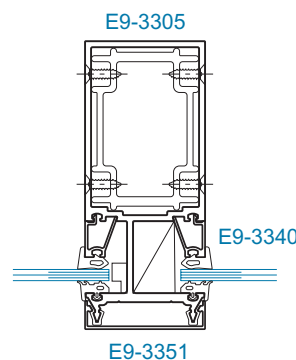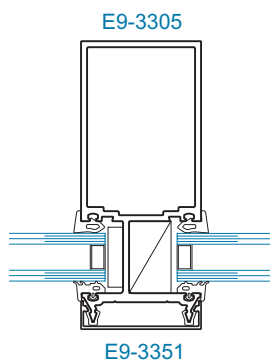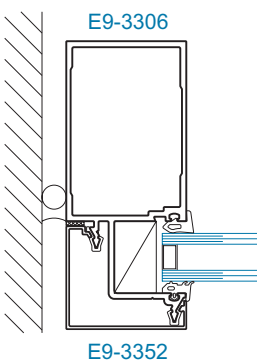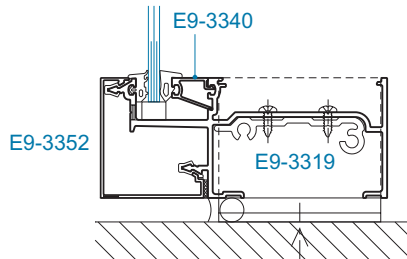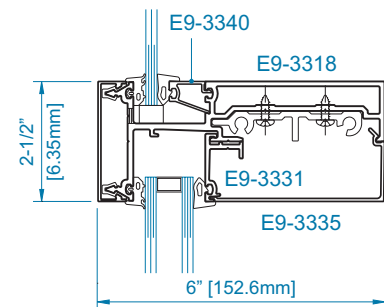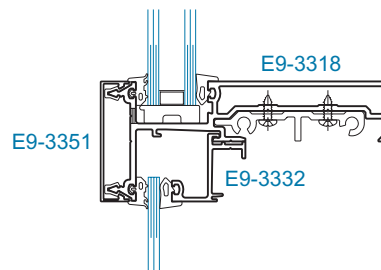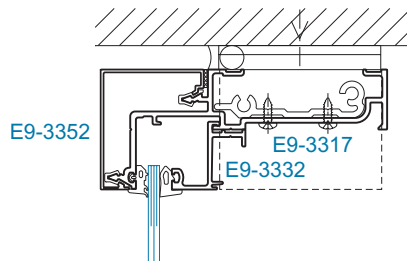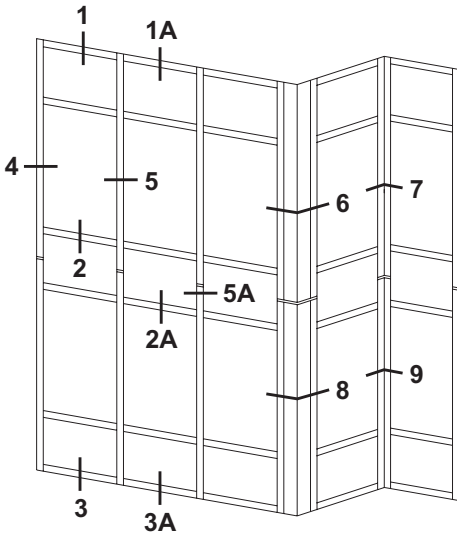


**FRAMING MEMBERS FOR 1" GLAZING
STANDARD INSIDE GLAZING**

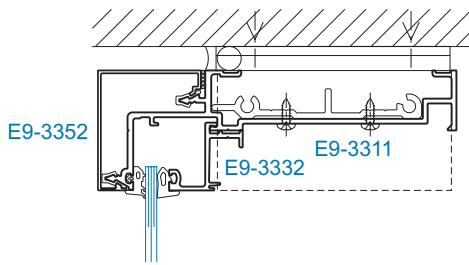


**SECTION 1
HEAD**

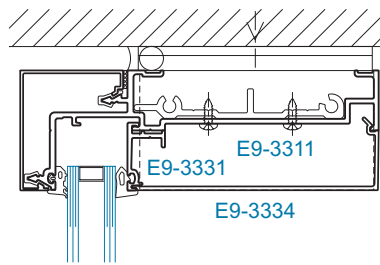


**SECTION 1A
HEAD**

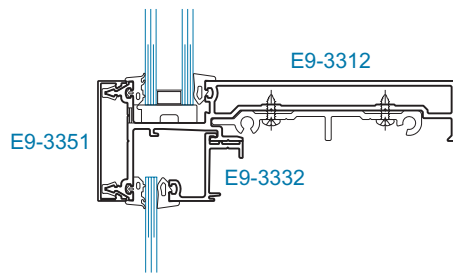


**SECTION 2
HORIZONTAL**

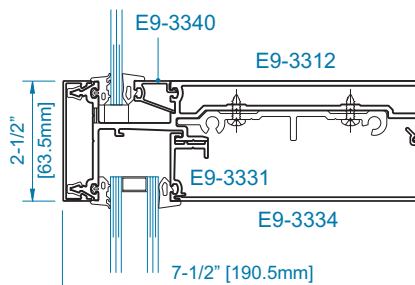



**SECTION 2A
HORIZONTAL**

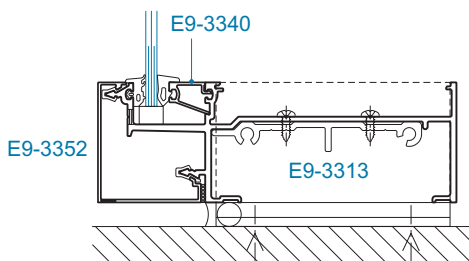


**SECTION 3
SILL**

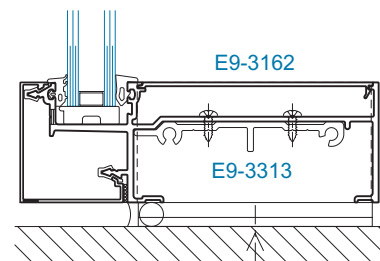


**SECTION 3A
SILL**

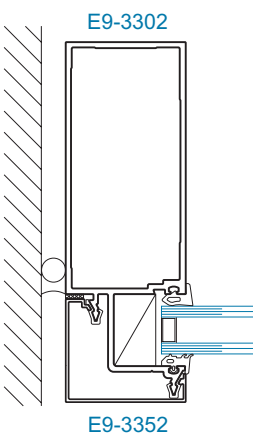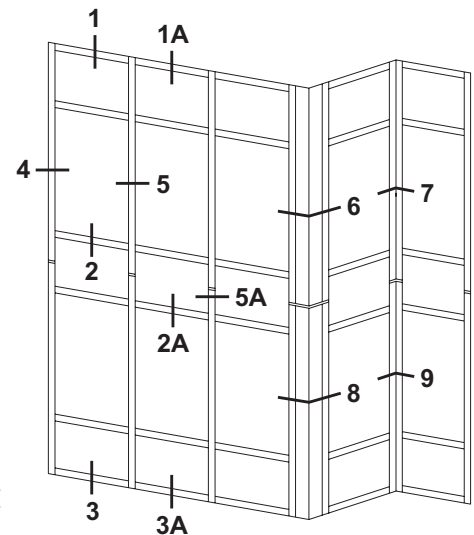

**SECTION 4
JAMB**

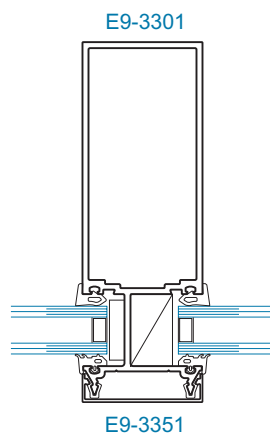


**SECTION 5
VERTICAL**

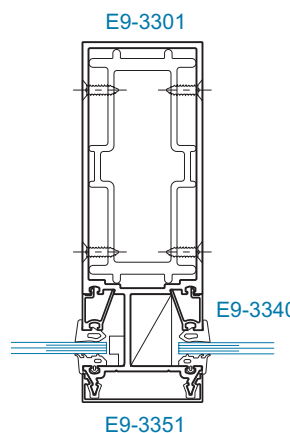


**SECTION 5A
VERTICAL WITH SPLICE
SLEEVE OR OPTIONAL
REINFORCEMENT SLEEVE**

SCALE: 1/4 SIZE
0 3 6


FRAMING MEMBERS FOR 1" GLAZING
OPTIONAL OUTSIDE GLAZING

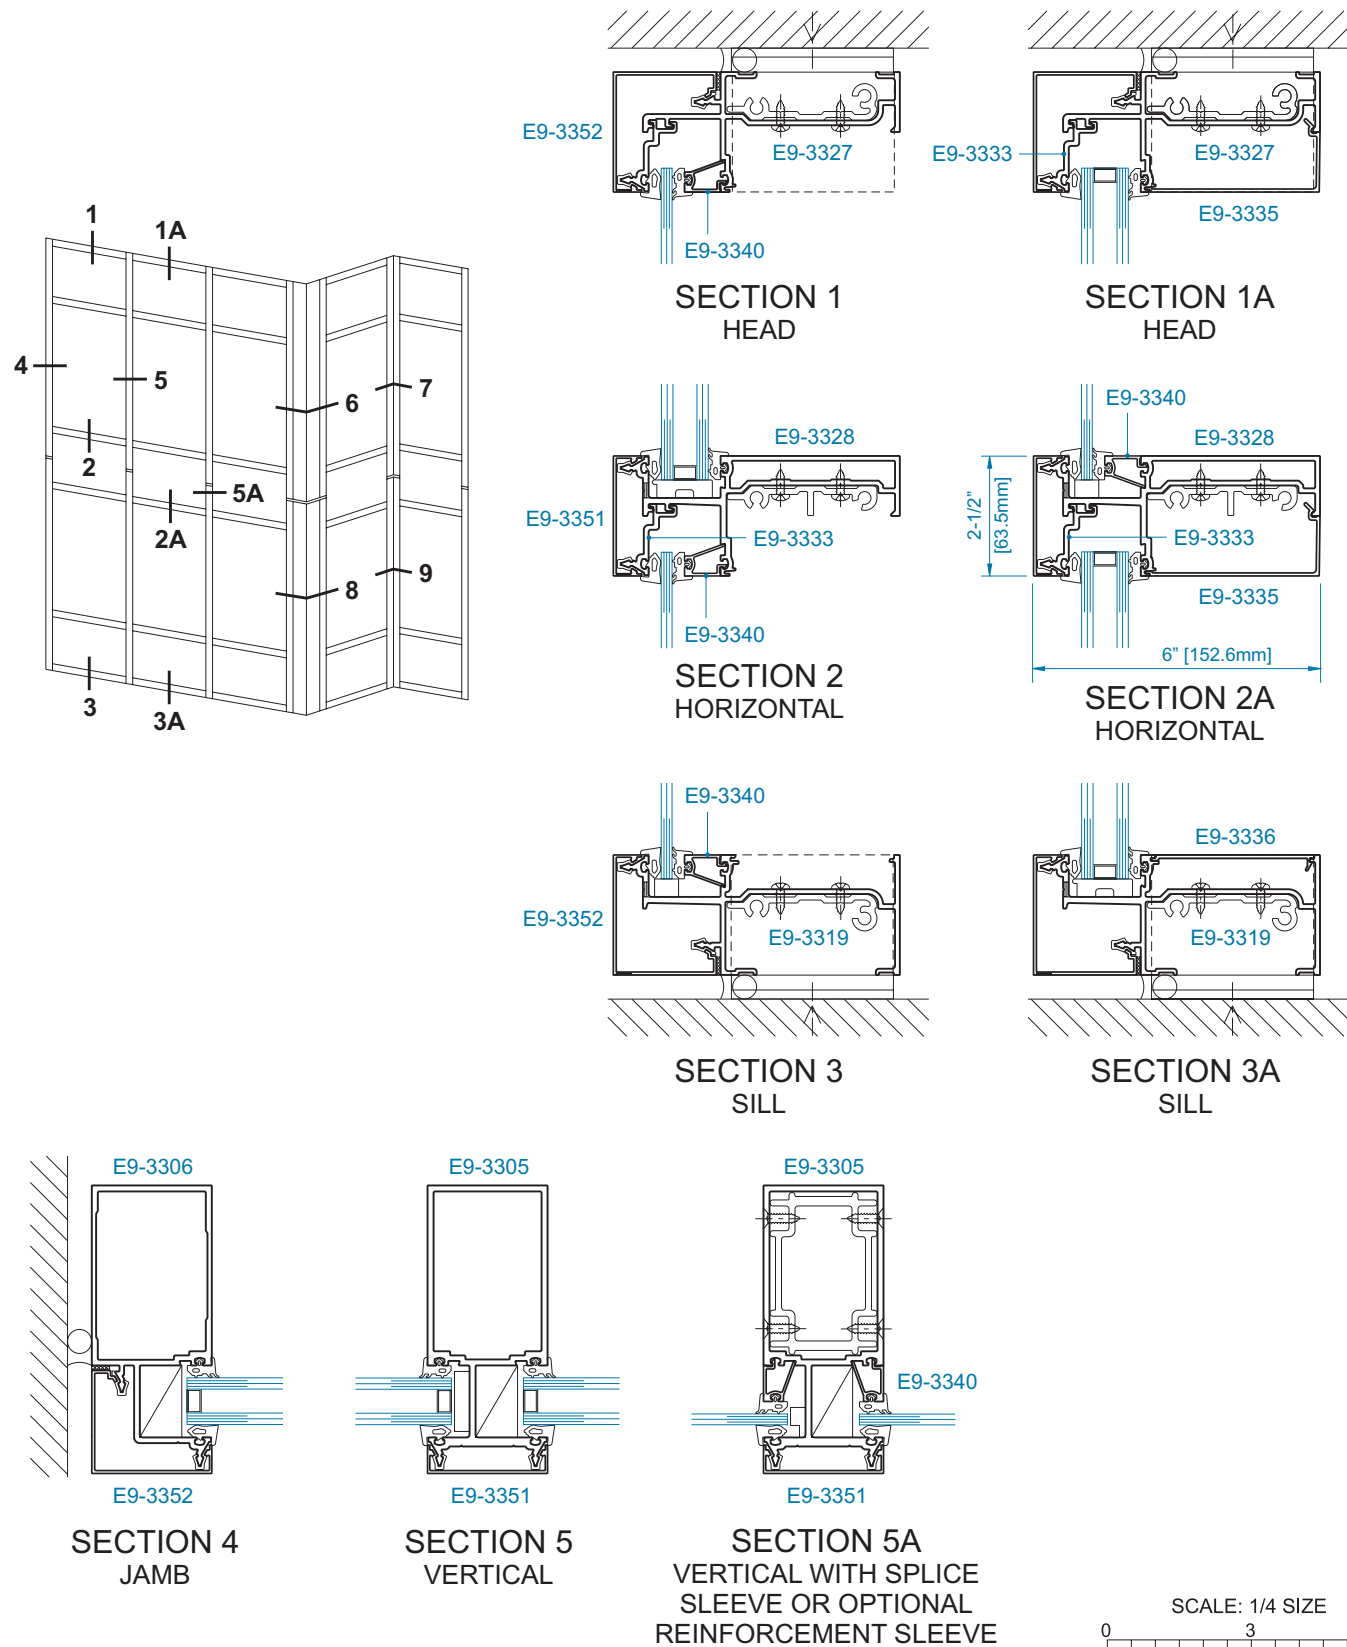


**FRAMING MEMBERS FOR 1" GLAZING
OPTIONAL OUTSIDE GLAZING**

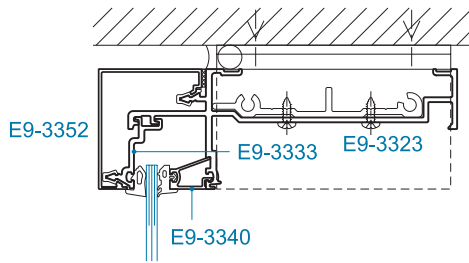


**SECTION 1
HEAD**

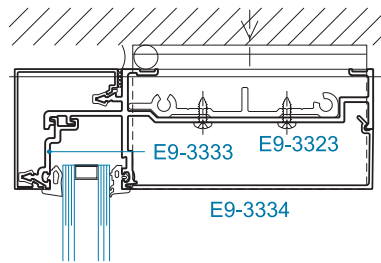



**SECTION 1A
HEAD**

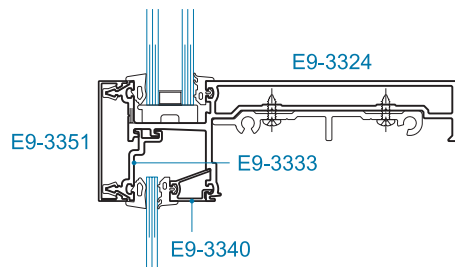


**SECTION 2
HORIZONTAL**

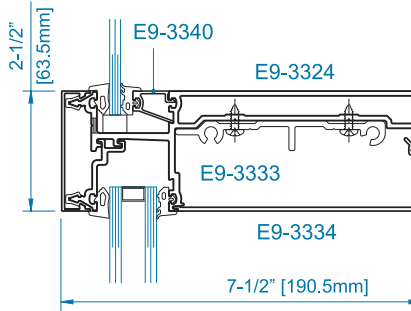


**SECTION 2A
HORIZONTAL**

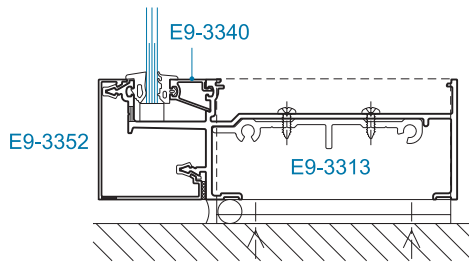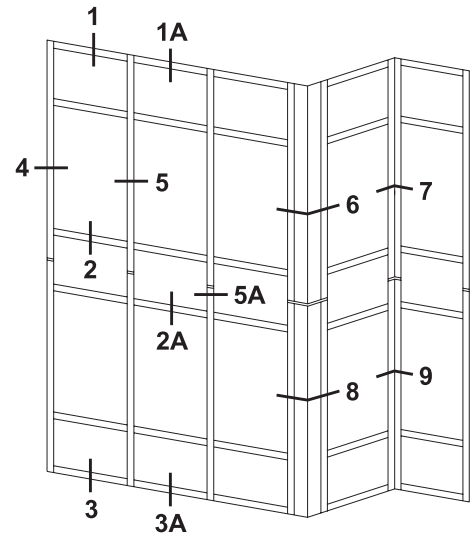


**SECTION 3
SILL**

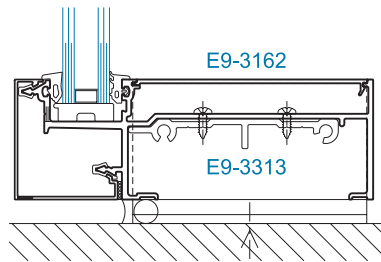


**SECTION 3A
SILL**

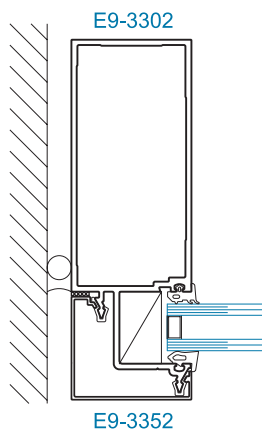

**SECTION 4
JAMB**

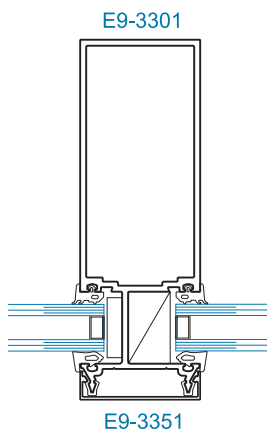


**SECTION 5
VERTICAL**


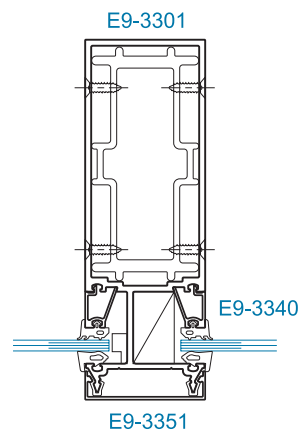


**SECTION 5A
VERTICAL WITH SPLICE
SLEEVE OR OPTIONAL**


SCALE: 1/4 SIZE





CORNER FRAMING MEMBERS FOR 1" GLAZING

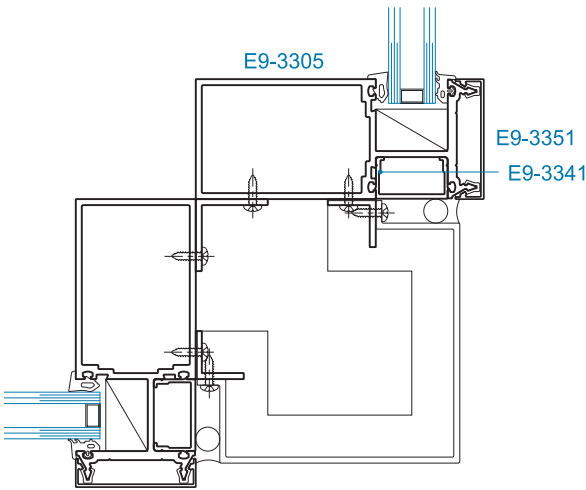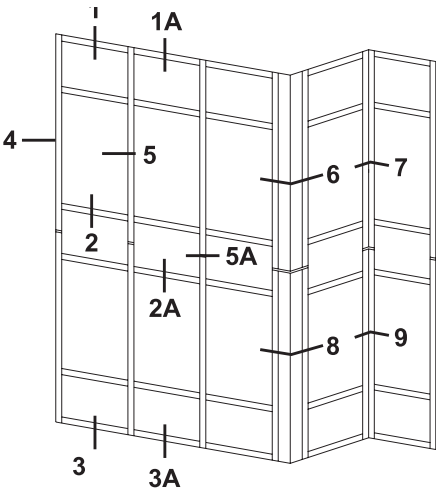


SECTION 6
90° OUTSIDE CORNER

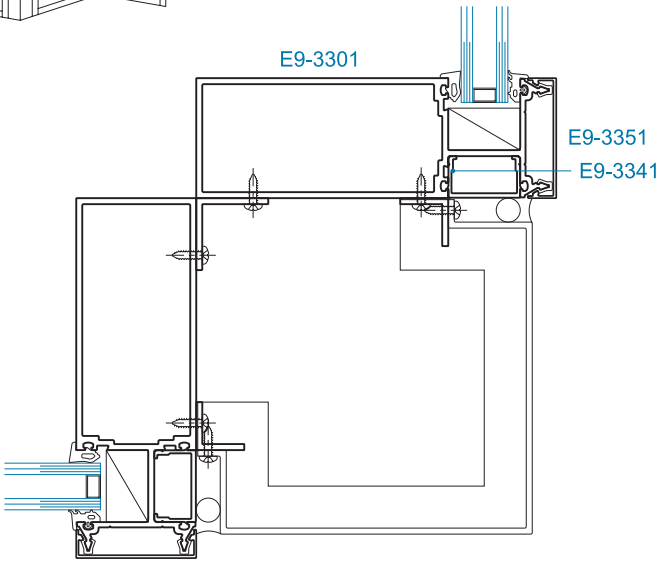


SECTION 6
90° OUTSIDE CORNER

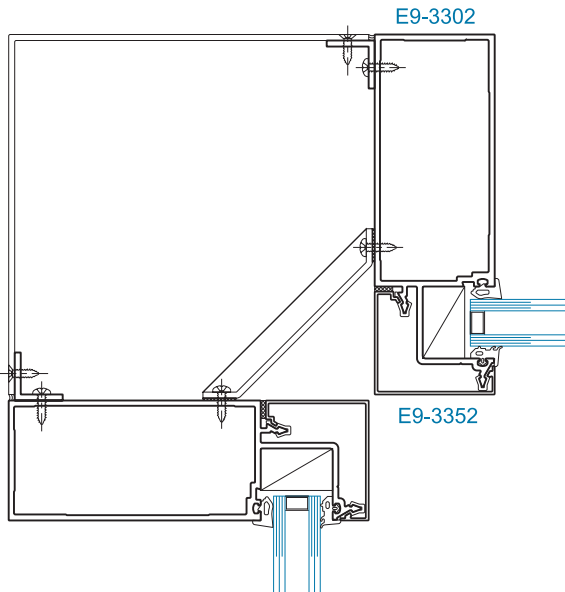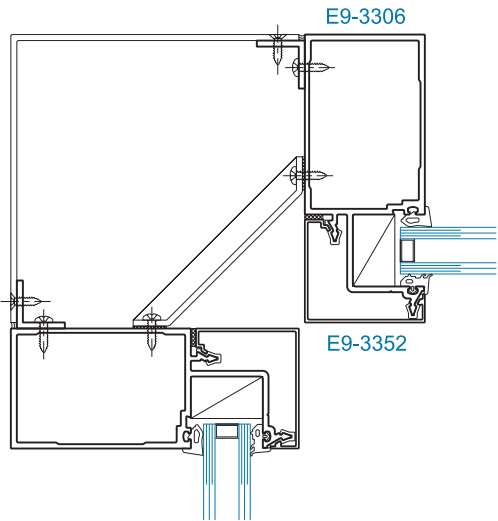


SCALE: 1/4 SIZE




CORNER FRAMING MEMBERS FOR 1" GLAZING

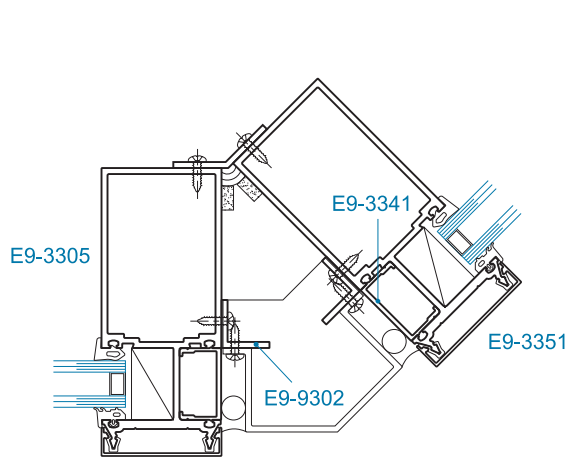


SECTION 8
135° OUTSIDE CORNER

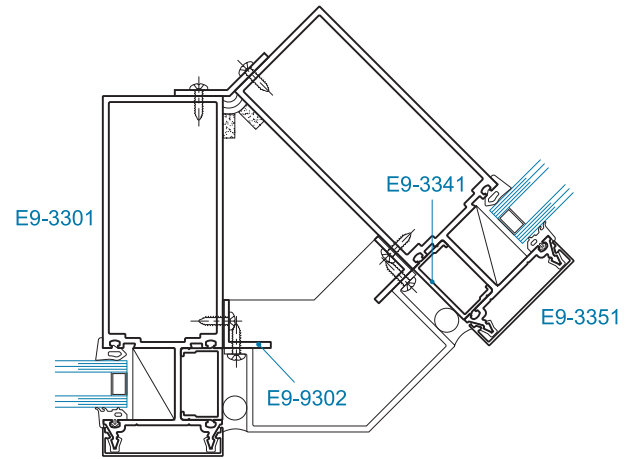


SECTION 8
135° OUTSIDE CORNER

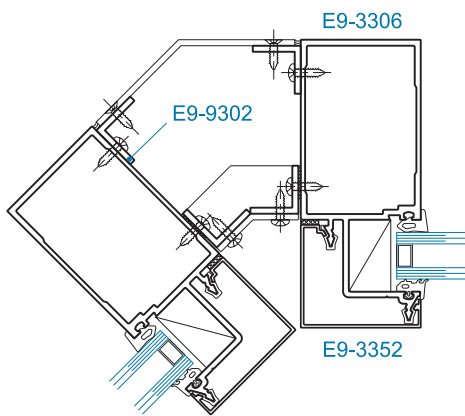

SECTION 9
135° INSIDE CORNER

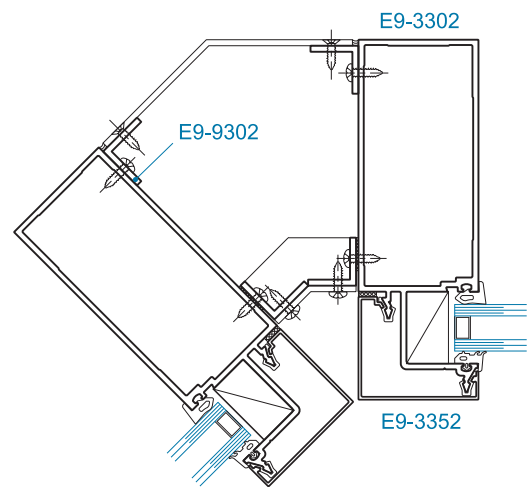


SECTION 9
135° INSIDE CORNER

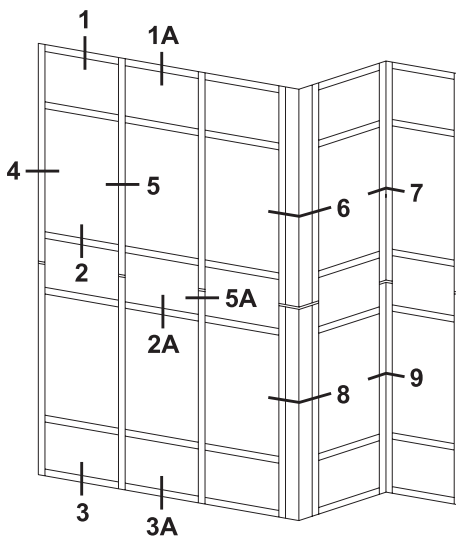


SCALE: 1/4 SIZE
0 3 6



DOOR FRAMING MEMBERS

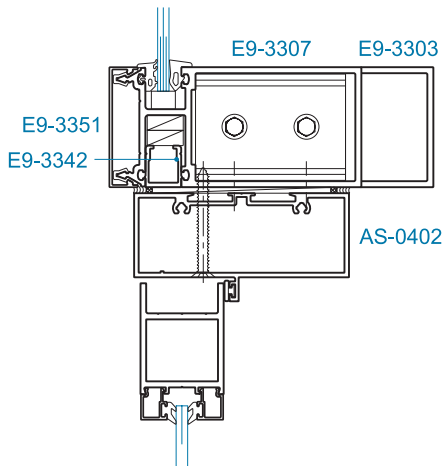


SECTION 10
TRANSOM BAR
1/4" GLAZING

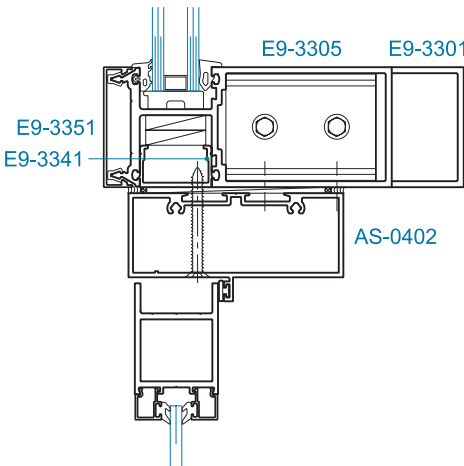


SECTION 10
TRANSOM BAR
1" GLAZING

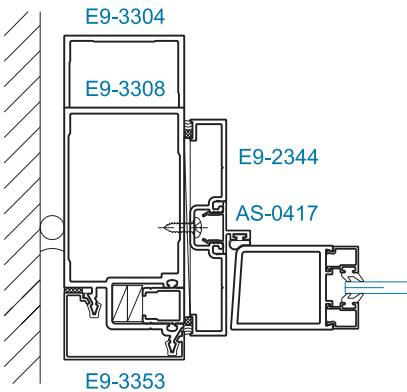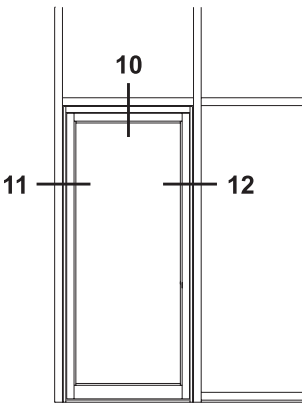


SECTION 11
DOOR JAMB
1/4" GLAZING

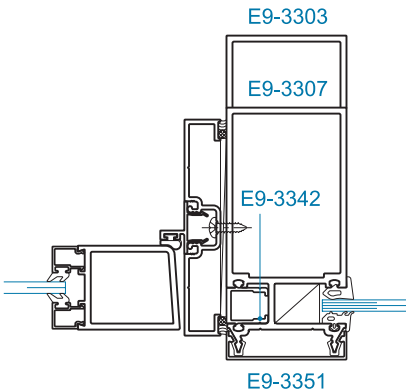

SECTION 12
DOOR JAMB
1/4" GLAZING

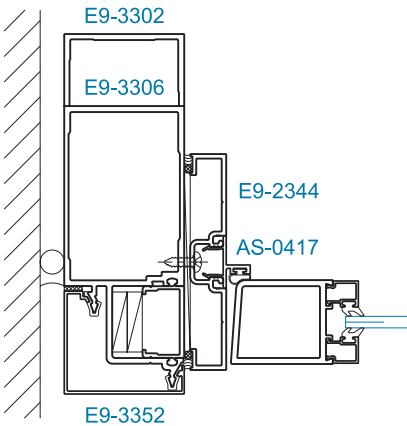


SECTION 11
DOOR JAMB
1" GLAZING

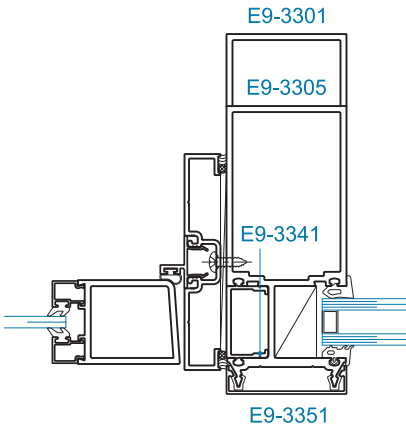

SECTION 12
DOOR JAMB
1" GLAZING

SCALE: 1/4 SIZE



WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS



DEFLECTION CRITERIA AAMA TIR-A11 - L/175 or L/240 + 1/4" (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)
CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN 3/4" (19.1mm)

ALLOWABLE WIND LOAD STRESS


YKK AP tested standard. Contact YKK AP for more information.

These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span.
For other applications, please contact YKK AP engineers at 1-866-955-2732.

E9-3307

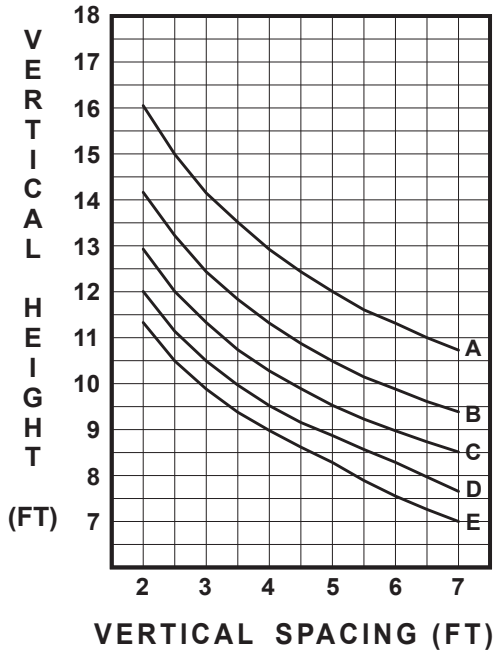


$I_{xx}=5.678 \text{ in}^4$
(236.34 cm^4)





$I_{xx}=8.213 \text{ in}^4$
(341.85 cm^4)

A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)


E9-3305

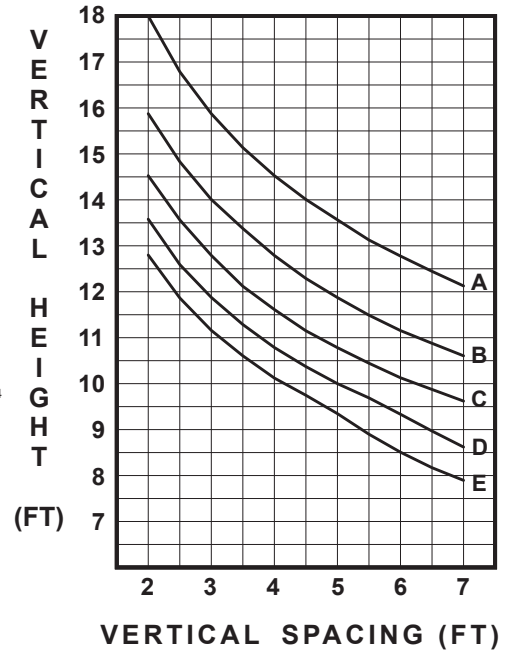

E9-3303

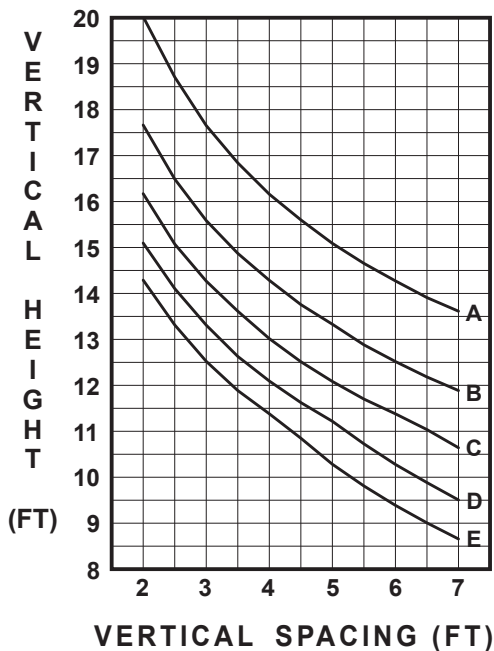

$I_{xx}=11.595 \text{ in}^4$
(482.62 cm^4)



$I_{xx}=13.903 \text{ in}^4$
(578.7 cm^4)

E9-3301

