

TABLE OF CONTENTS

YCU 750 TU UNITIZED CURTAIN WALL SYSTEM

PICTORIAL VIEW..... Page 2

TYPICAL UNIT INSTALLATION..... Page 3

TYPICAL MID ANCHORS Page 4 to 5

FRAMING MEMBERS..... Page 6


CORNER FRAMING MEMBERS Page 7

WIND LOAD CHARTS Page 8

DEAD LOAD CHARTS Page 9

*The latest installation instructions for this product are available at www.ykkap.com.


UNITIZED CURTAIN WALL SYSTEM

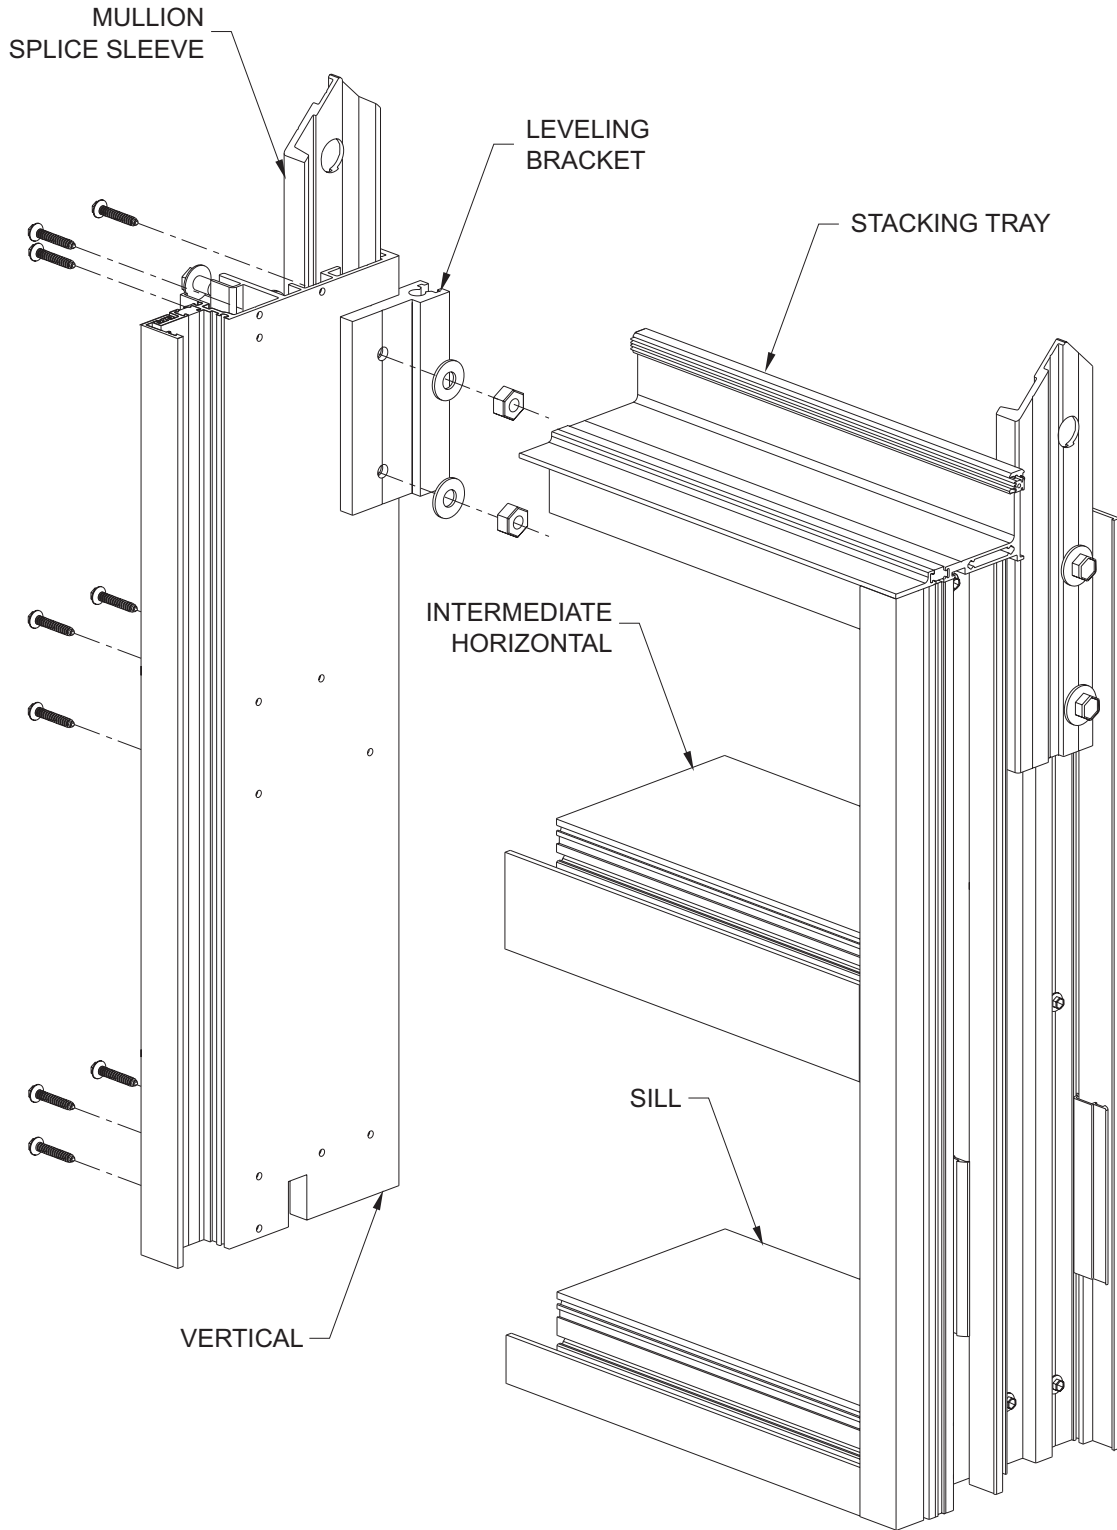


TYPICAL UNIT INSTALLATION




TYPICAL DEAD LOAD ANCHOR

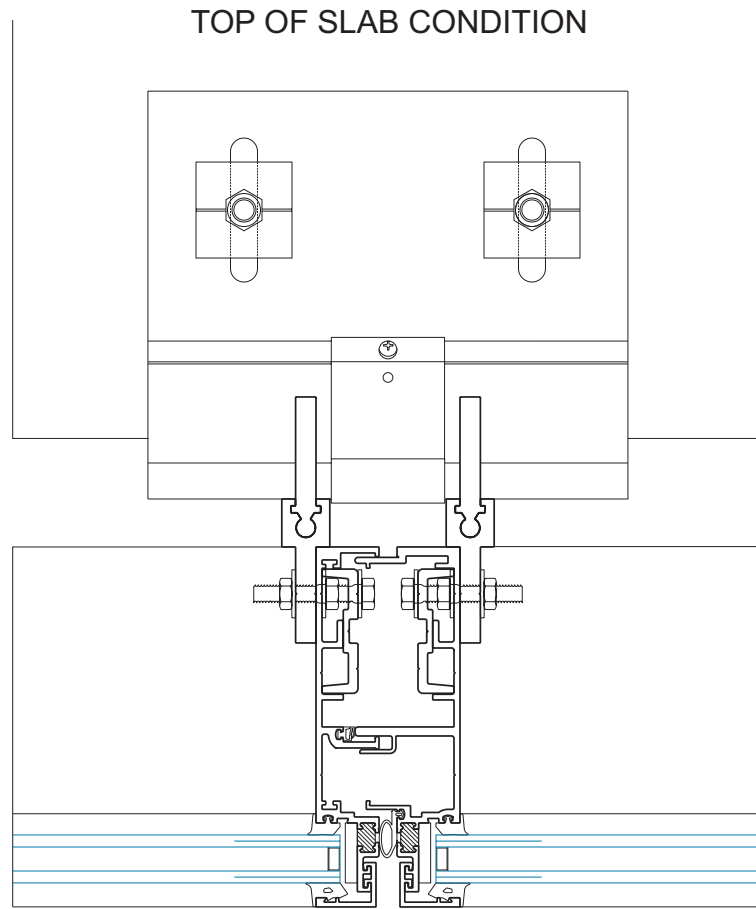


TOP OF SLAB CONDITION

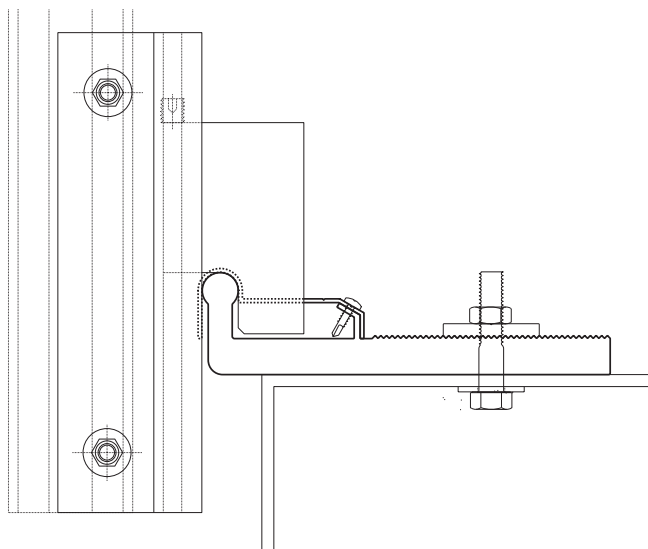


TOP OF SLAB CONDITION (SIDE VIEW)




TYPICAL DEAD LOAD ANCHOR

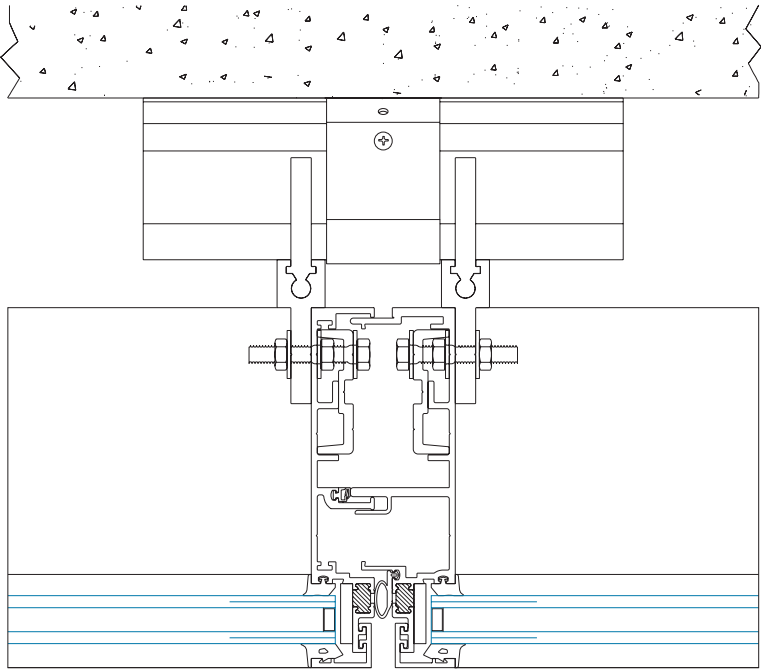








FRONT OF SLAB CONDITION

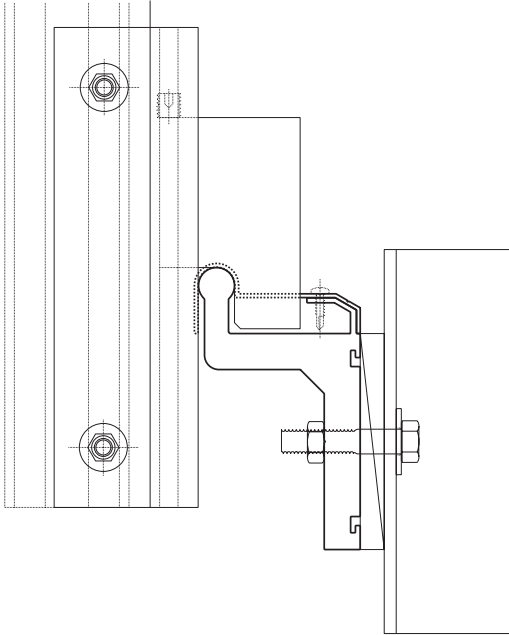


FRONT OF SLAB CONDITION (SIDE VIEW)




STANDARD FRAMING MEMBERS

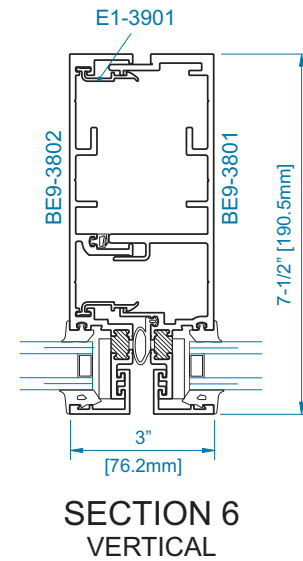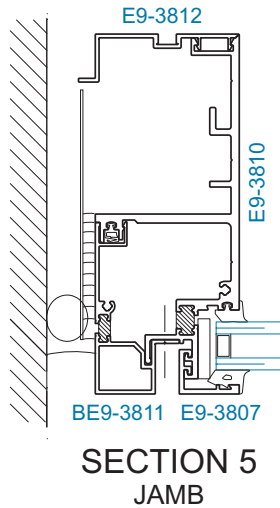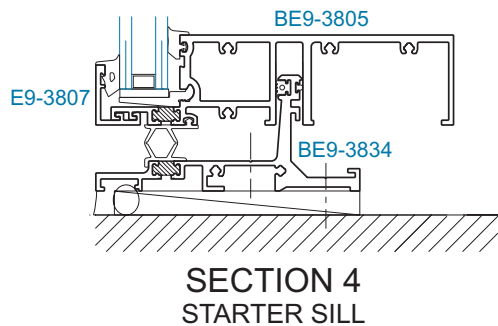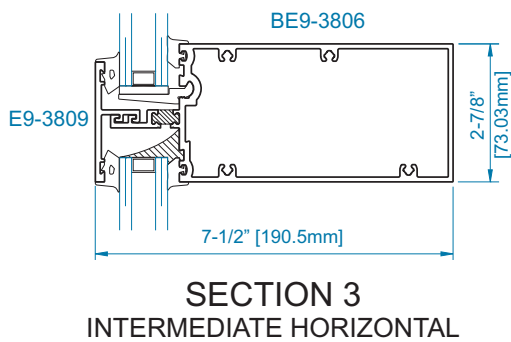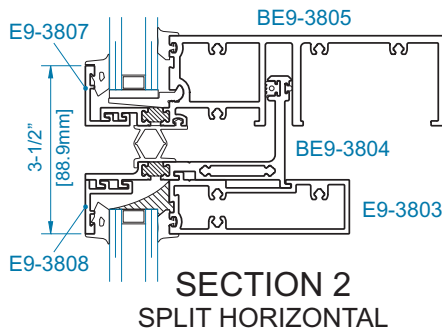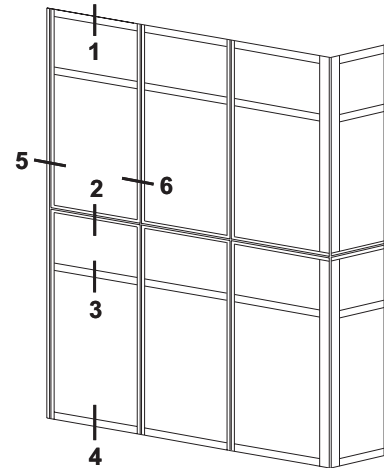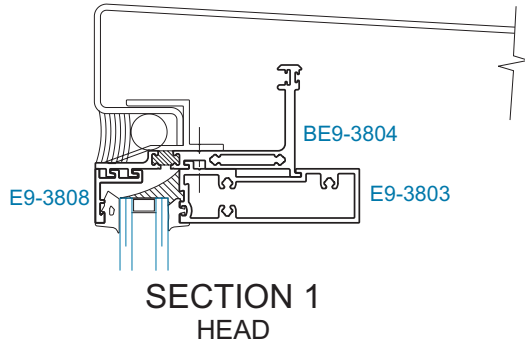



CORNER FRAMING MEMBERS

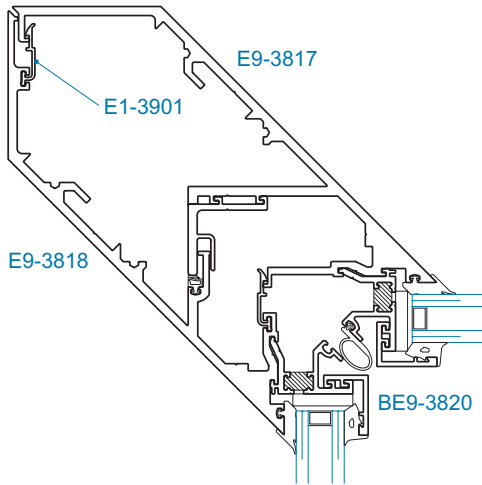

SECTION 7
90° INSIDE CORNER

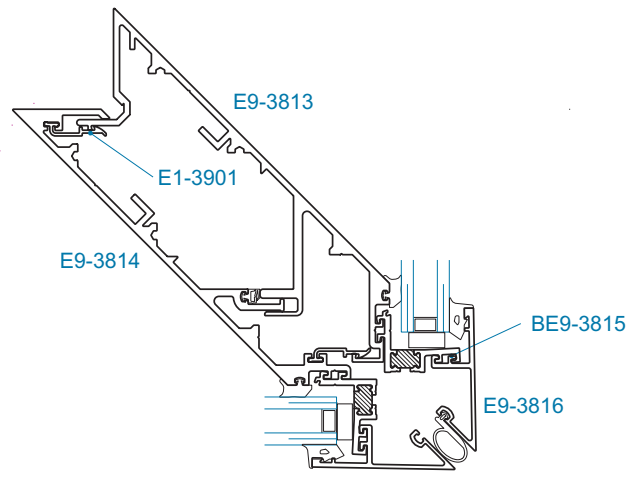

SECTION 8
90° OUTSIDE CORNER

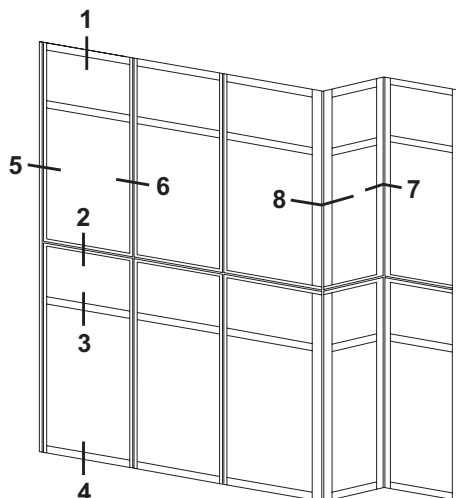


WIND LOAD CHARTS


DEFLECTION CRITERIA: AAMA TIR-A11 - L/175 or L/240 + 1/4" (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)
 CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN 3/4" (19.1mm)

ALLOWABLE WIND LOAD STRESS:
 YKK AP tested standard. Contact YKK AP for more information.



These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span. For other applications, please contact YKK AP engineers at 1-866-955-2732.

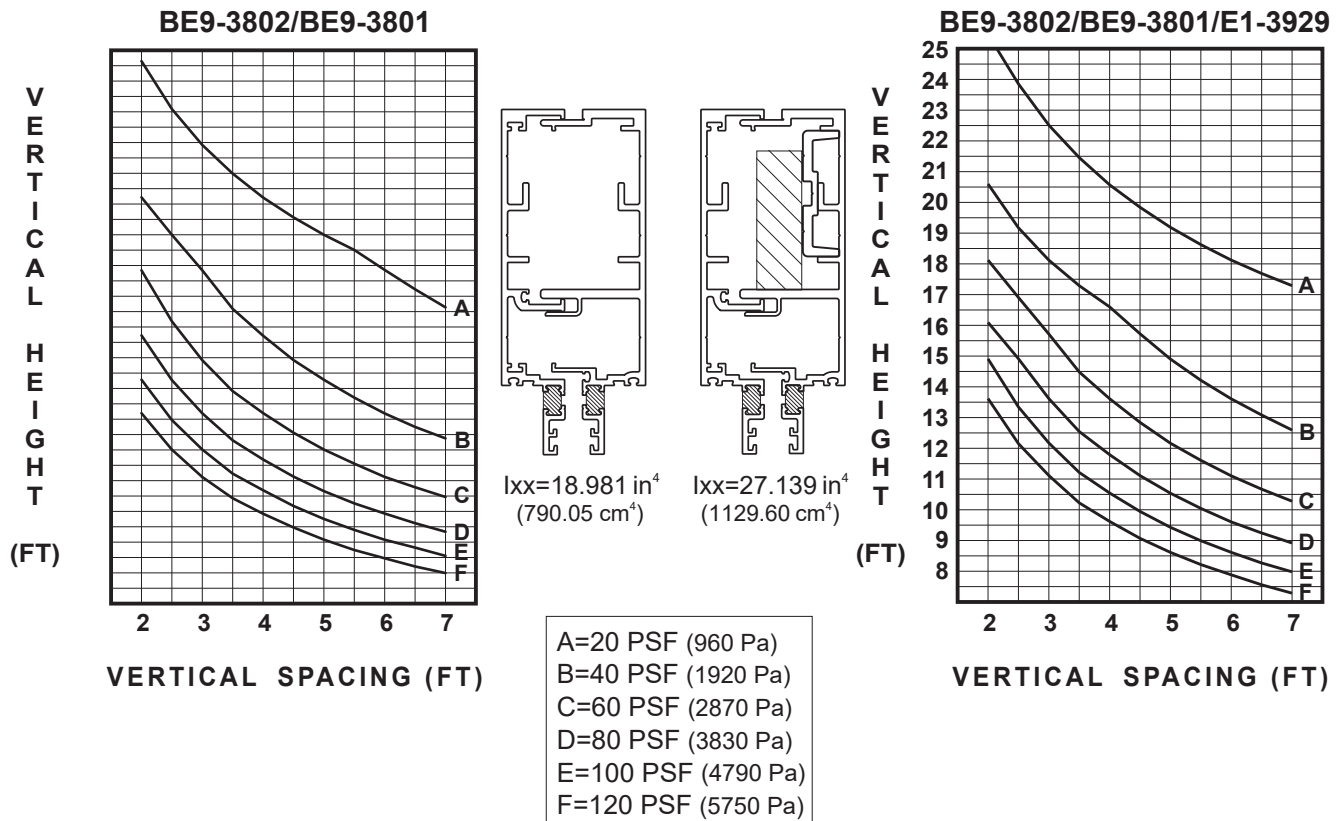


DEAD LOAD CHARTS



BE9-3805

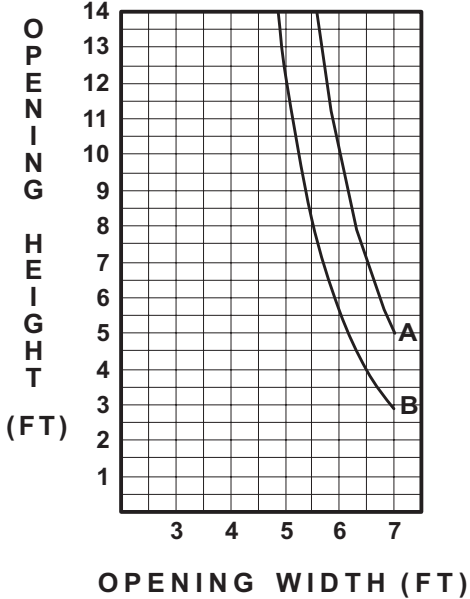

BE9-3806

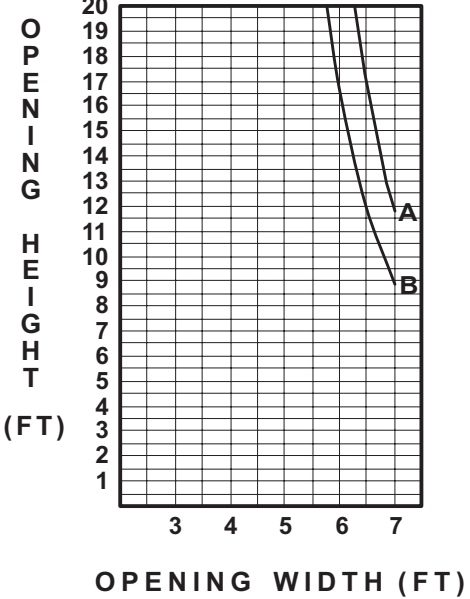

A = Setting Blocks at 1/8 Point Locations
 B = Setting Blocks at 1/4 Point Locations

Note: Dead load requirements are based upon a maximum deflection of 1/8" (3.2mm) at the center of the horizontal.