TABLE OF CONTENTS

YCW 750 XT HIGH PERFORMANCE CURTAIN WALL SYSTEM FOR 1", 1-1/2", 1-3/4" AND 2" GLAZING

PICTORIAL VIEW ..... Page 2

TYPICAL SPLICE CONDITION ..... Page 3

MULLION END ANCHORS ..... Pages 4 to 5

TYPICAL MID ANCHORS ..... Page 6

FRAMING MEMBERS FOR 1" GLAZING (1/4 SIZE) ..... Pages 7 to 12

DOOR FRAMING MEMBERS FOR 1" GLAZING (1/4 SIZE) ..... Page 13

FRAMING MEMBERS FOR 1-1/2" GLAZING (1/4 SIZE) ..... Pages 14 to 19

DOOR FRAMING MEMBERS FOR 1-1/2" GLAZING (1/4 SIZE) ..... Page 20

FRAMING MEMBERS FOR 1-3/4" GLAZING (1/4 SIZE) ..... Pages 21 to 26

DOOR FRAMING MEMBERS FOR 1-3/4" GLAZING (1/4 SIZE) ..... Page 27


FRAMING MEMBERS FOR 2" GLAZING (1/4 SIZE) ..... Pages 28 to 33

DOOR FRAMING MEMBERS FOR 2" GLAZING (1/4 SIZE) ..... Page 34


WIND LOAD CHARTS (YCW 750 XT / XTP) ..... Pages 35 to 41

*The latest installation instructions for this product are available at www.ykkap.com.


OUTSIDE GLAZED CURTAIN WALL SYSTEM

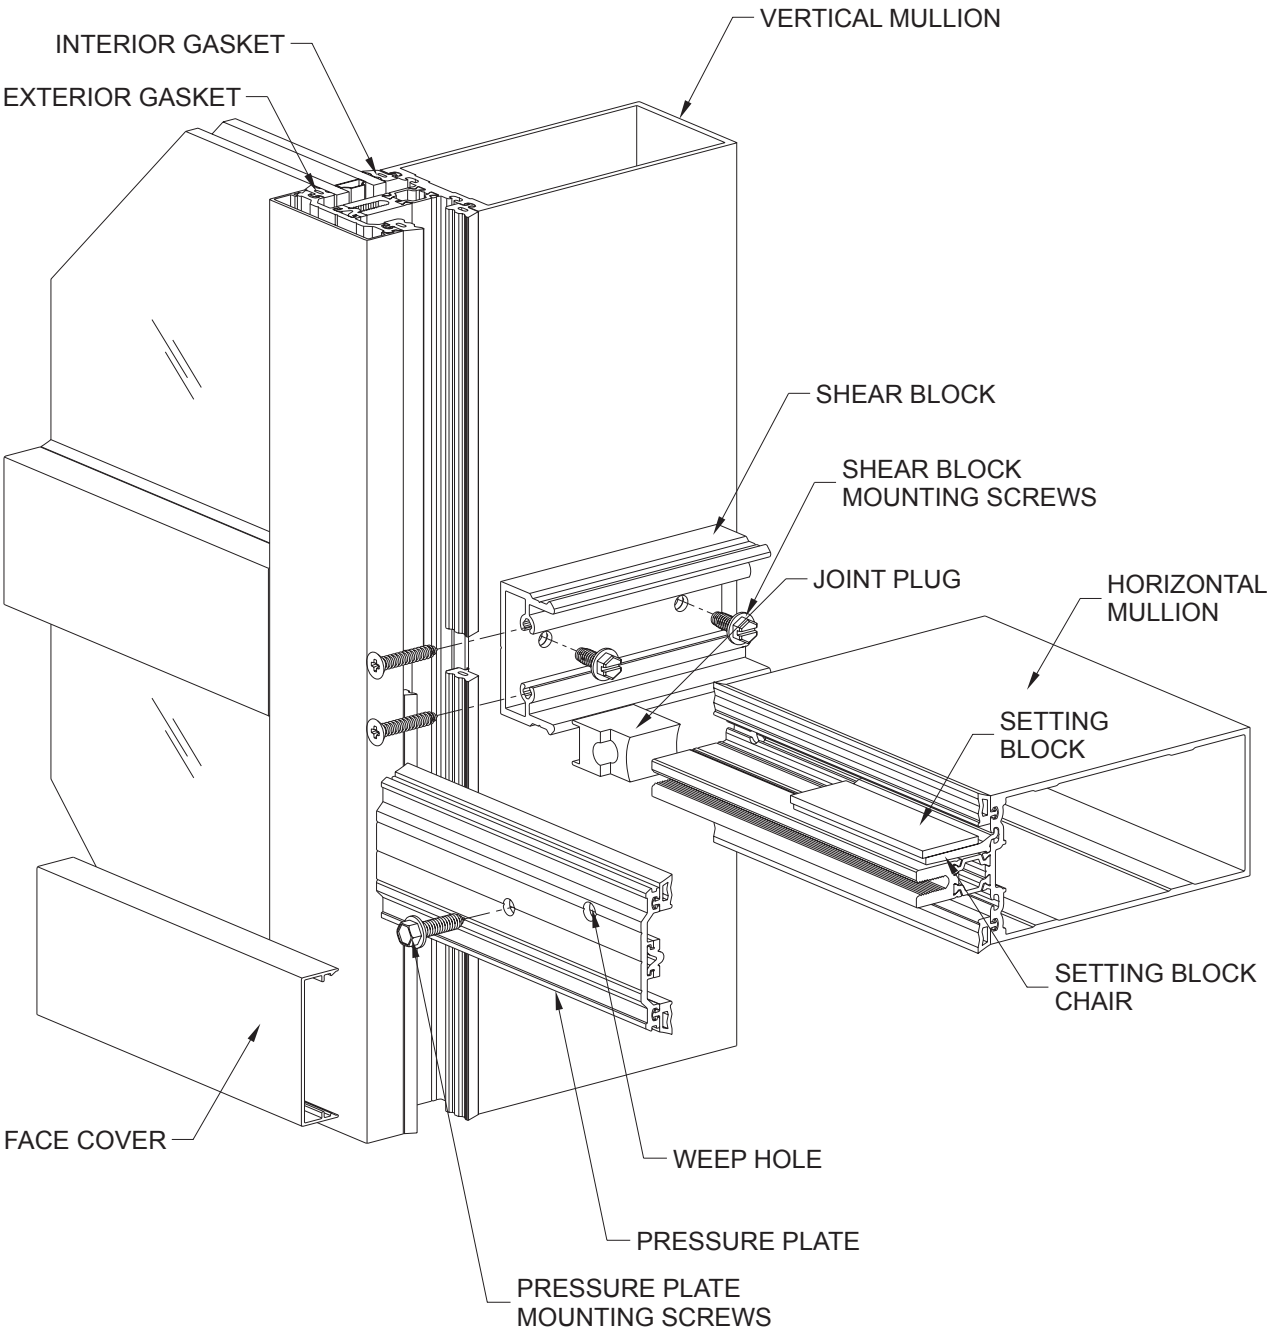


TYPICAL SPLICE CONDITION

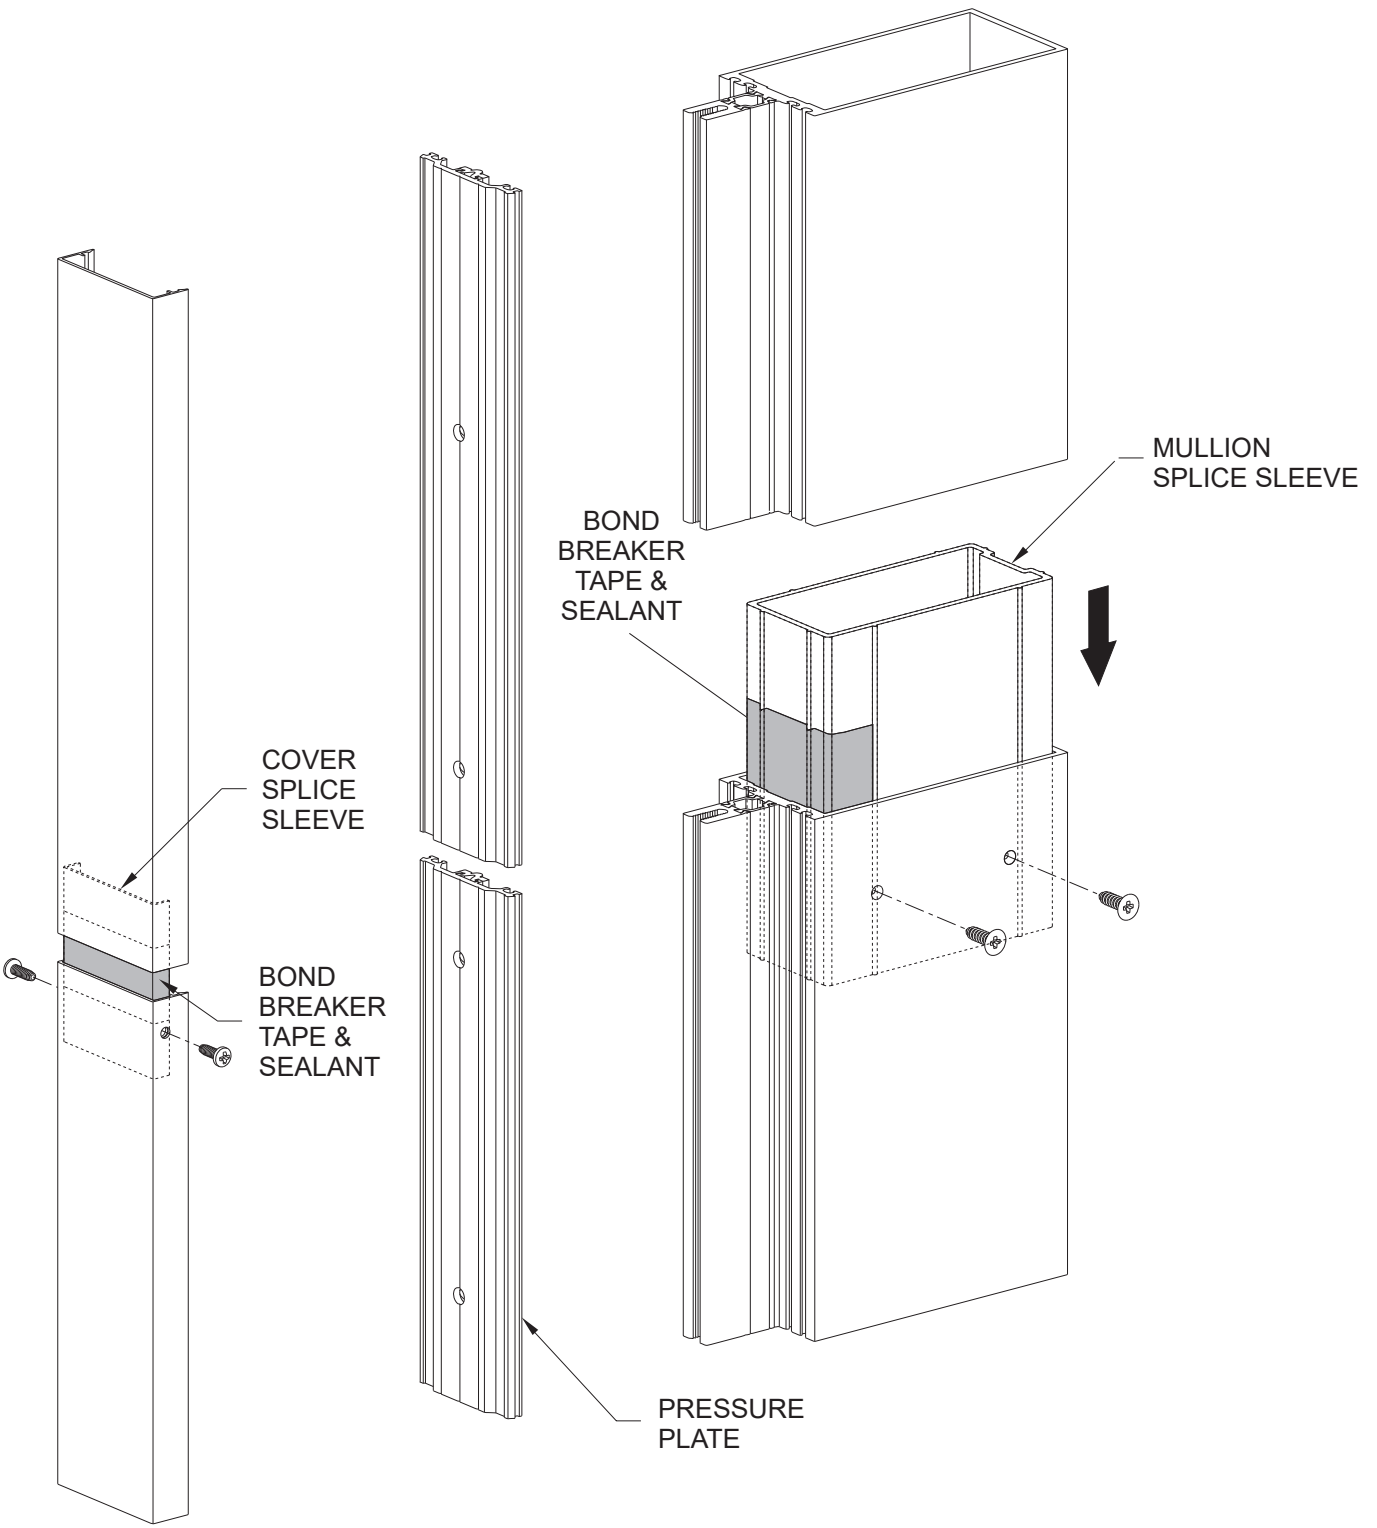


VERTICAL MULLION WITH “T” END ANCHOR

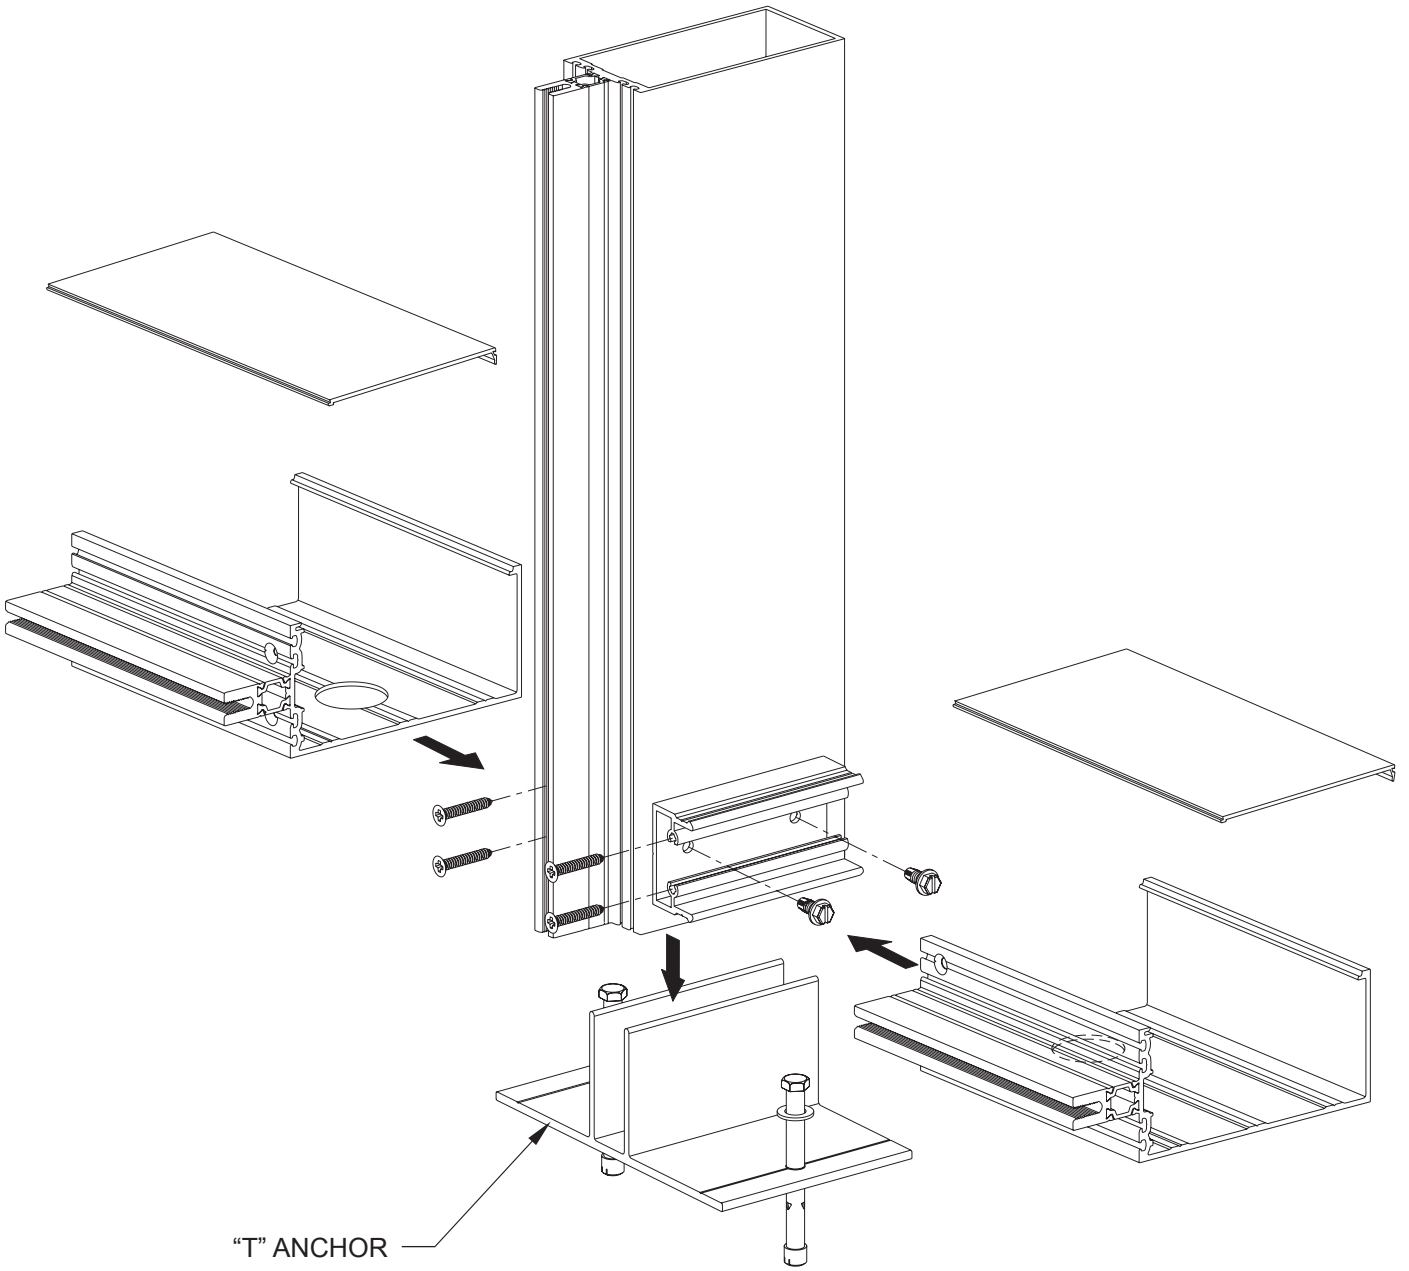


VERTICAL MULLION WITH “J” END ANCHOR

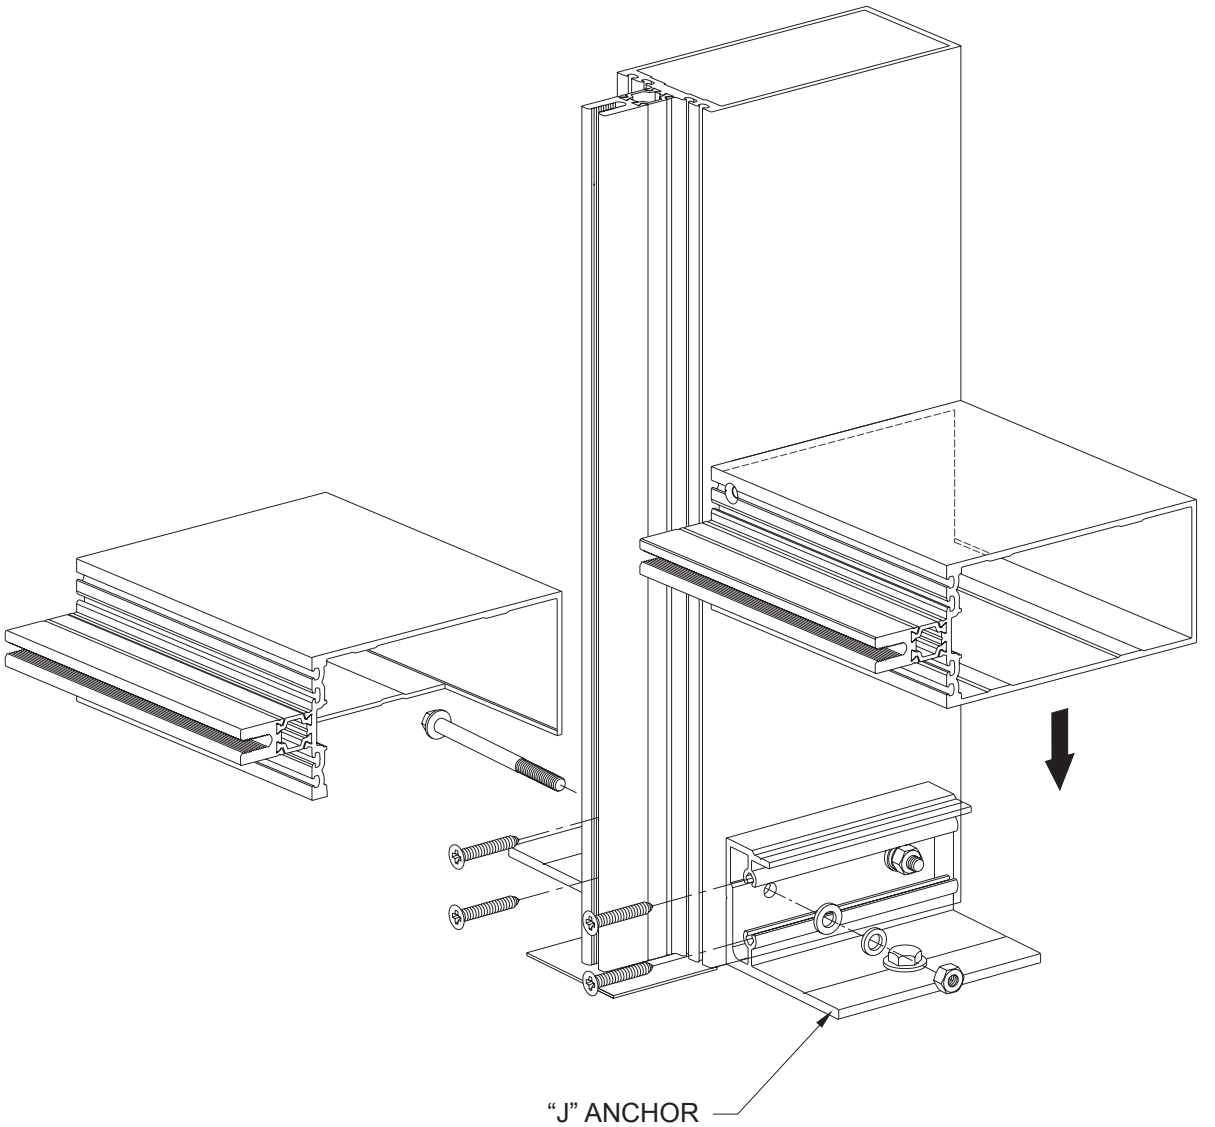


TYPICAL MID ANCHORS FOR WIND LOAD & DEAD LOAD

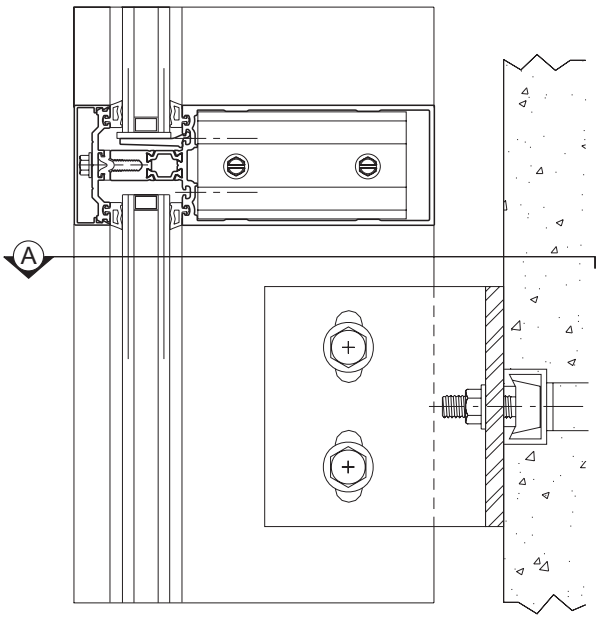


TYPICAL WIND LOAD ANCHOR

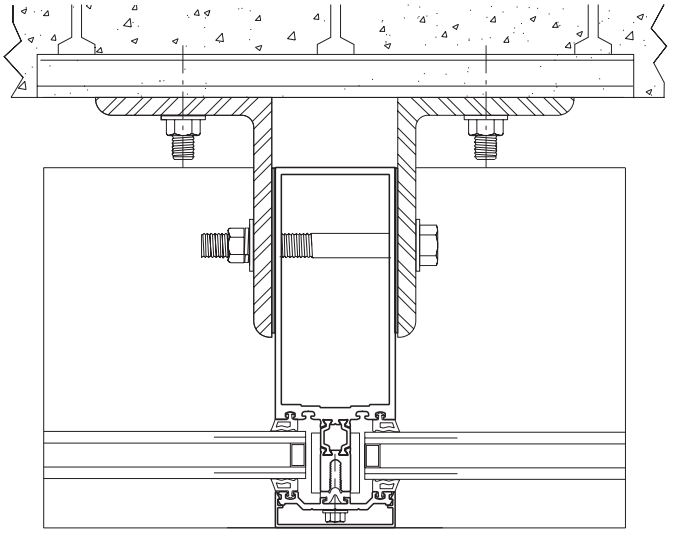

SECTION A

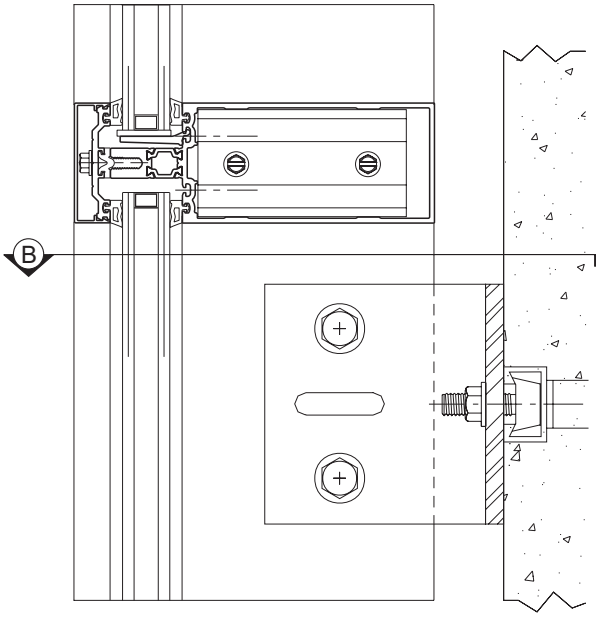

TYPICAL DEAD LOAD ANCHOR

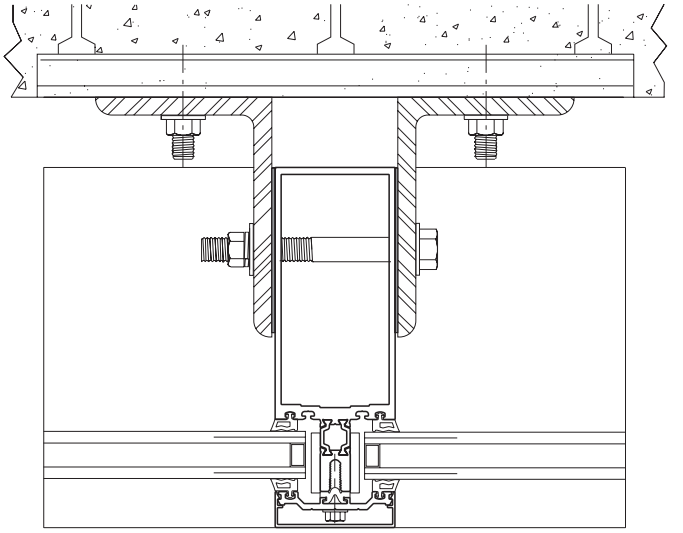


SECTION B


SCALE: 1/4 SIZE


0 3 6

STANDARD FRAMING MEMBERS FOR 1" GLAZING

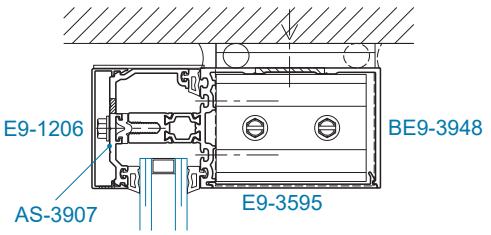


SECTION 1
OPEN BACK HEAD

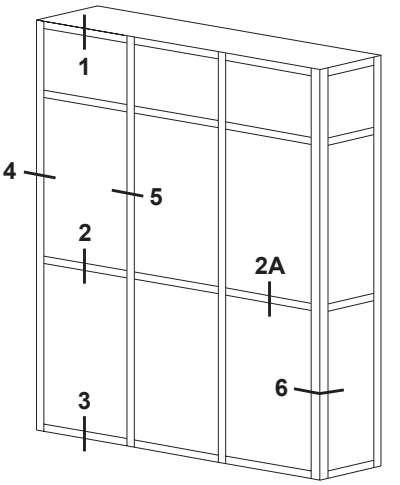


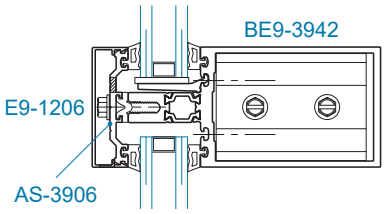


SECTION 2
HORIZONTAL




SECTION 4
JAMB

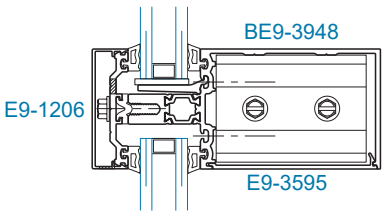


SECTION 2A
OPEN BACK HORIZONTAL

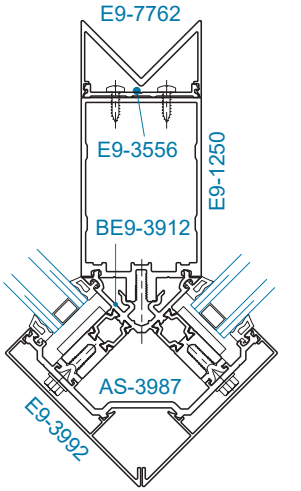

SECTION 6
90° OUTSIDE CORNER

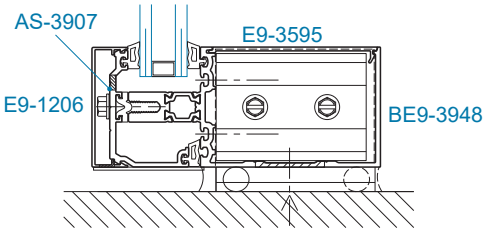


SECTION 3
OPEN BACK SILL

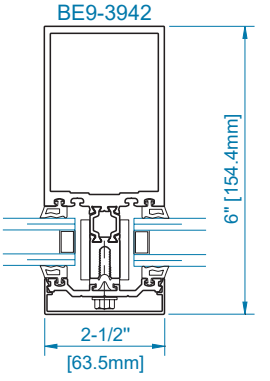


SECTION 5
VERTICAL


SCALE: 1/4 SIZE
0 3 6

OPTIONAL FRAMING MEMBERS FOR 1" GLAZING

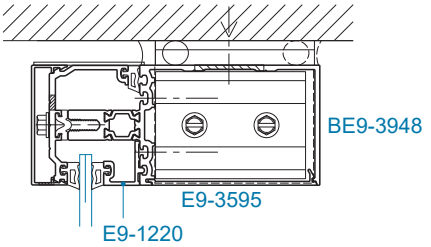


SECTION 1B
OPTIONAL HEAD
(1/4" GI.)

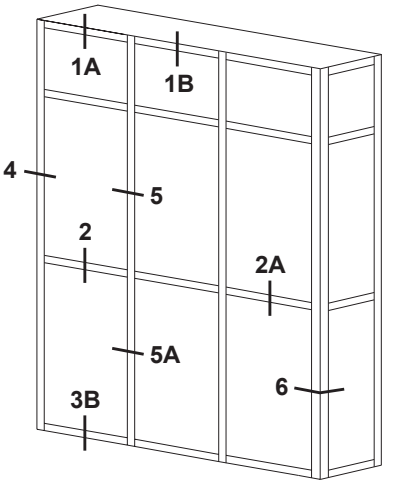


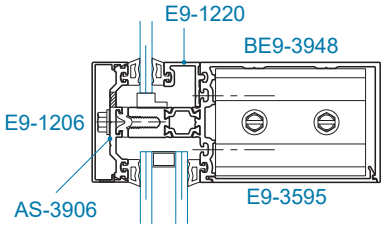


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1"GI.)




SECTION 4
JAMB




SECTION 5A
SSG VERTICAL

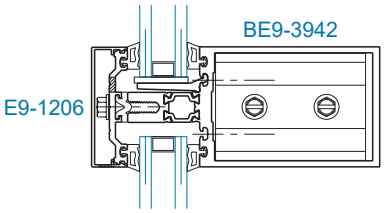


SECTION 2A
HORIZONTAL

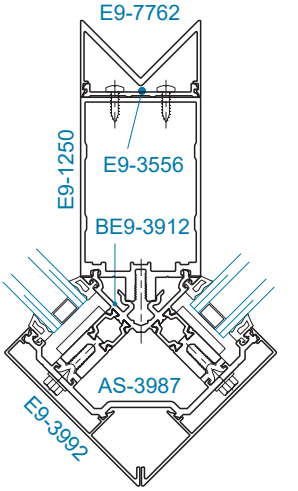

SECTION 6
90° OUTSIDE CORNER

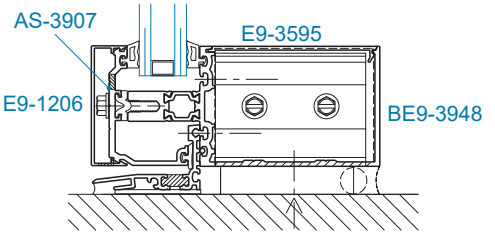


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

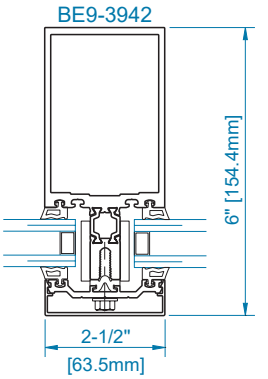


SECTION 5
VERTICAL

SCALE: 1/4 SIZE
0 3 6


STANDARD FRAMING MEMBERS FOR 1" GLAZING

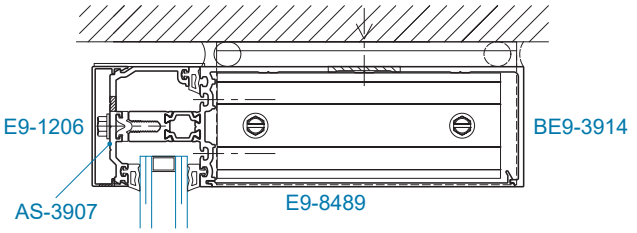


SECTION 1
OPEN BACK HEAD

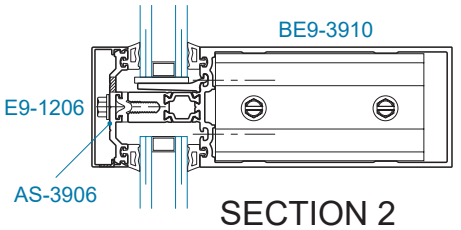


SECTION 2
HORIZONTAL

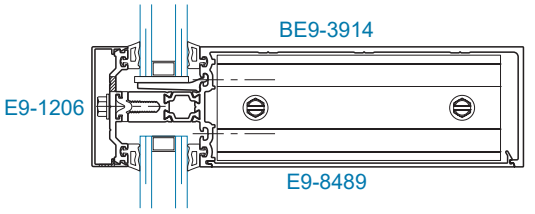


SECTION 2A
OPEN BACK HORIZONTAL

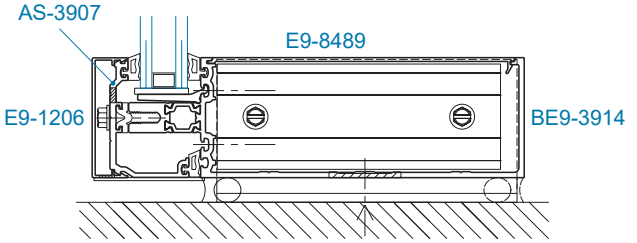


SECTION 3
OPEN BACK SILL

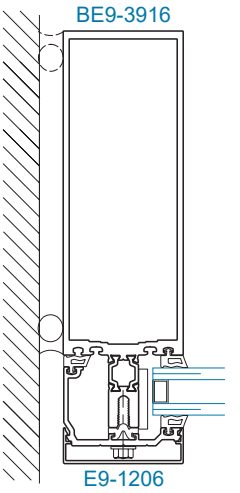


SECTION 4
JAMB

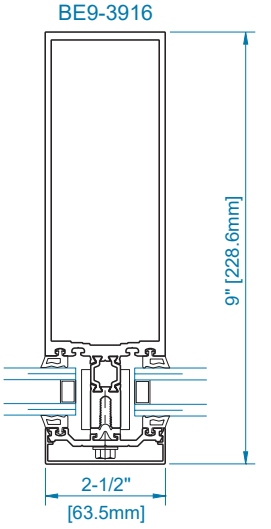

SECTION 5
VERTICAL

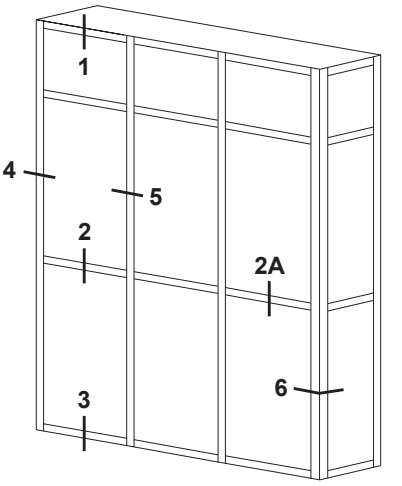


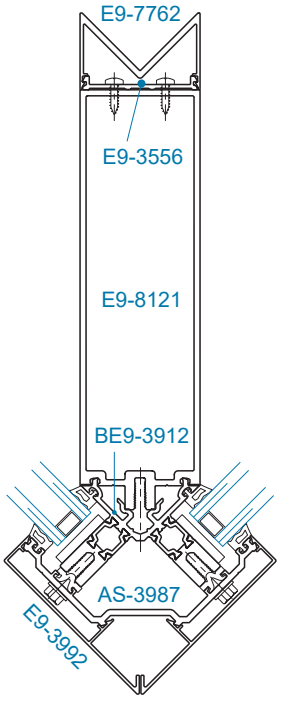


SECTION 6
90° OUTSIDE CORNER


SCALE: 1/4 SIZE
0 3 6

OPTIONAL FRAMING MEMBERS FOR 1" GLAZING

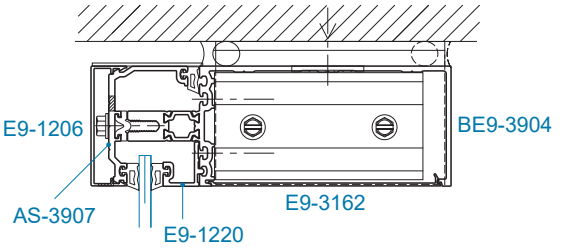


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

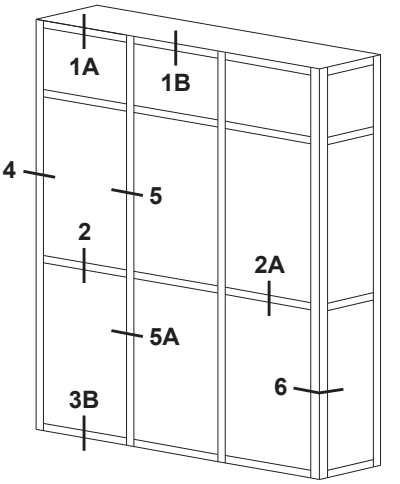


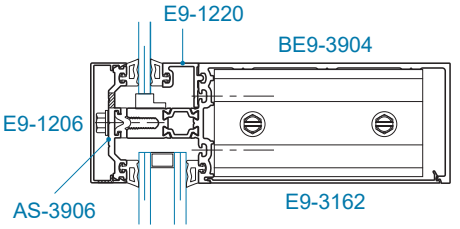


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

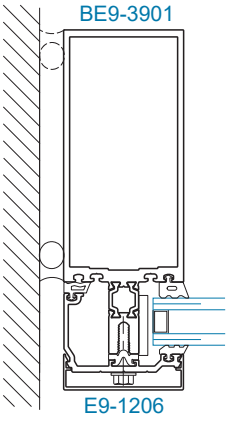


SECTION 4
JAMB

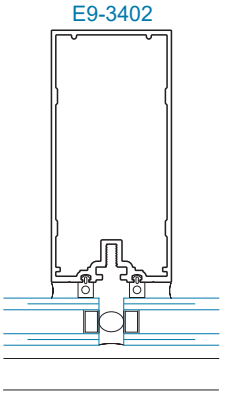


SECTION 5A
SSG VERTICAL

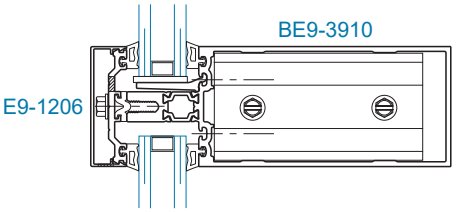


SECTION 2A
HORIZONTAL

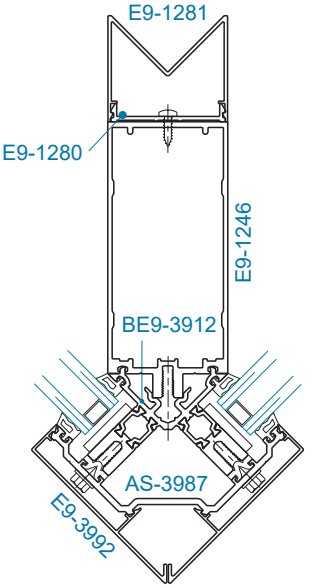

SECTION 6
90° OUTSIDE CORNER

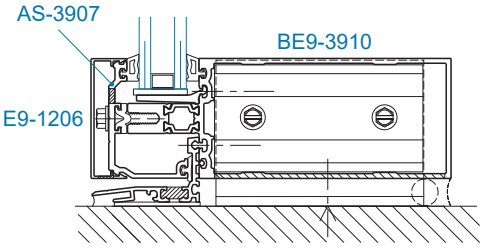


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

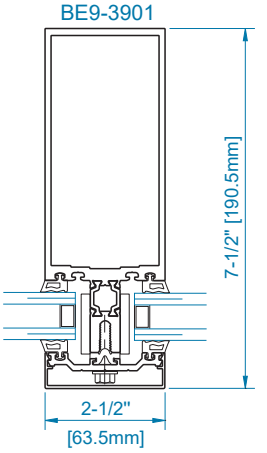


SECTION 5
VERTICAL

SCALE: 1/4 SIZE
0 3 6


STANDARD FRAMING MEMBERS FOR 1" GLAZING

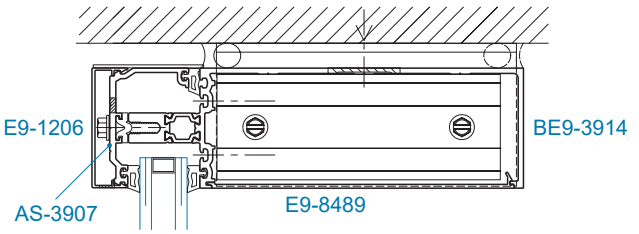


SECTION 1
OPEN BACK HEAD

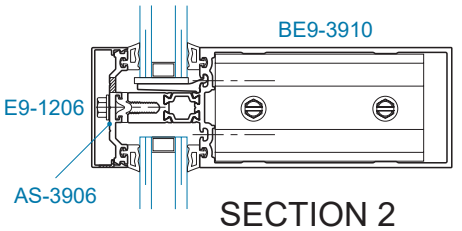


SECTION 2
HORIZONTAL

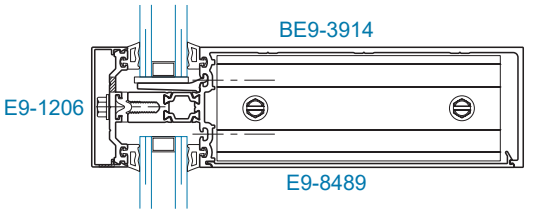


SECTION 2A
OPEN BACK HORIZONTAL

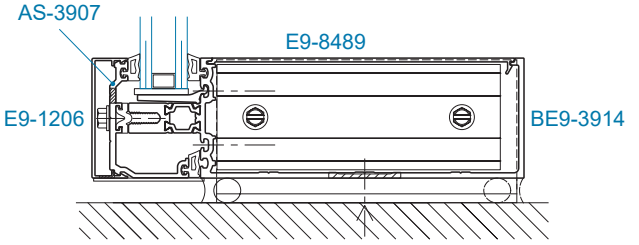


SECTION 3
OPEN BACK SILL

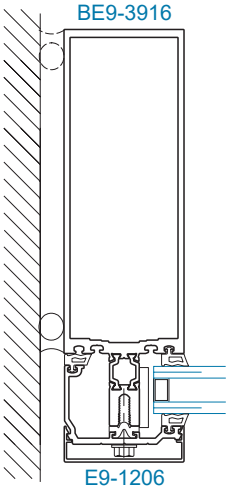


SECTION 4
JAMB

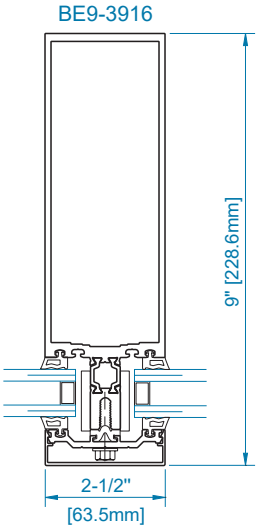

SECTION 5
VERTICAL

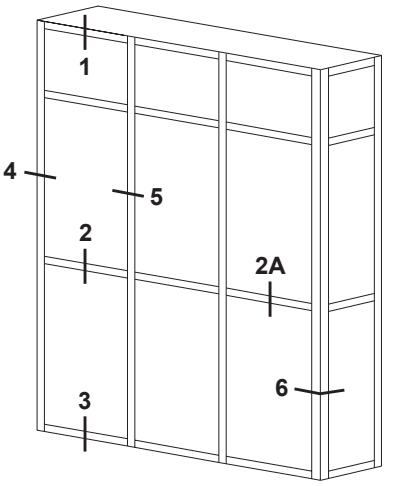


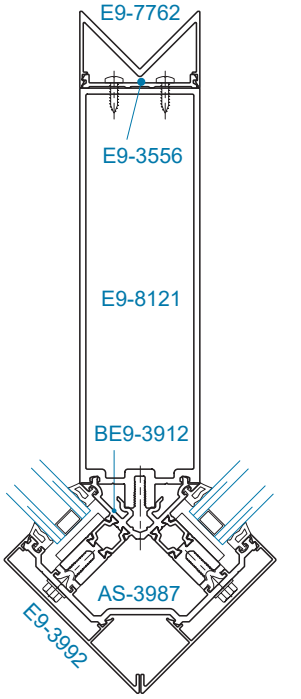


SECTION 6
90° OUTSIDE CORNER


SCALE: 1/4 SIZE
0 3 6

OPTIONAL FRAMING MEMBERS FOR 1" GLAZING

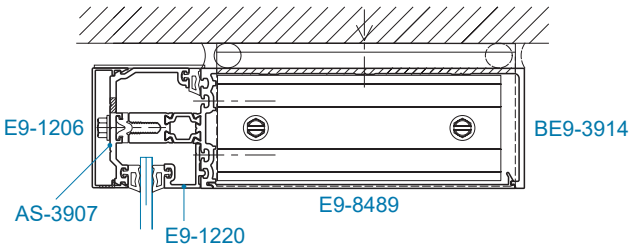


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

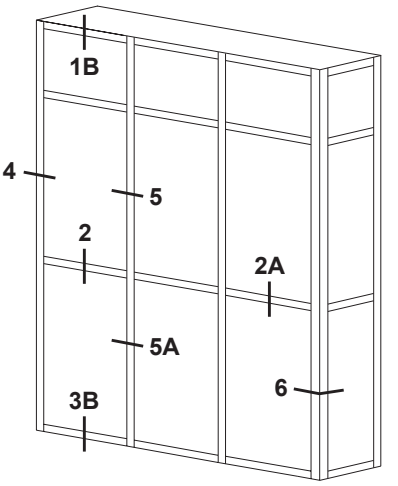


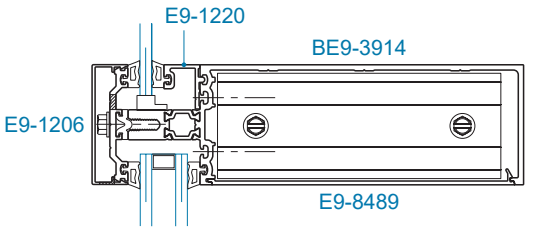


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

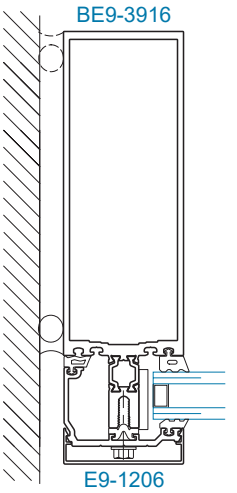


SECTION 4
JAMB

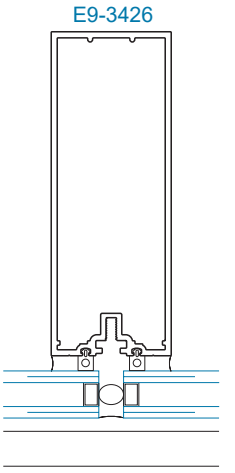


SECTION 5A
SSG VERTICAL

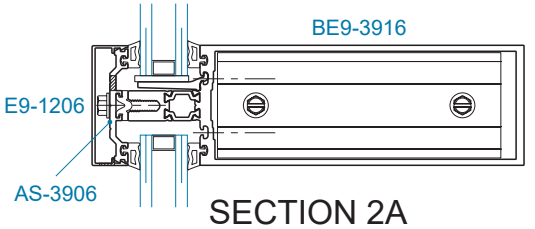


SECTION 2A
HORIZONTAL

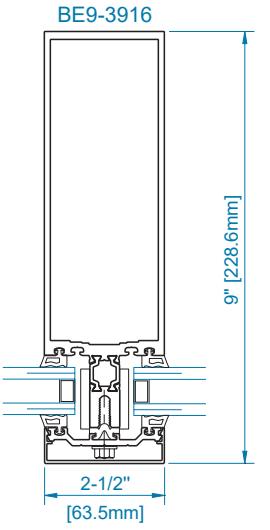

SECTION 5
VERTICAL

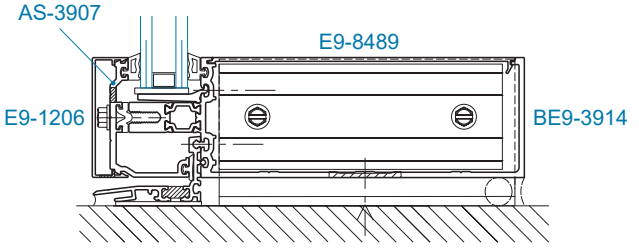


SECTION 3B
SILL w/ OPTIONAL SILL FLASHING

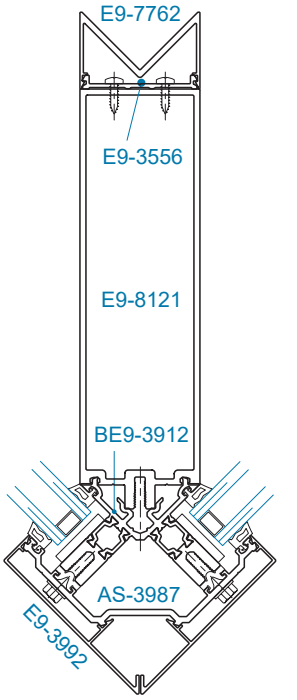


SECTION 6
90° OUTSIDE CORNER


SCALE: 1/4 SIZE
0 3 6

35T DOOR FRAMING MEMBERS FOR 1" GLAZING

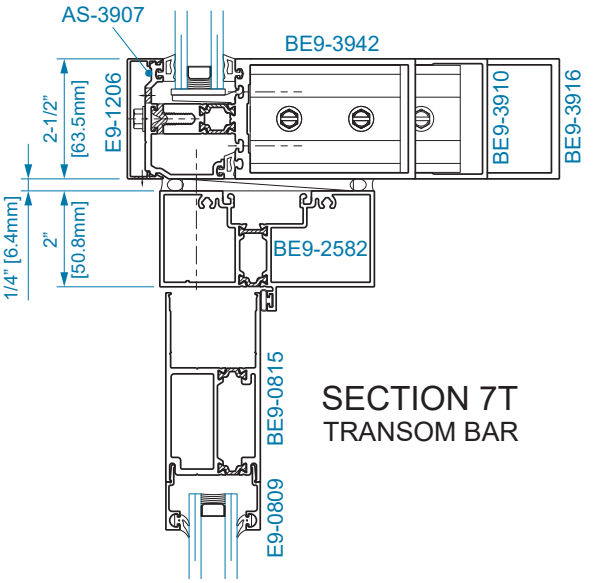


SECTION 7T
TRANSOM BAR

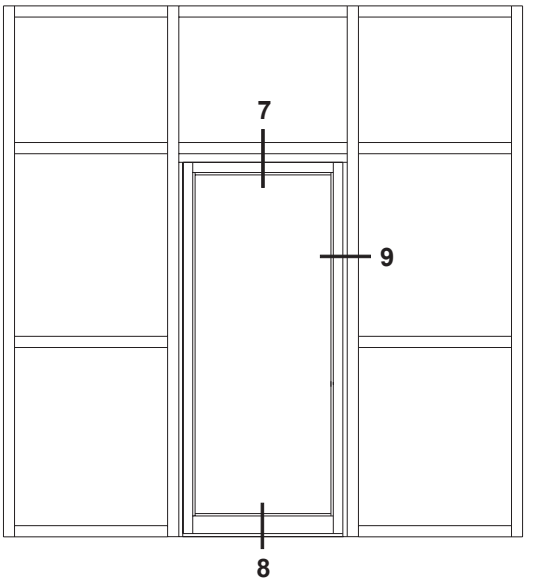

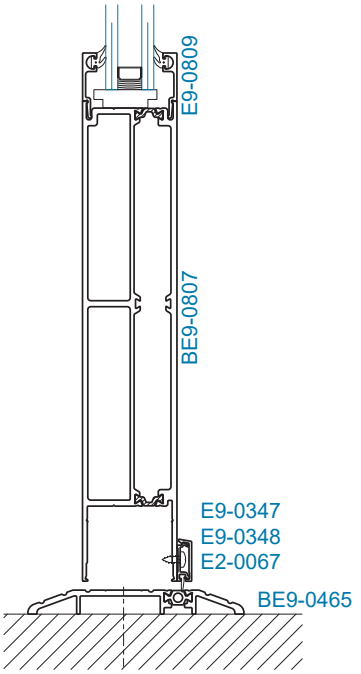


SECTION 8T

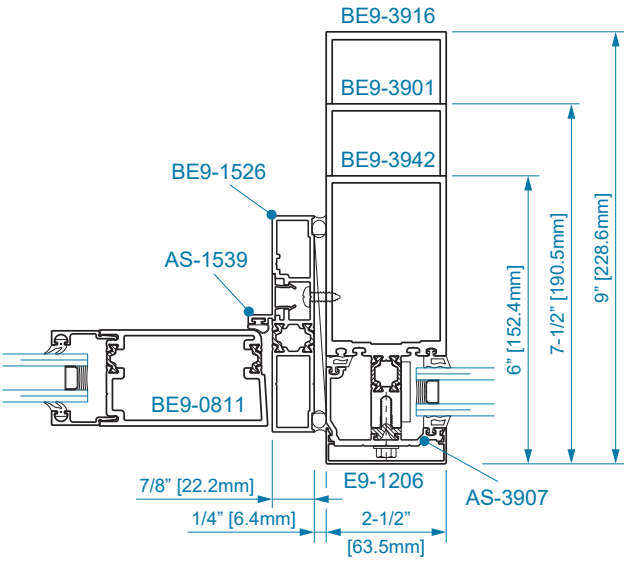


SECTION 9T
DOOR JAMB


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 1-1/2" GLAZING

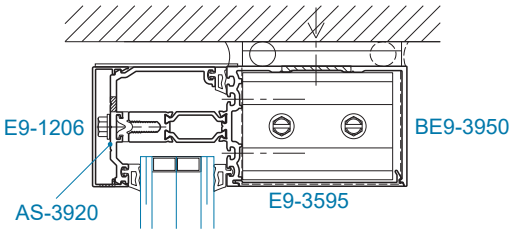


SECTION 1
OPEN BACK HEAD

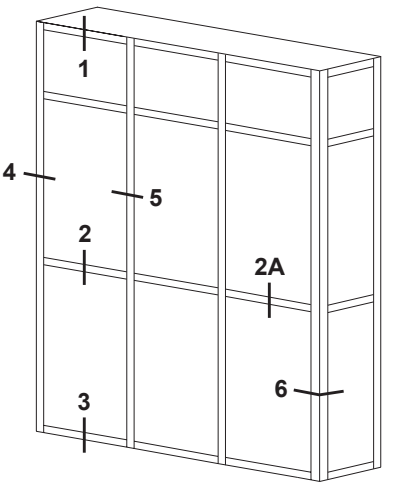


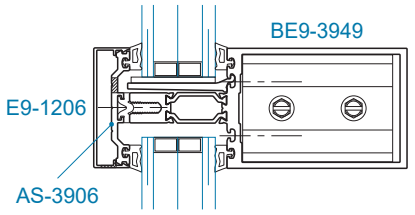


SECTION 2
HORIZONTAL

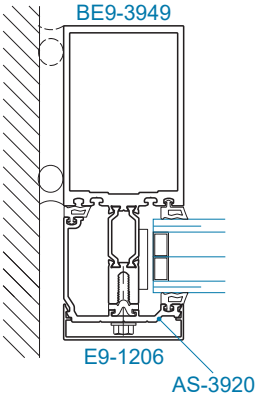


SECTION 4
JAMB

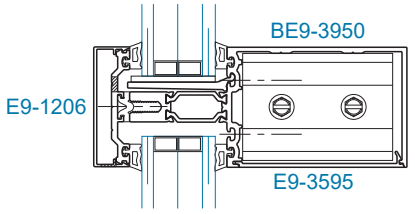


SECTION 2A
OPEN BACK HORIZONTAL

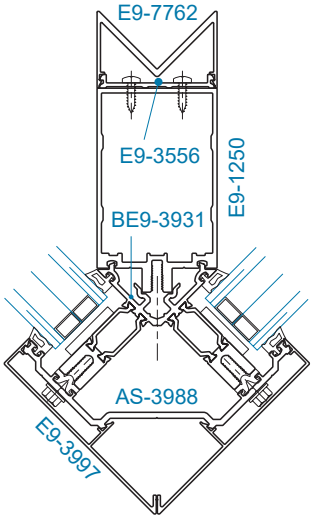

SECTION 6
90° OUTSIDE CORNER

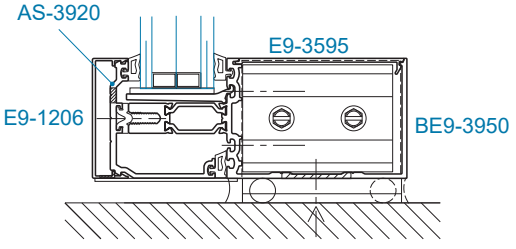


SECTION 3
OPEN BACK SILL

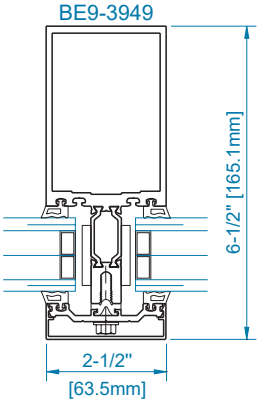


SECTION 5
VERTICAL


SCALE: 1/4 SIZE
0 3 6

OPTIONAL FRAMING MEMBERS FOR 1-1/2" GLAZING

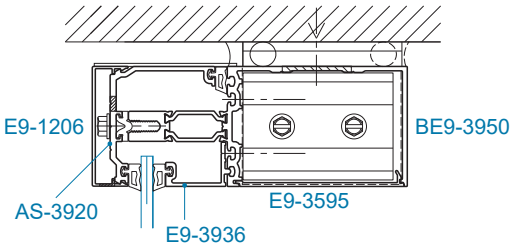


SECTION 1B
OPTIONAL HEAD
(1/4" GI.)

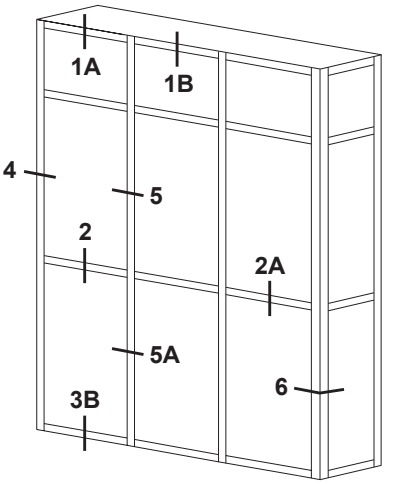


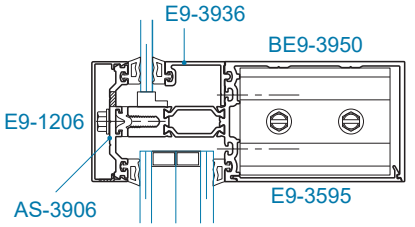


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1"GI.)

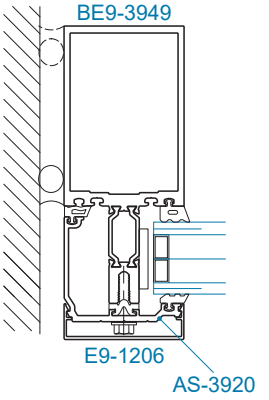


SECTION 4
JAMB




SECTION 5A
SSG VERTICAL

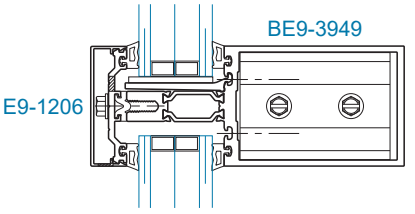


SECTION 2A
HORIZONTAL

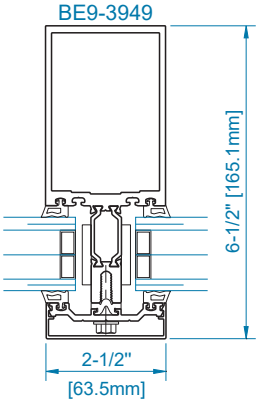

SECTION 5
VERTICAL

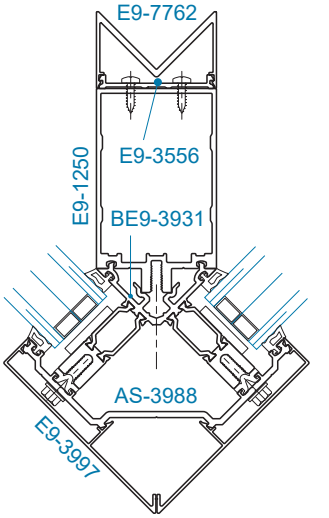


SECTION 6
90° OUTSIDE CORNER

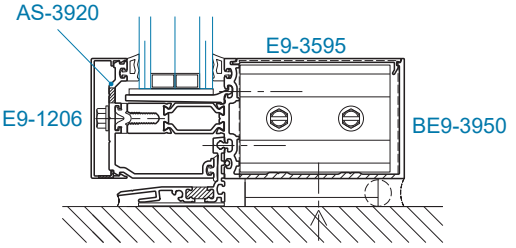


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING


SCALE: 1/4 SIZE
0 3 6

STANDARD FRAMING MEMBERS FOR 1-1/2" GLAZING

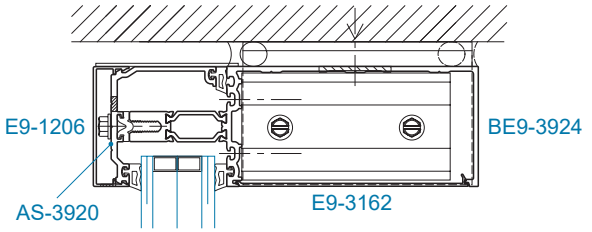


SECTION 1
OPEN BACK HEAD

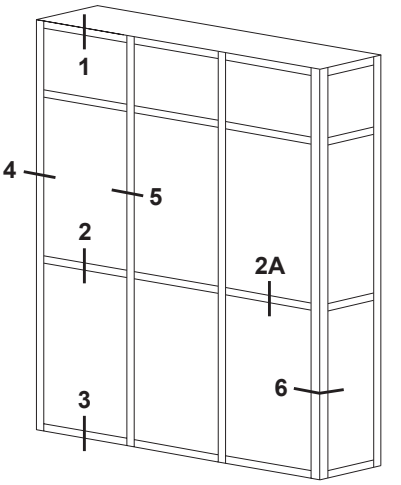


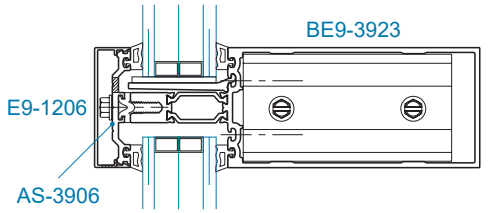


SECTION 2
HORIZONTAL

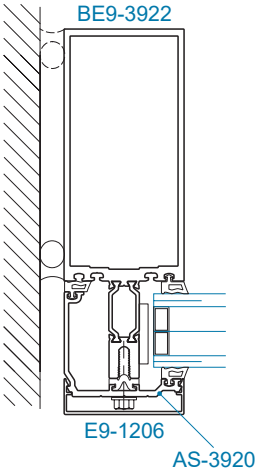


SECTION 4
JAMB

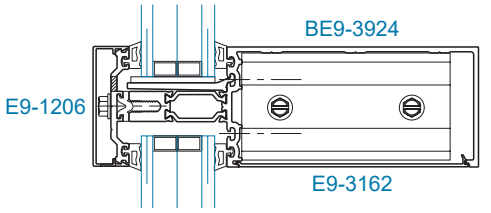


SECTION 2A
OPEN BACK HORIZONTAL

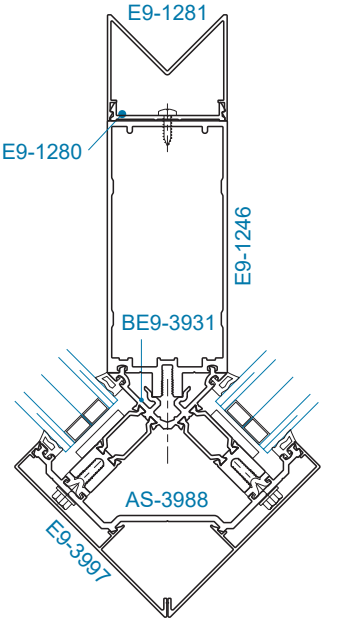

SECTION 6
90° OUTSIDE CORNER

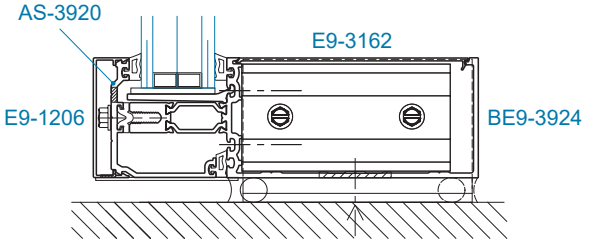


SECTION 3
OPEN BACK SILL

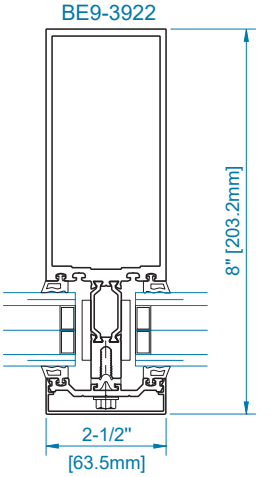


SECTION 5
VERTICAL

SCALE: 1/4 SIZE
0 3 6


OPTIONAL FRAMING MEMBERS FOR 1-1/2" GLAZING

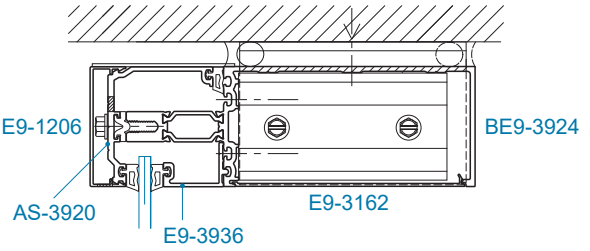


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

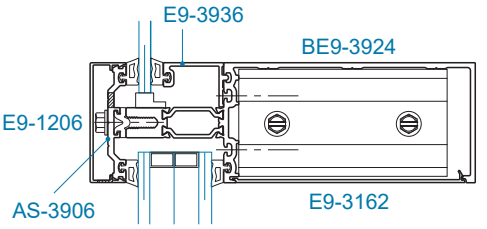


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

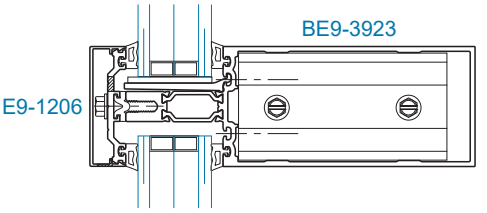


SECTION 2A
HORIZONTAL

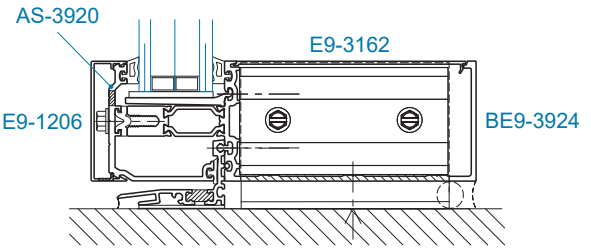


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

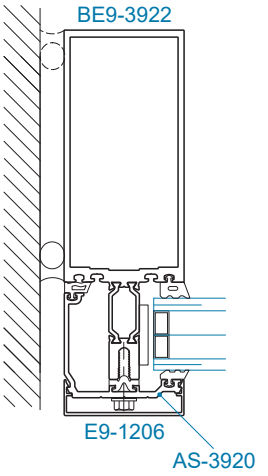


SECTION 4
JAMB

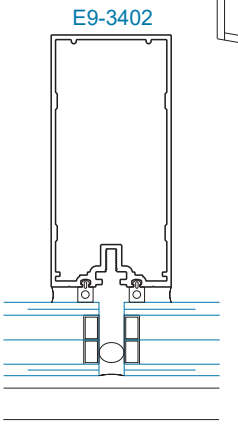


SECTION 5A
SSG VERTICAL

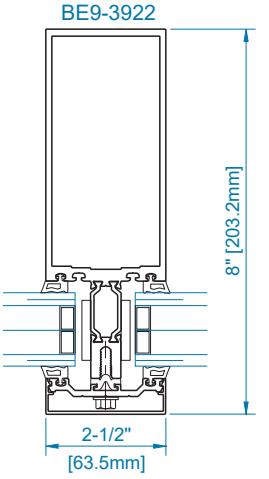

SECTION 5
VERTICAL

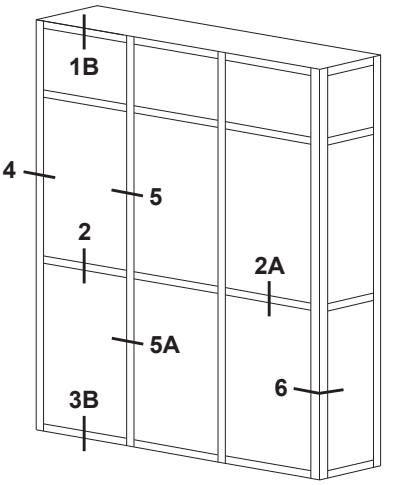


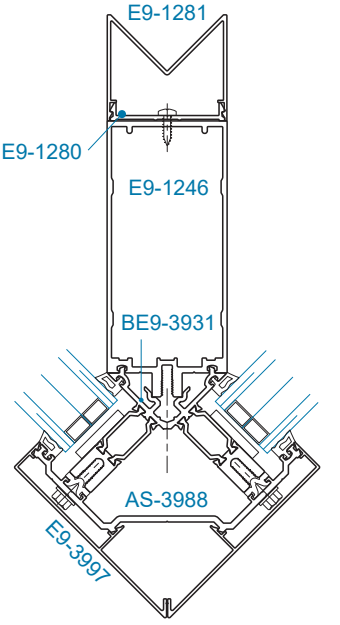


SECTION 6
90° OUTSIDE CORNER

SCALE: 1/4 SIZE
0 3 6


STANDARD FRAMING MEMBERS FOR 1-1/2" GLAZING

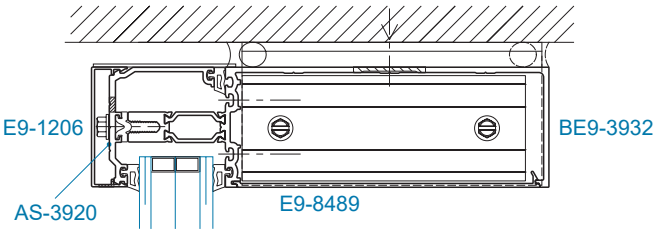


SECTION 1
OPEN BACK HEAD

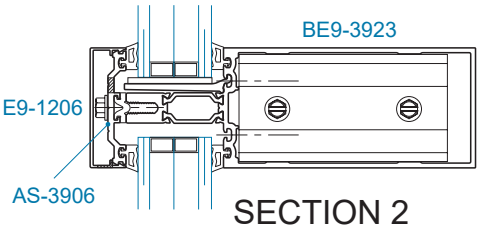


SECTION 2
HORIZONTAL

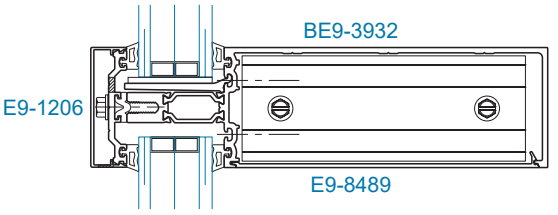


SECTION 2A
OPEN BACK HORIZONTAL

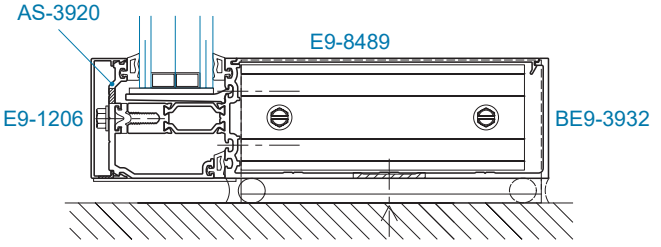


SECTION 3
OPEN BACK SILL

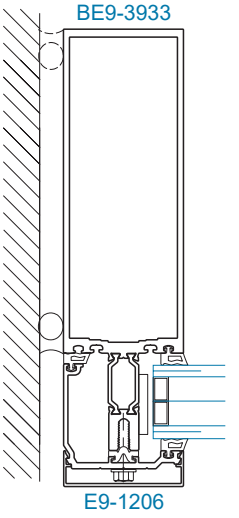


SECTION 4
JAMB

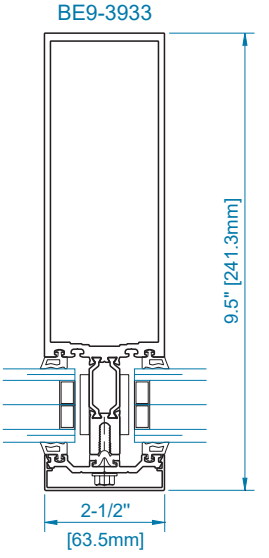

SECTION 5
VERTICAL

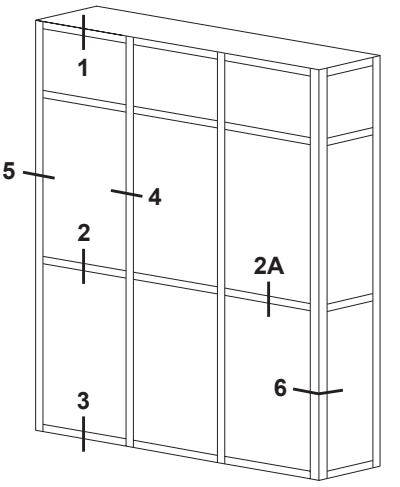


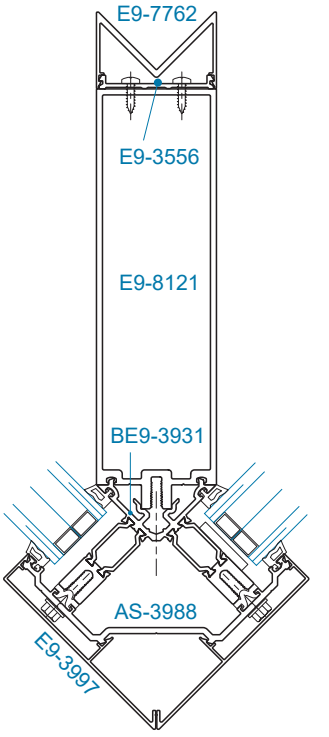


SECTION 6
90° OUTSIDE CORNER

SCALE: 1/4 SIZE
0 3 6


OPTIONAL FRAMING MEMBERS FOR 1-1/2" GLAZING

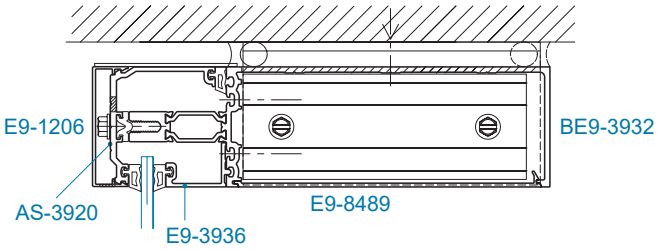


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

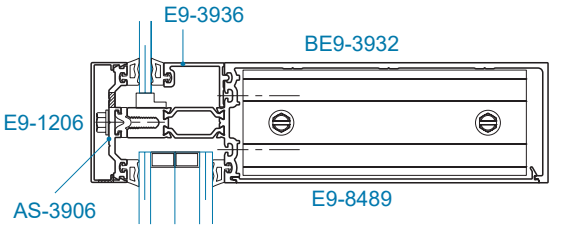


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

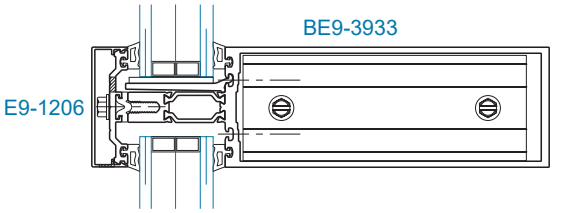


SECTION 2A
HORIZONTAL

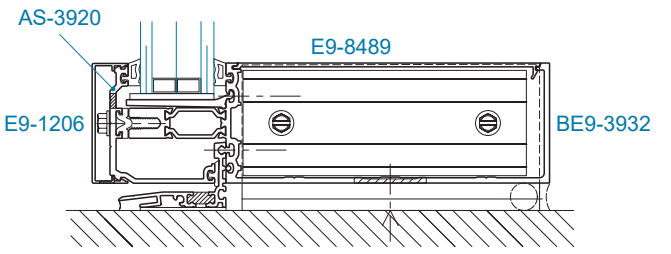


SECTION 3B
SILL w/ OPTIONAL SILL FLASHING

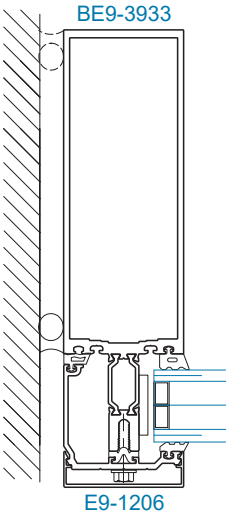


SECTION 4
JAMB

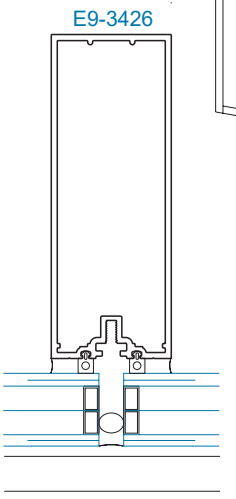


SECTION 5A
SSG VERTICAL

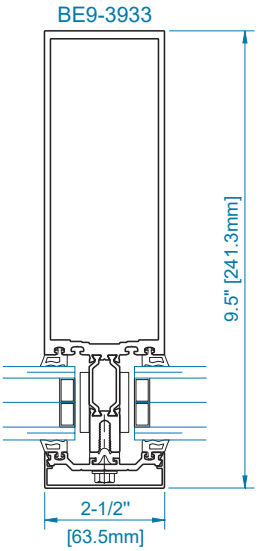

SECTION 5
VERTICAL

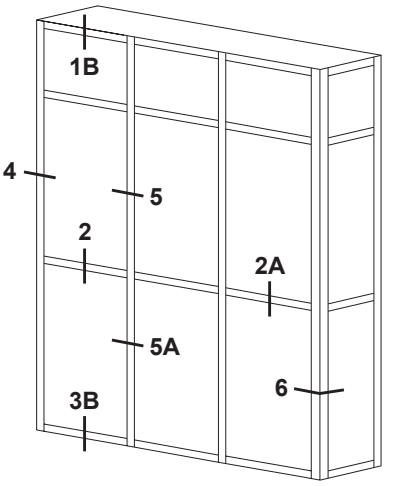


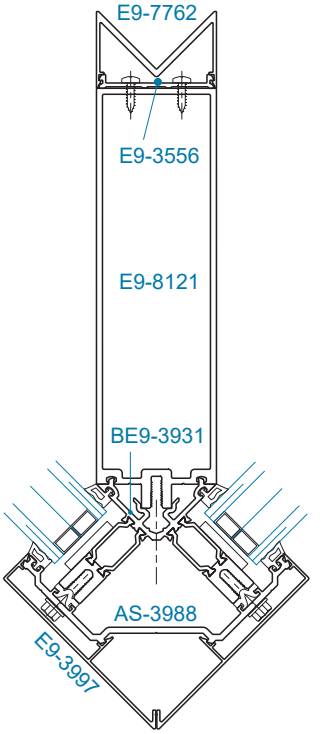


SECTION 6
90° OUTSIDE CORNER


SCALE: 1/4 SIZE
0 3 6

35T DOOR FRAMING MEMBERS FOR 1-1/2" GLAZING

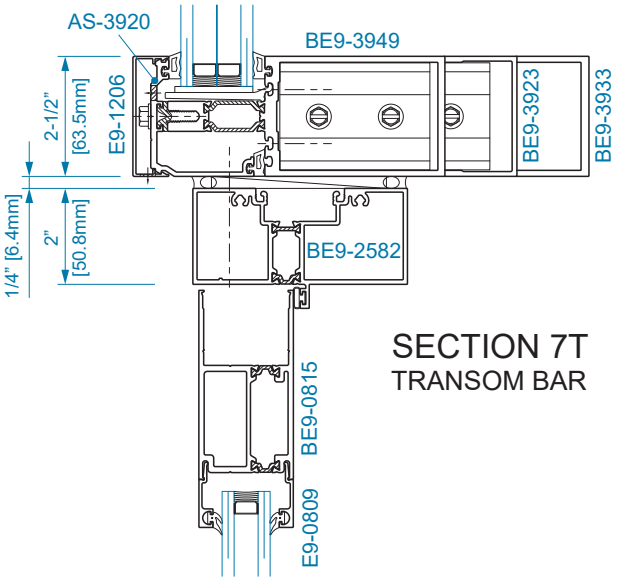


SECTION 7T
TRANSOM BAR

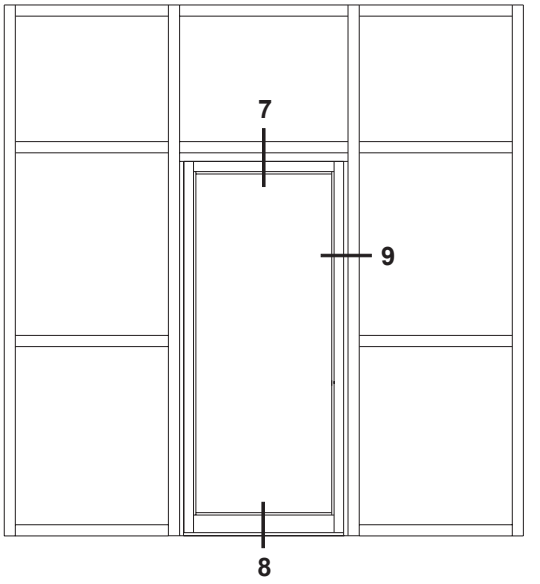

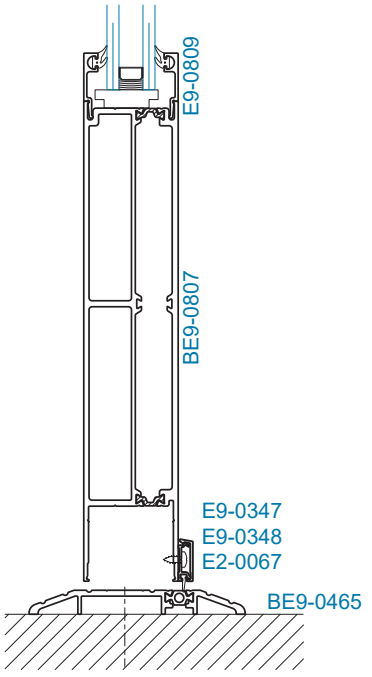


SECTION 8T

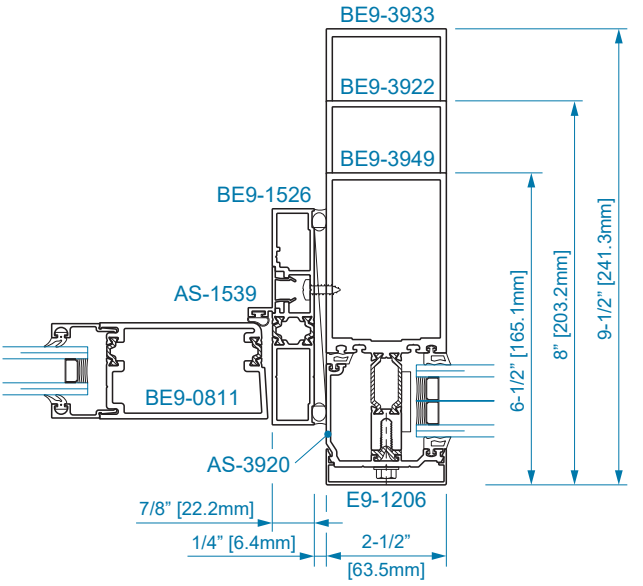


SECTION 9T
DOOR JAMB


SCALE: 1/4 SIZE
0 3 6

STANDARD FRAMING MEMBERS FOR 1-3/4" GLAZING

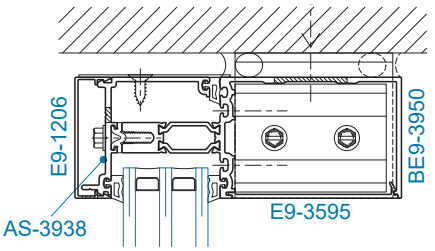


SECTION 1
OPEN BACK HEAD

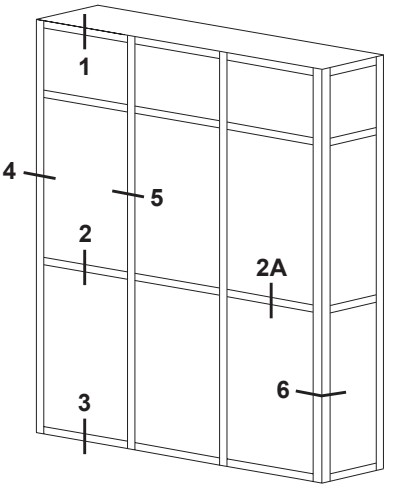


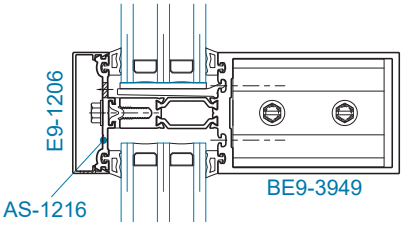


SECTION 2
HORIZONTAL

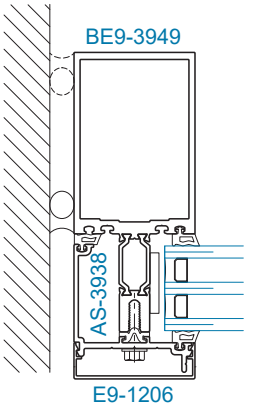


SECTION 4
JAMB

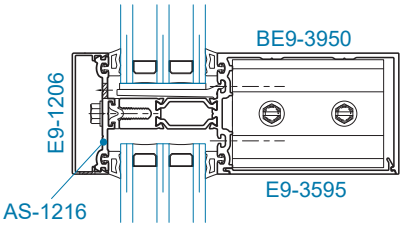


SECTION 2A
OPEN BACK HORIZONTAL

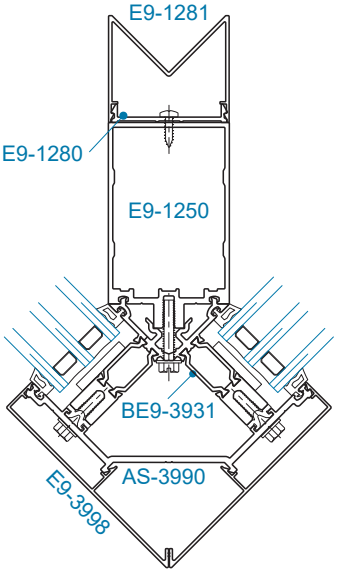

SECTION 6
90° OUTSIDE CORNER

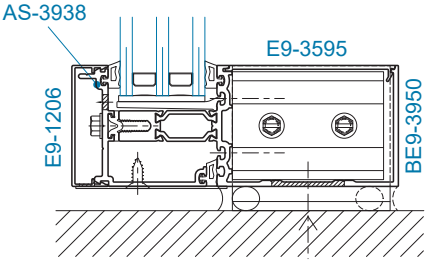


SECTION 3
OPEN BACK SILL

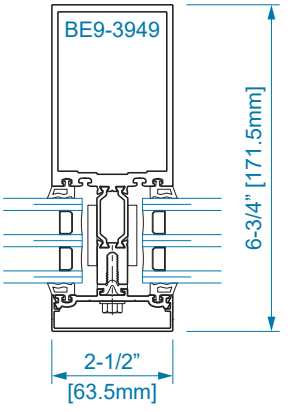


SECTION 5
VERTICAL


SCALE: 1/4 SIZE
0 3 6

OPTIONAL FRAMING MEMBERS FOR 1-3/4" GLAZING

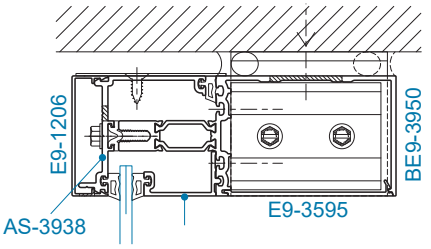


SECTION 1B
OPTIONAL HEAD
(1/4" GI.)

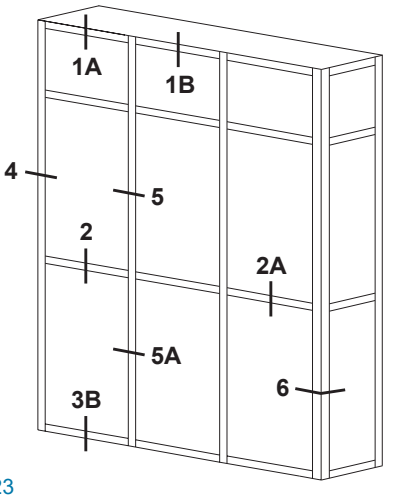


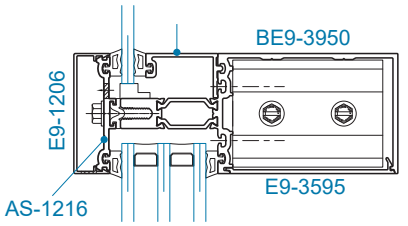


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1"GI.)

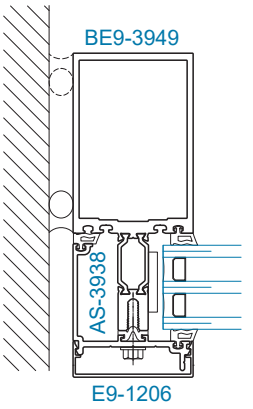


SECTION 4
JAMB

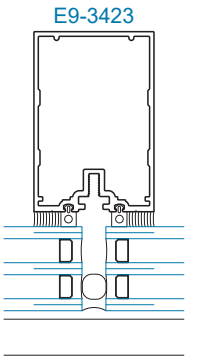


SECTION 5A
SSG VERTICAL

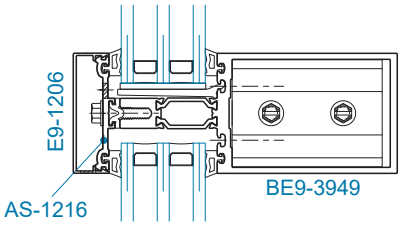


SECTION 2A
HORIZONTAL

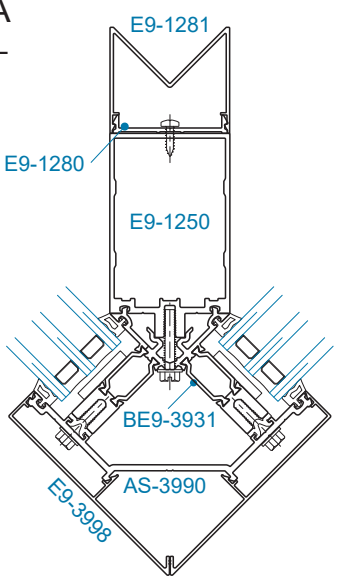

SECTION 6
90° OUTSIDE CORNER

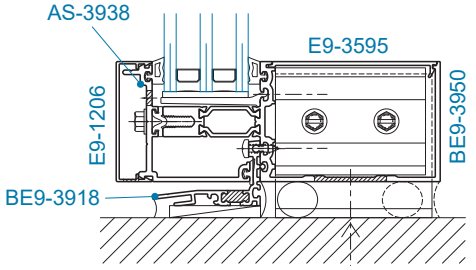


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

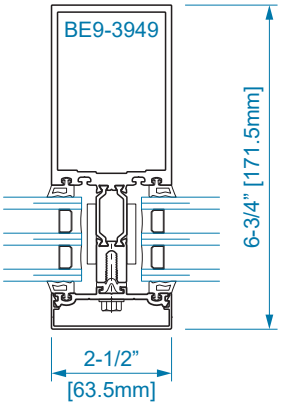


SECTION 5
VERTICAL


SCALE: 1/4 SIZE
0 3 6

STANDARD FRAMING MEMBERS FOR 1-3/4" GLAZING

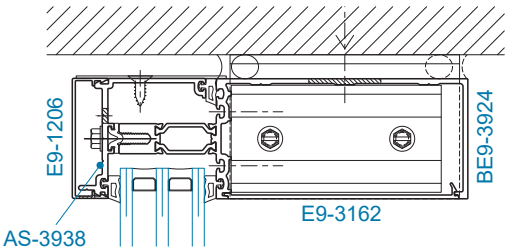


SECTION 1
OPEN BACK HEAD

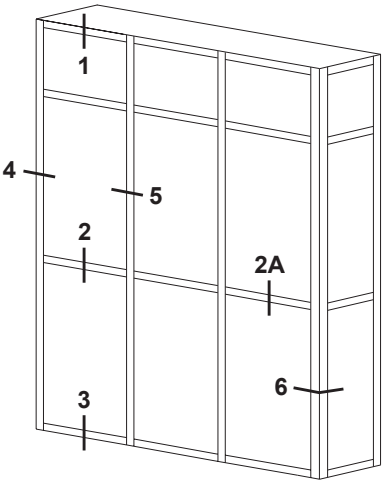


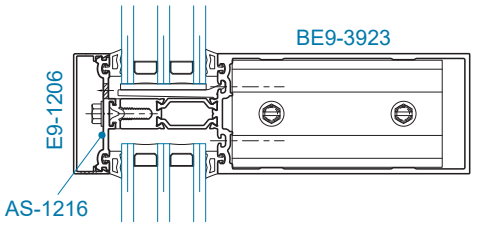


SECTION 2
HORIZONTAL

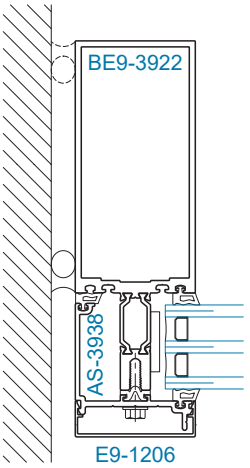


SECTION 4
JAMB

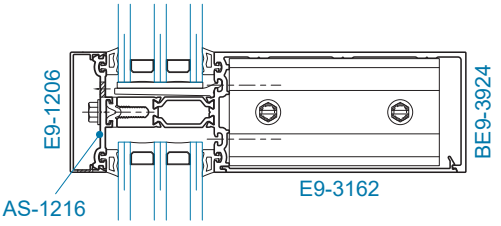


SECTION 2A
OPEN BACK HORIZONTAL

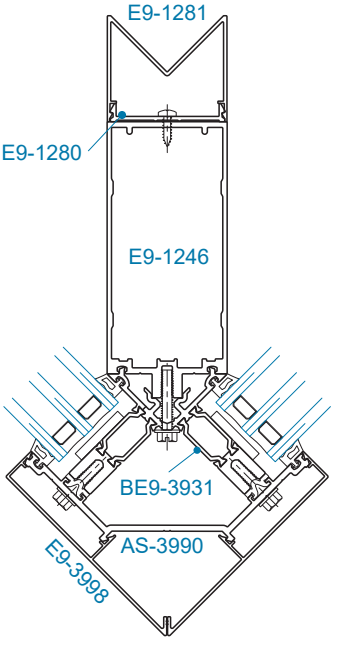

SECTION 6
90° OUTSIDE CORNER

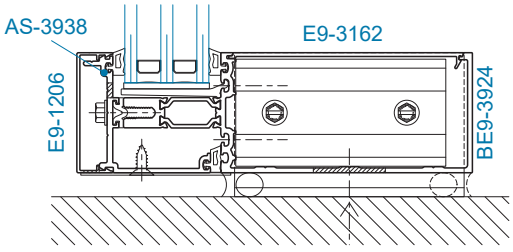


SECTION 3
OPEN BACK SILL

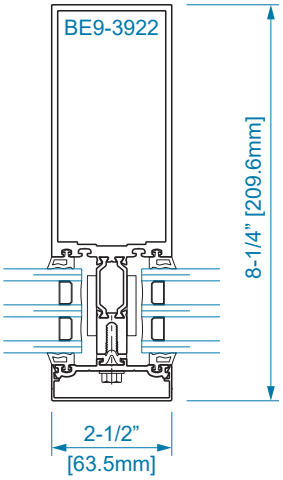


SECTION 5
VERTICAL


SCALE: 1/4 SIZE




OPTIONAL FRAMING MEMBERS FOR 1-3/4" GLAZING

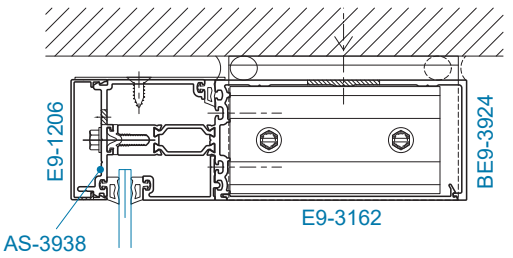


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

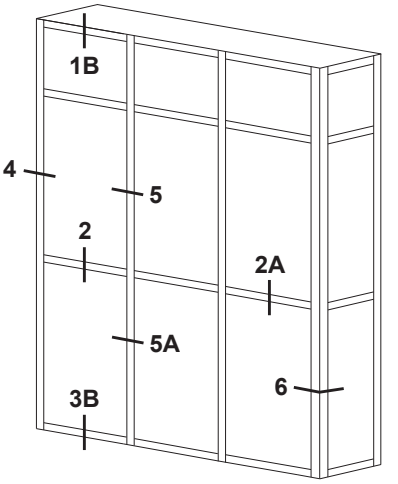


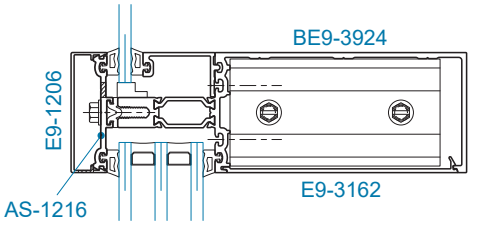


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

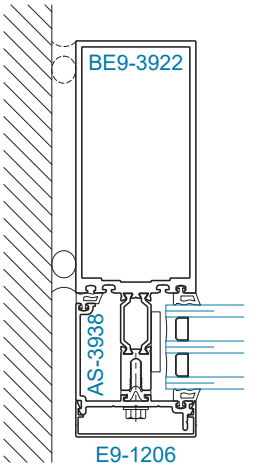


SECTION 4
JAMB

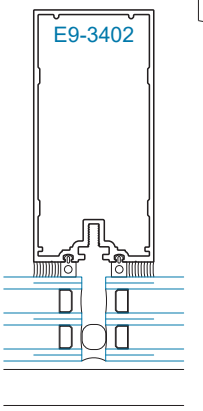


SECTION 5A
SSG VERTICAL

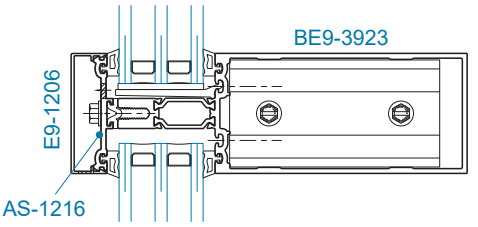


SECTION 2A
HORIZONTAL

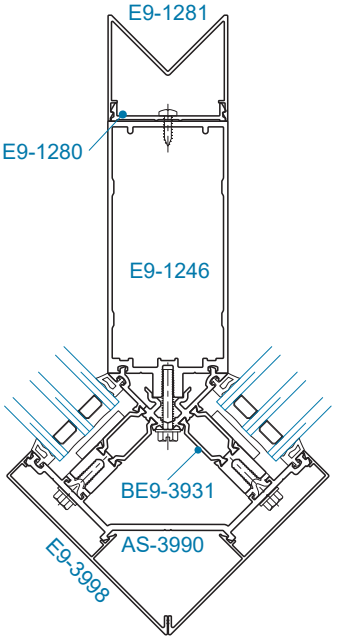

SECTION 6
90° OUTSIDE CORNER

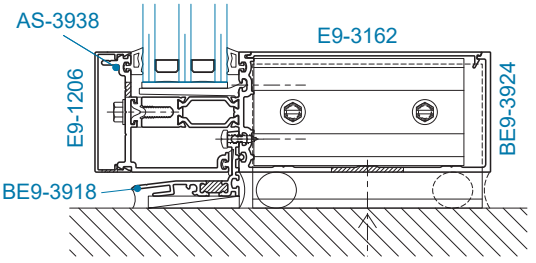


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

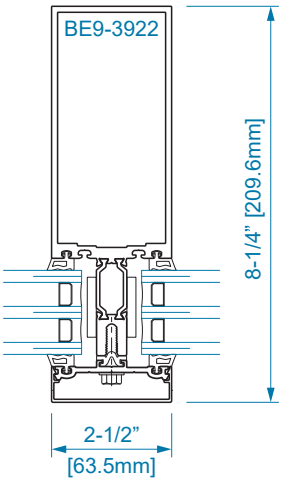


SECTION 5
VERTICAL


SCALE: 1/4 SIZE
0 3 6

STANDARD FRAMING MEMBERS FOR 1-3/4" GLAZING

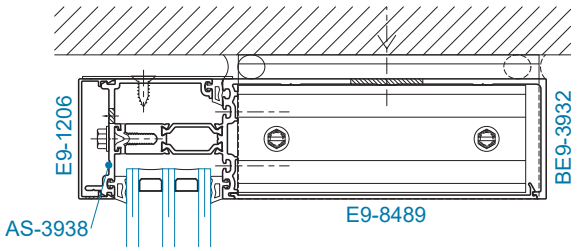


SECTION 1
OPEN BACK HEAD

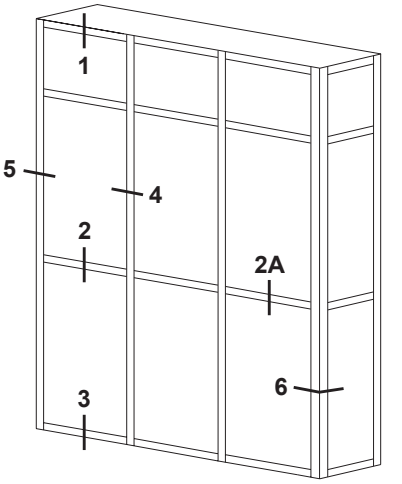


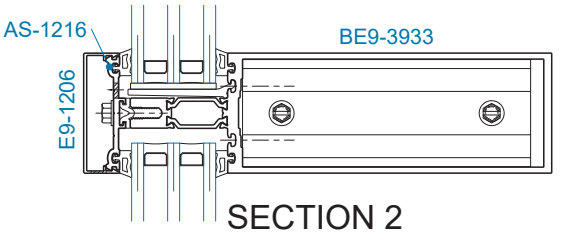


SECTION 2
HORIZONTAL

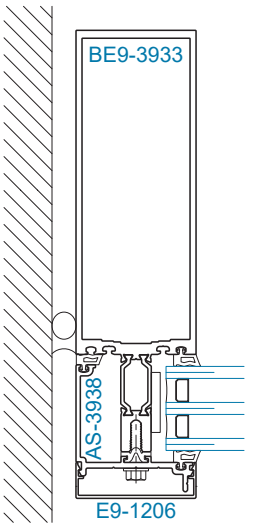


SECTION 4
JAMB

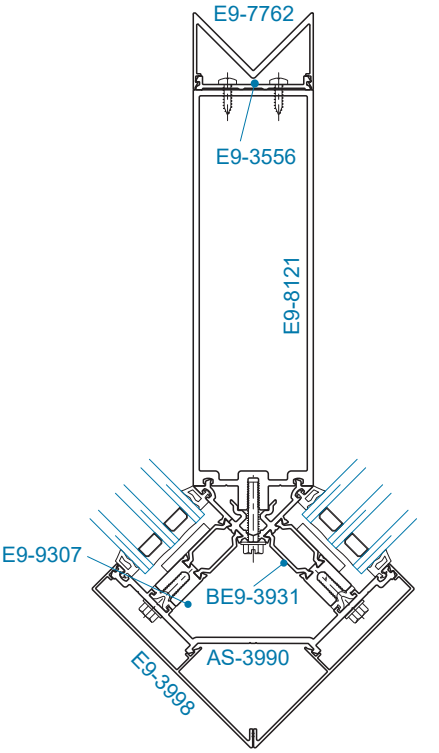


SECTION 6
90° OUTSIDE CORNER

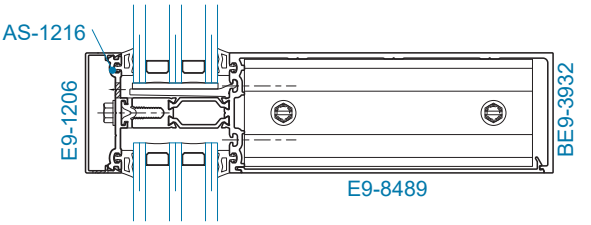


SECTION 2A
OPEN BACK HORIZONTAL

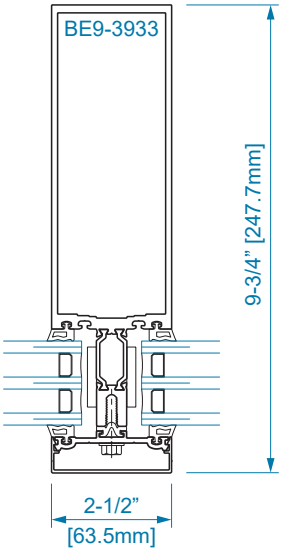


SECTION 5
VERTICAL

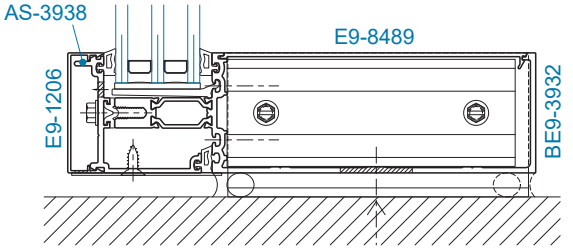


SECTION 3
OPEN BACK SILL




OPTIONAL FRAMING MEMBERS FOR 1-3/4" GLAZING

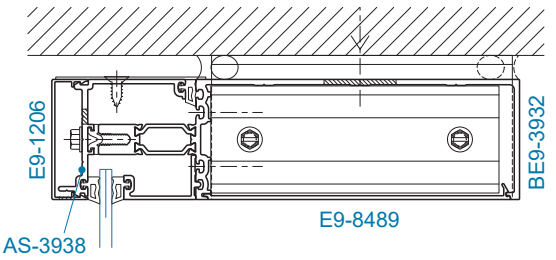


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

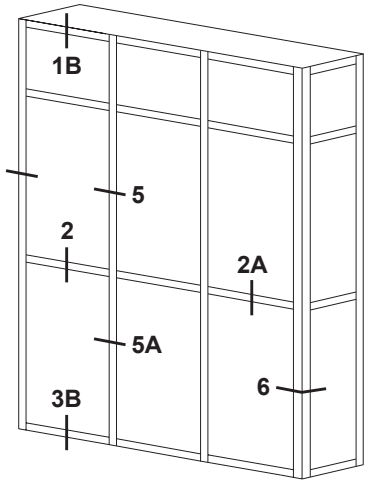


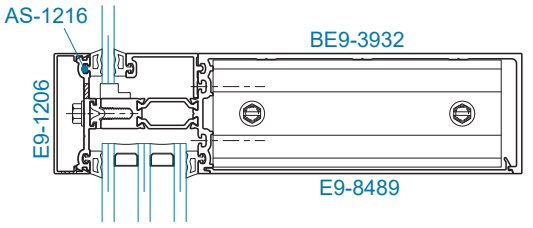


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

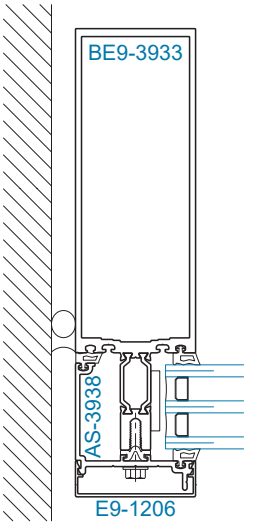


SECTION 4
JAMB

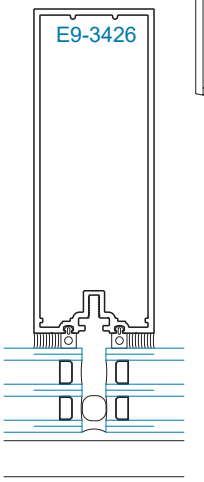


SECTION 5A
SSG VERTICAL

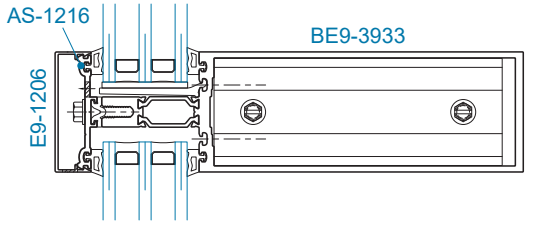


SECTION 2A
HORIZONTAL

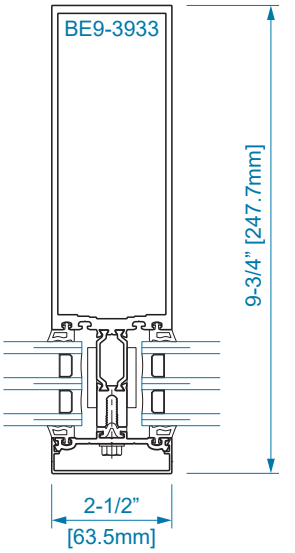

SECTION 5
VERTICAL

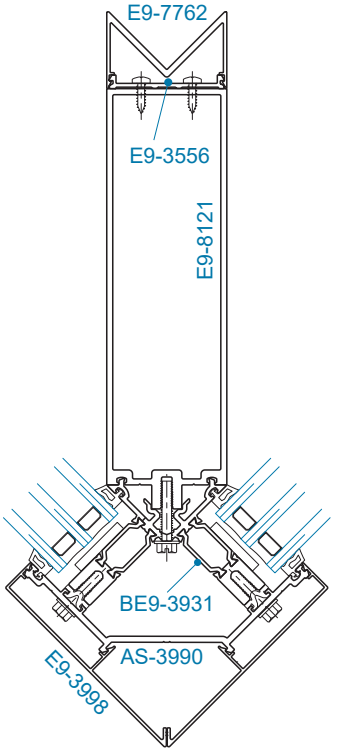


SECTION 6
90° OUTSIDE CORNER

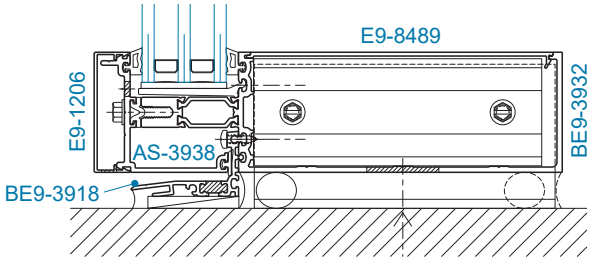


SECTION 3B
SILL w/ OPTIONAL SILL FLASHING


SCALE: 1/4 SIZE
0 3 6

35T DOOR FRAMING MEMBERS FOR 1-3/4" GLAZING

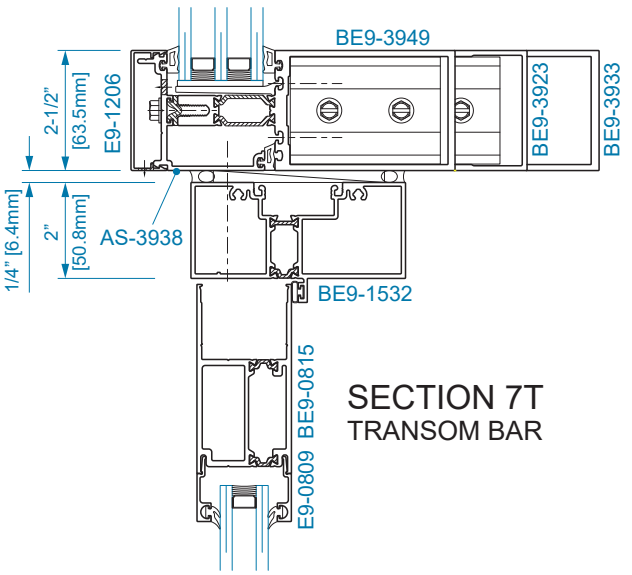


SECTION 7T
TRANSOM BAR

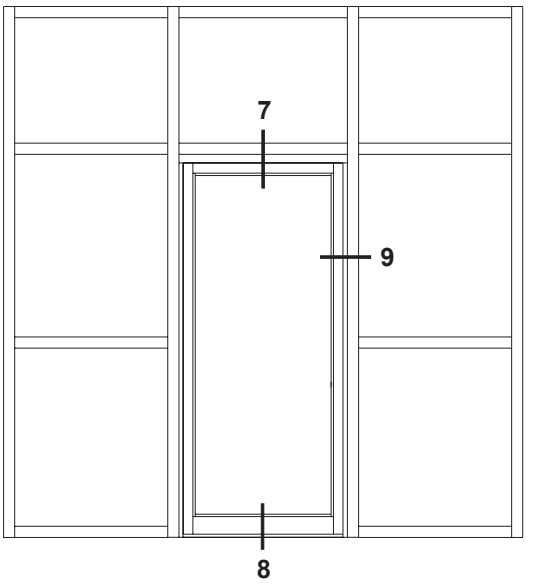

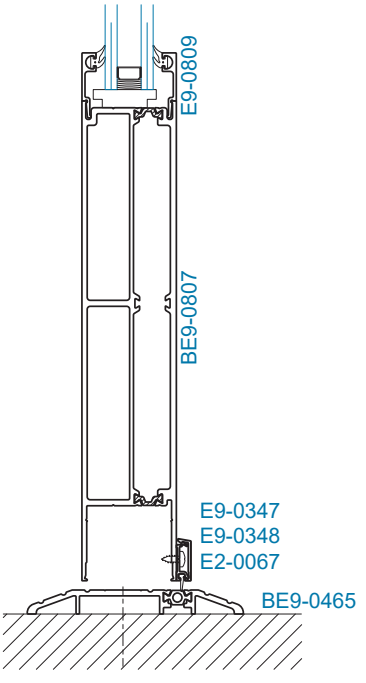


SECTION 8T

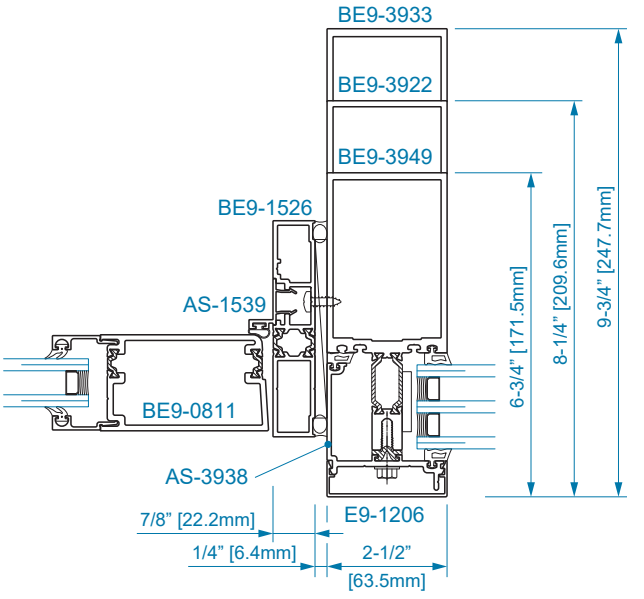


SECTION 9T
DOOR JAMB


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 2" GLAZING

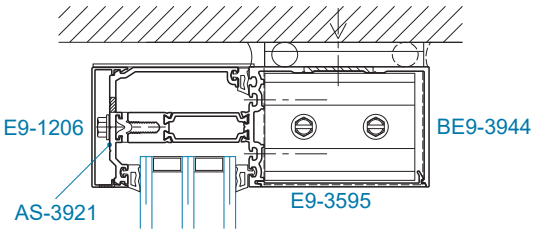


SECTION 1
OPEN BACK HEAD

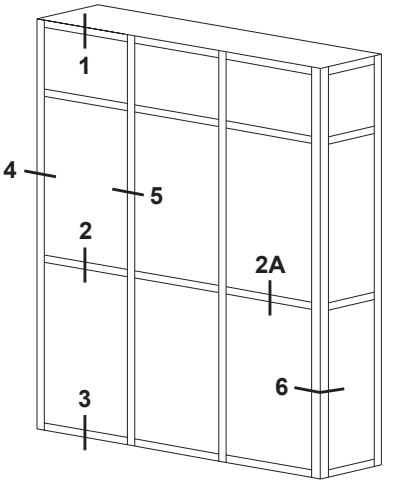


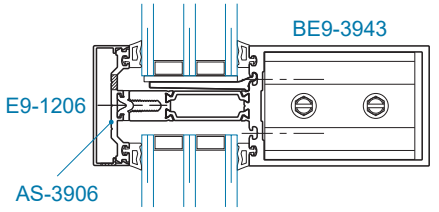


SECTION 2
HORIZONTAL

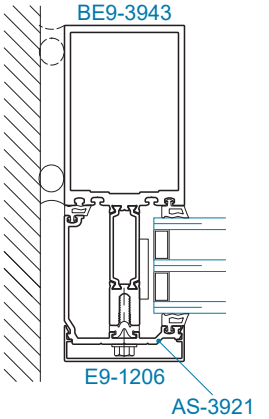


SECTION 4
JAMB

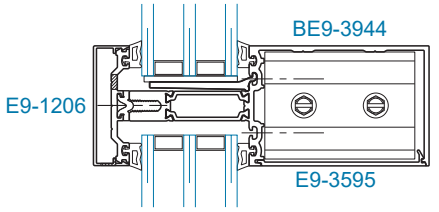


SECTION 2A
OPEN BACK HORIZONTAL

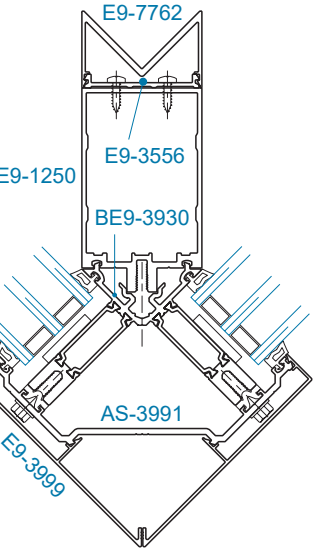

SECTION 6
90° OUTSIDE CORNER

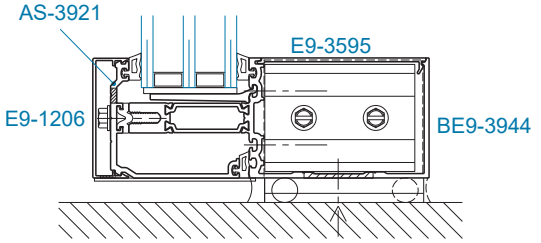


SECTION 3
OPEN BACK SILL

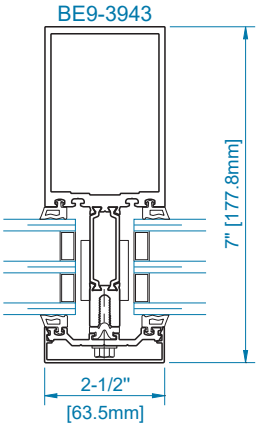


SECTION 5
VERTICAL


SCALE: 1/4 SIZE




OPTIONAL FRAMING MEMBERS FOR 2" GLAZING

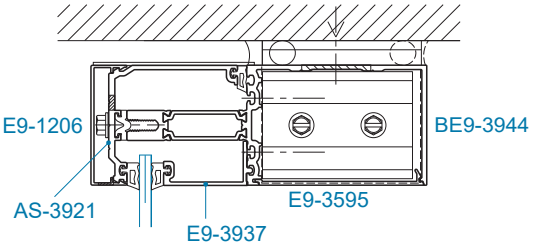


SECTION 1B
OPTIONAL HEAD
(1/4" GI.)

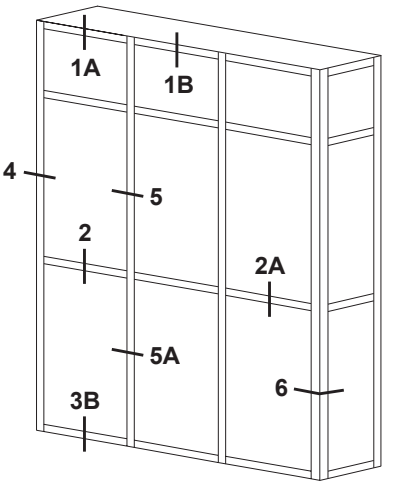


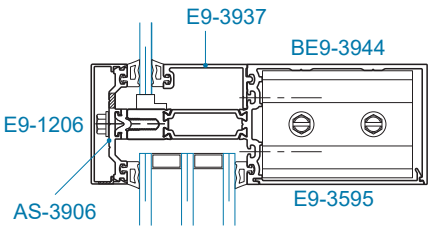


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1"GI.)

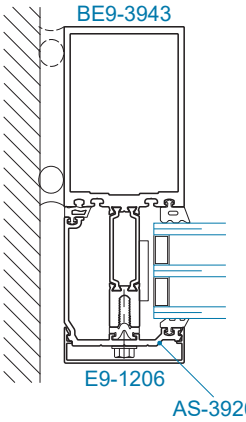


SECTION 4
JAMB

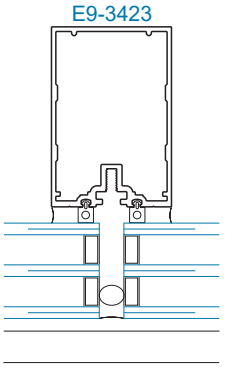


SECTION 5A
SSG VERTICAL

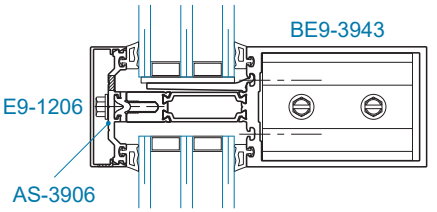


SECTION 2A
HORIZONTAL

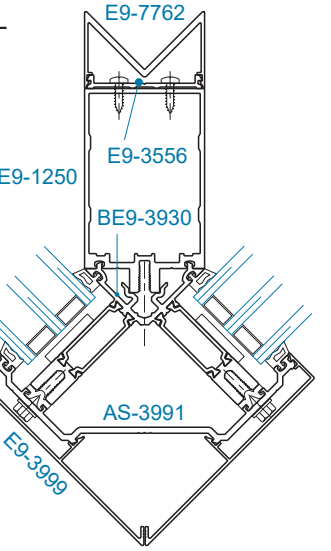

SECTION 6
90° OUTSIDE CORNER

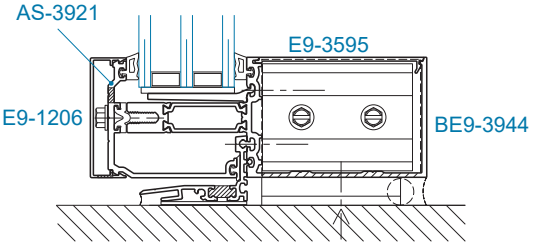


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

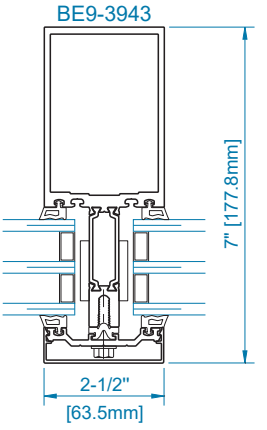


SECTION 5
VERTICAL


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 2" GLAZING

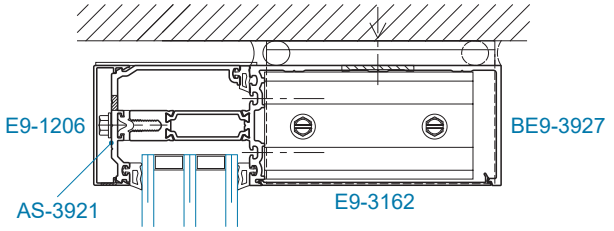


SECTION 1
OPEN BACK HEAD

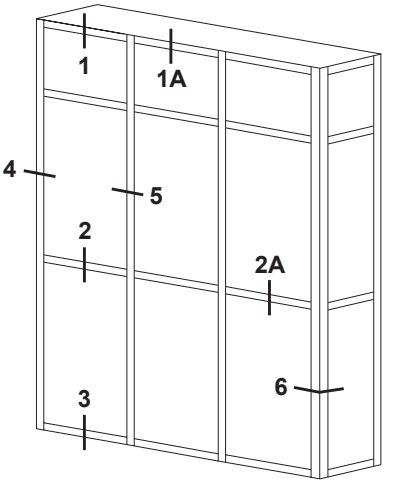


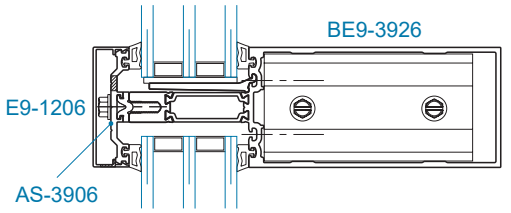


SECTION 2
HORIZONTAL

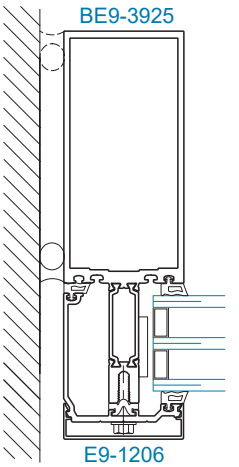


SECTION 4
JAMB

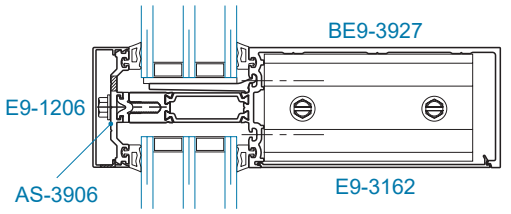


SECTION 2A
OPEN BACK HORIZONTAL

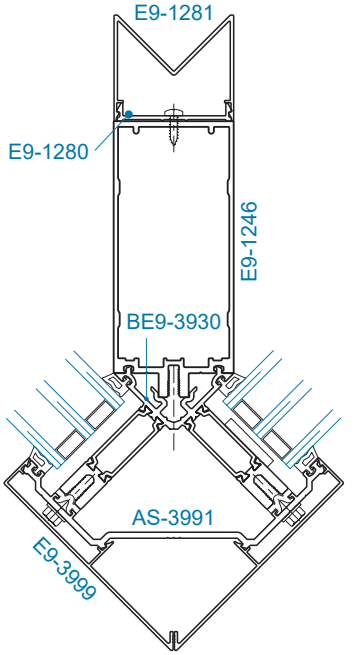

SECTION 6
90° OUTSIDE CORNER

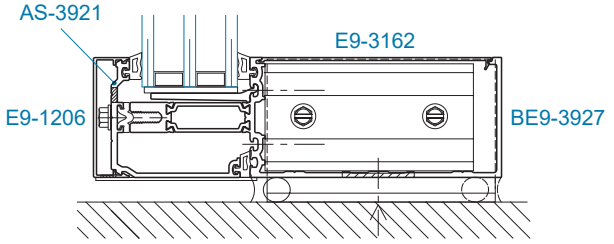


SECTION 3
OPEN BACK SILL

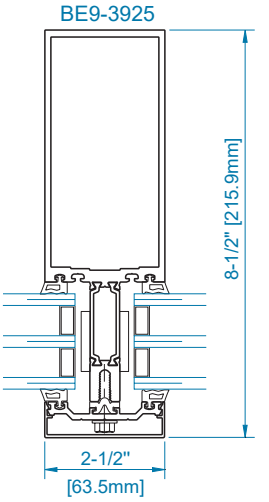


SECTION 5
VERTICAL


SCALE: 1/4 SIZE
0 3 6

OPTIONAL FRAMING MEMBERS FOR 2" GLAZING

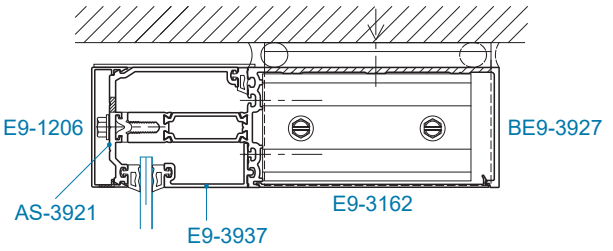


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

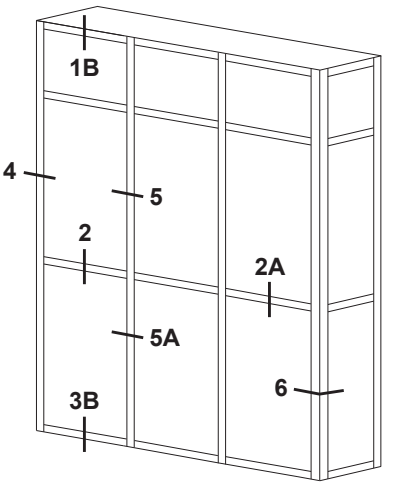


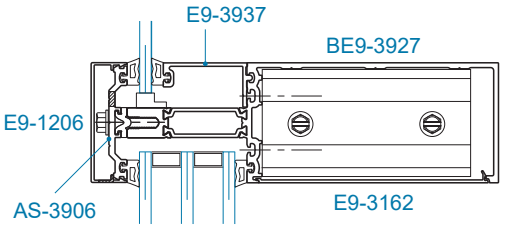


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

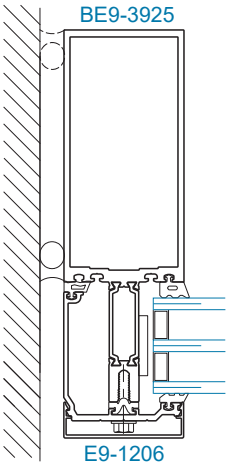


SECTION 4
JAMB

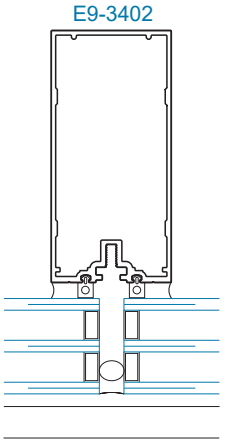


SECTION 5A
SSG VERTICAL

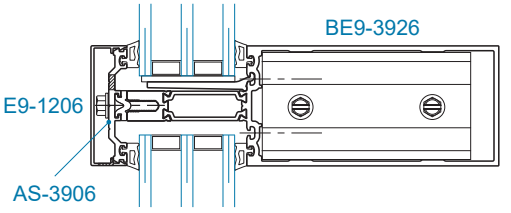


SECTION 2A
HORIZONTAL

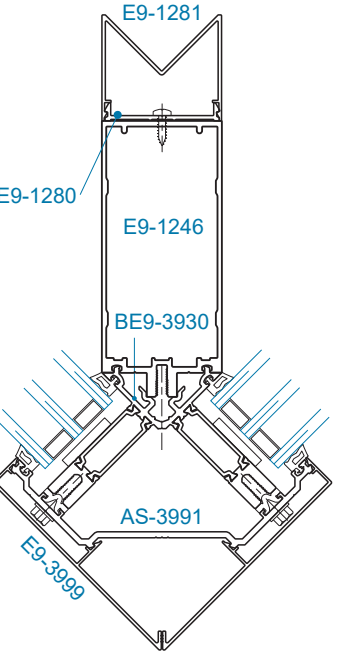

SECTION 6
90° OUTSIDE CORNER

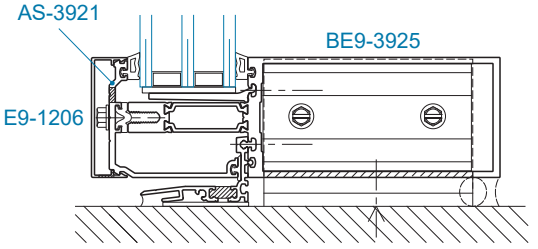


SECTION 3B
OPTIONAL SILL
w/ "J" ANCHOR AND SILL FLASHING

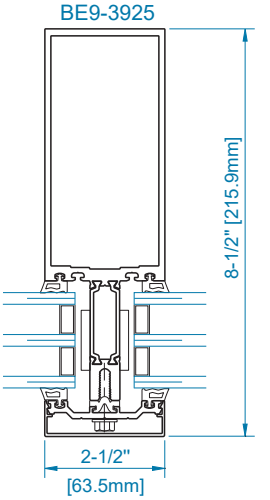


SECTION 5
VERTICAL

SCALE: 1/4 SIZE
0 3 6


STANDARD FRAMING MEMBERS FOR 2" GLAZING

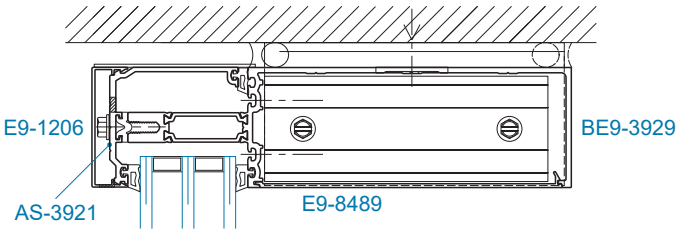


SECTION 1
OPEN BACK HEAD

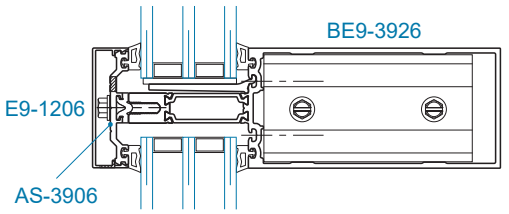


SECTION 2
HORIZONTAL

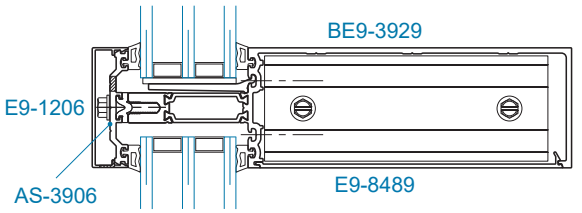


SECTION 2A
OPEN BACK HORIZONTAL

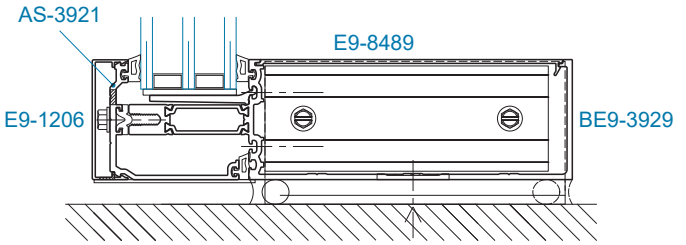


SECTION 3
OPEN BACK SILL

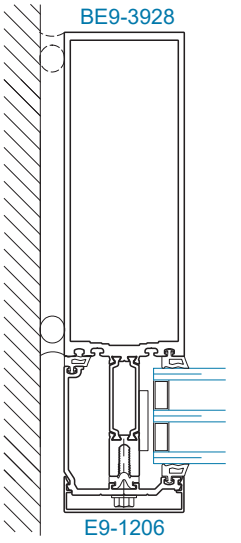


SECTION 4
JAMB

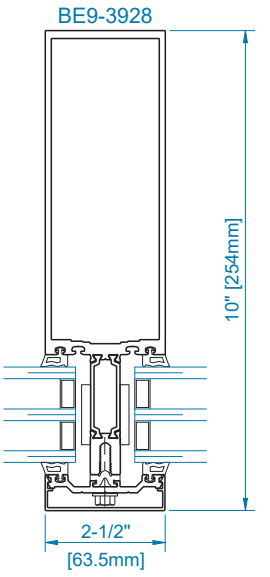

SECTION 5
VERTICAL

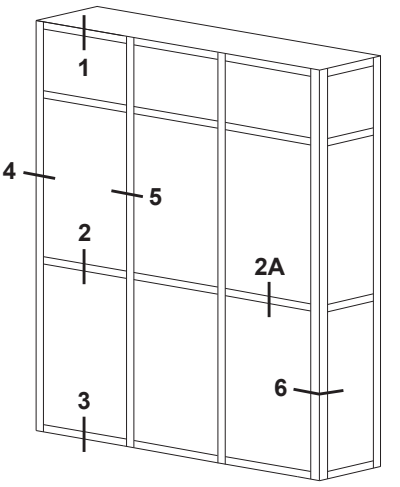


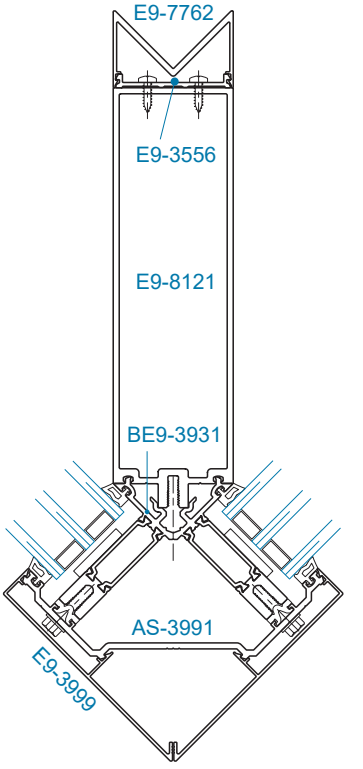


SECTION 6
90° OUTSIDE CORNER

SCALE: 1/4 SIZE
0 3 6


OPTIONAL FRAMING MEMBERS FOR 2" GLAZING

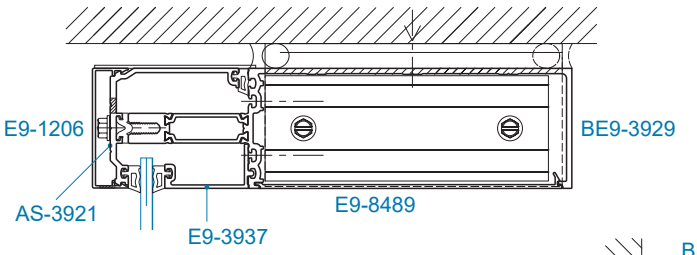


SECTION 1B
OPEN BACK HEAD
(1/4" GI.)

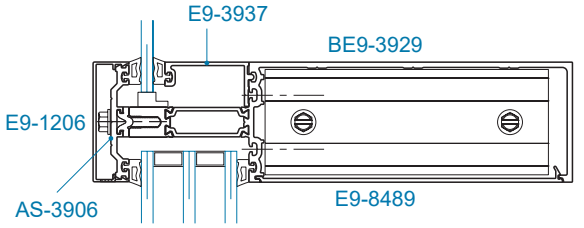


SECTION 2
OPEN BACK HORIZONTAL
(1/4" GI./1" GI.)

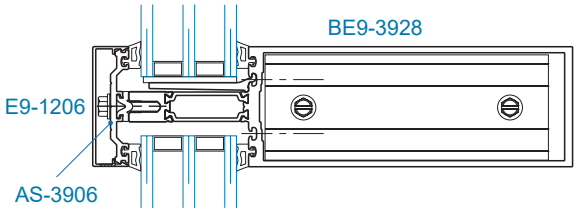


SECTION 2A
HORIZONTAL

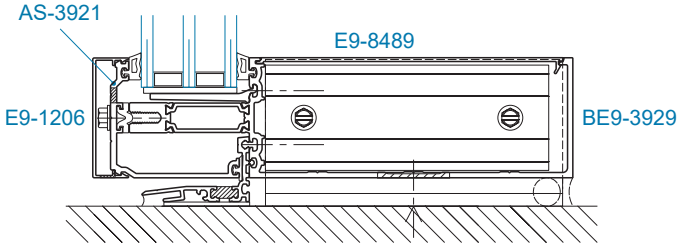


SECTION 3B
SILL w/ OPTIONAL SILL FLASHING

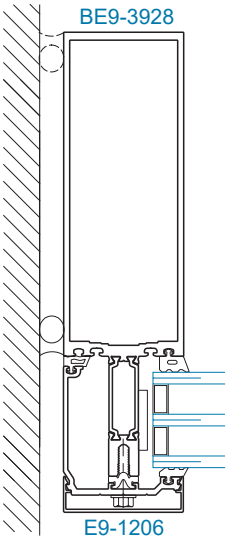


SECTION 4
JAMB

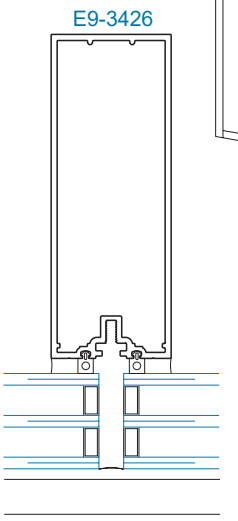


SECTION 5A
SSG VERTICAL

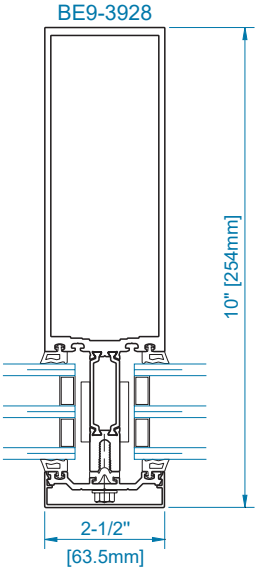

SECTION 5
VERTICAL

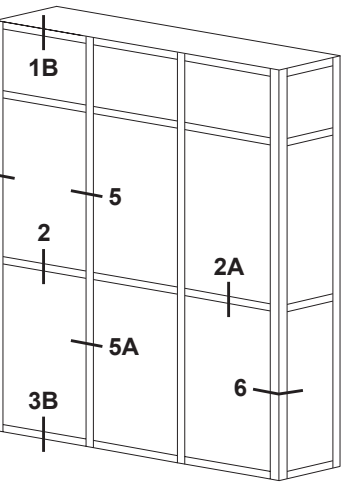


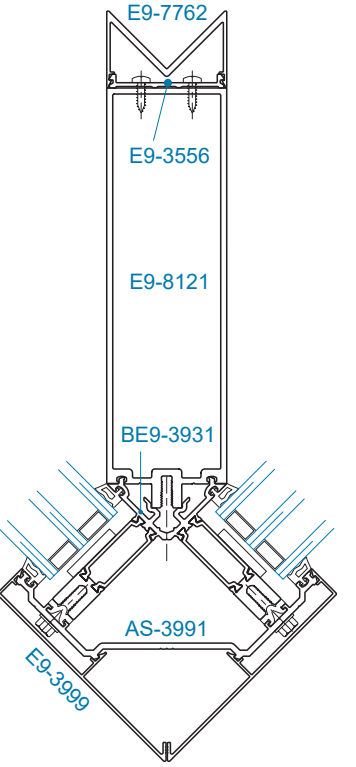


SECTION 6
90° OUTSIDE CORNER


SCALE: 1/4 SIZE
0 3 6

35T DOOR FRAMING MEMBERS FOR 2" GLAZING

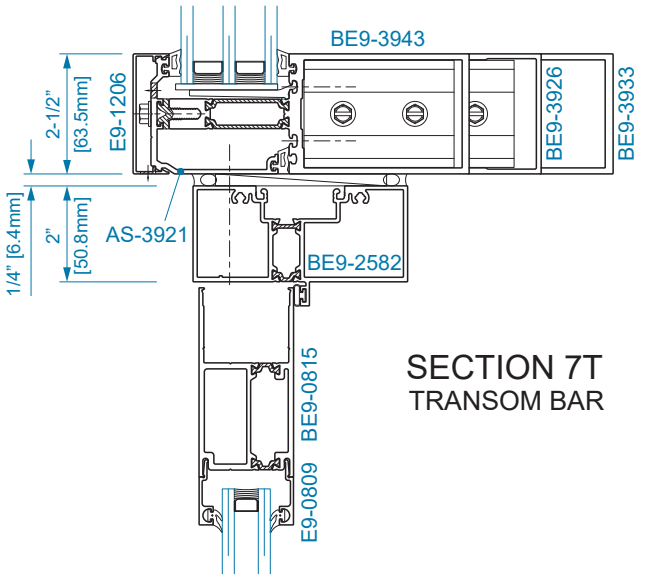


SECTION 7T
TRANSOM BAR

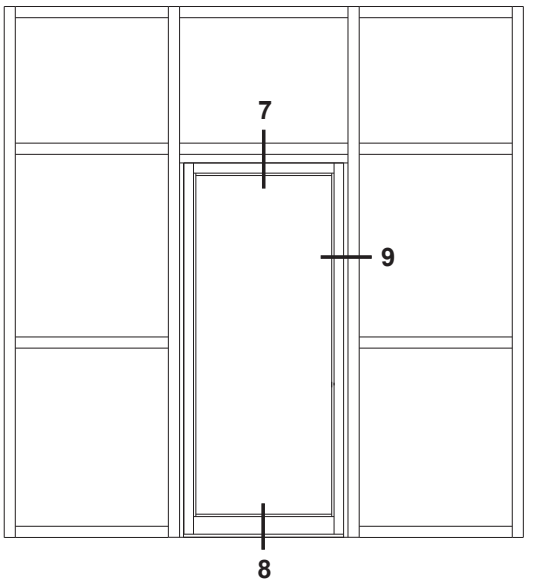

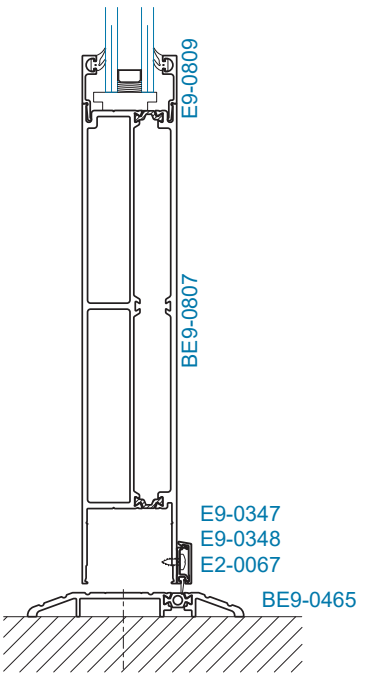


SECTION 8T

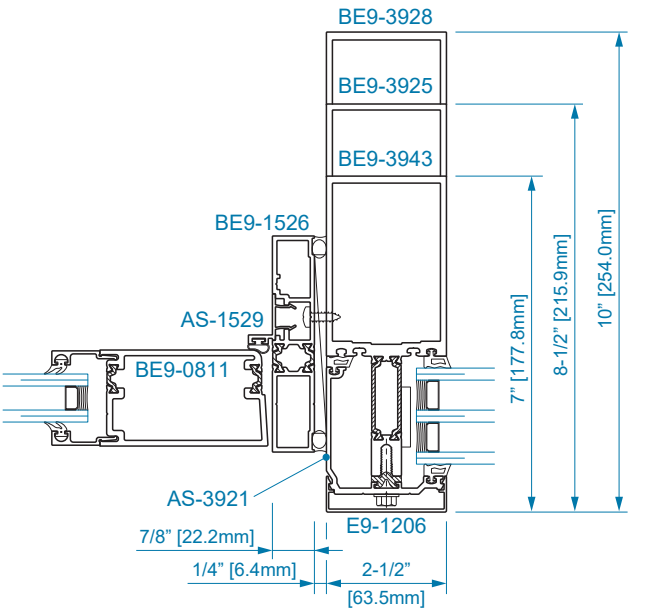

SECTION 9T
DOOR JAMB

SCALE: 1/4 SIZE




WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS


DEFLECTION CRITERIA AAMA TIR-A11 - L/175 or L/240 + 1/4" (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)
CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN 3/4" (19.1mm)

ALLOWABLE WIND LOAD STRESS
YKK AP tested standard. Contact YKK AP for more information.

These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span.
For other applications, please contact YKK AP engineers at 1-866-955-2732.


BE9-3942

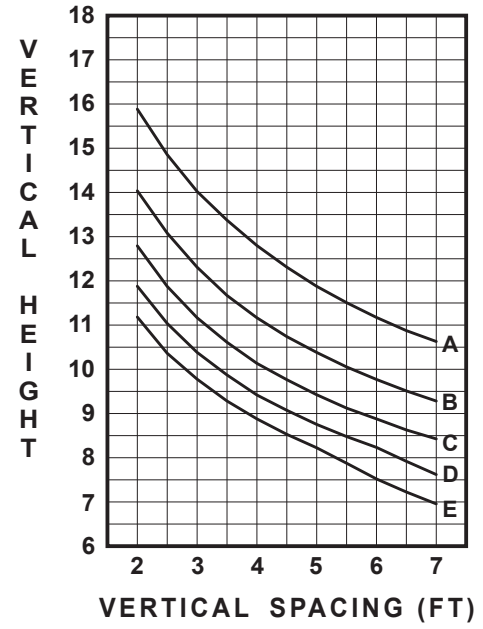





A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3942 / E1-0196

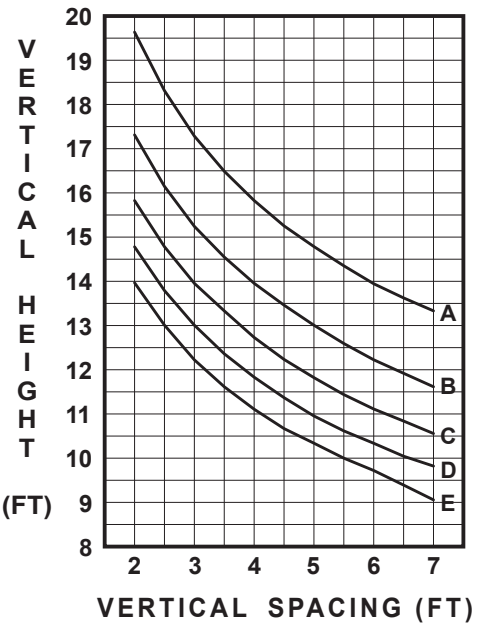


BE9-3942 / E1-0163

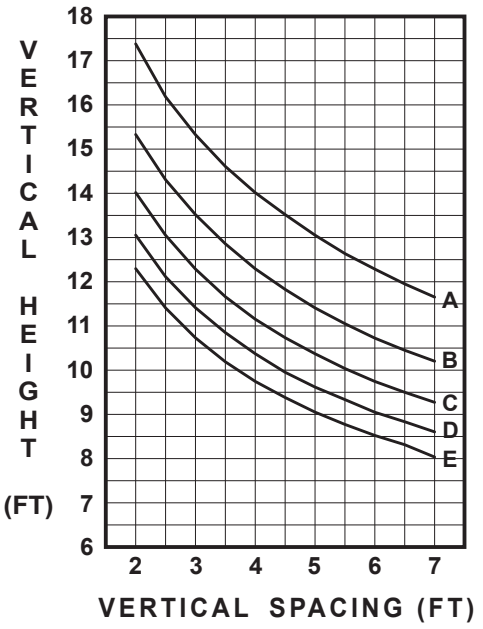

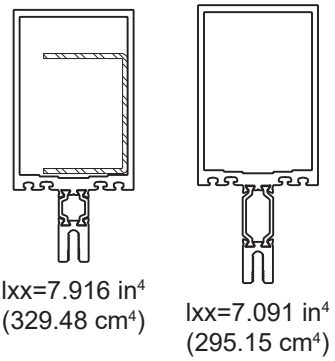



BE9-3916

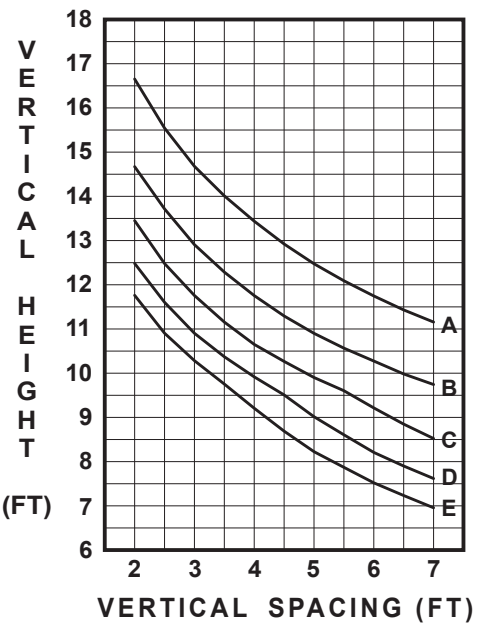

WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

BE9-3949 / E1-0196

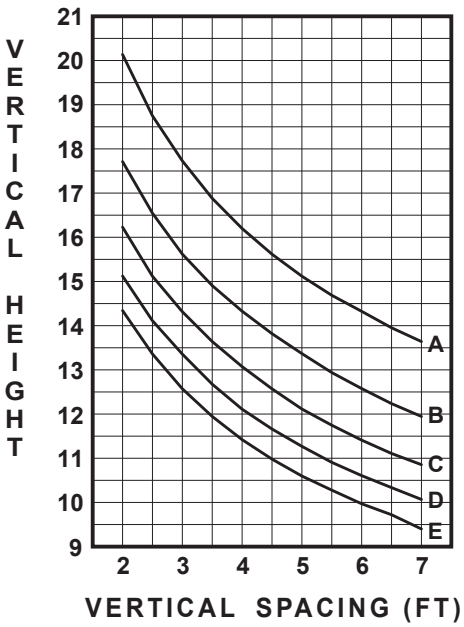




Ixx=11.715 in⁴ (487.61 cm⁴)


Ixx=6.382 in⁴ (265.64 cm⁴)


BE9-3949 / E1-0163

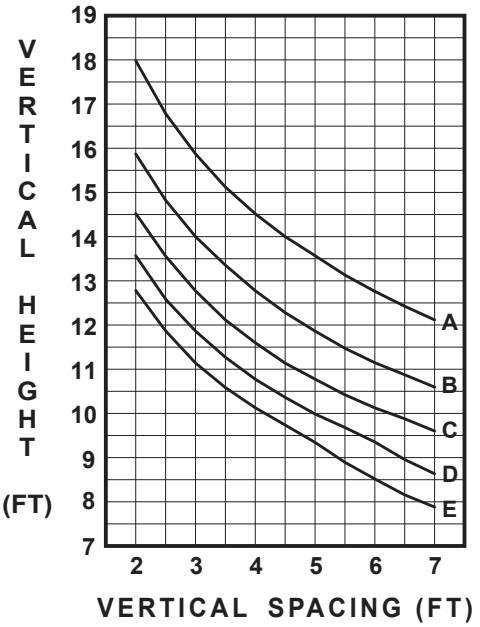

A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3943

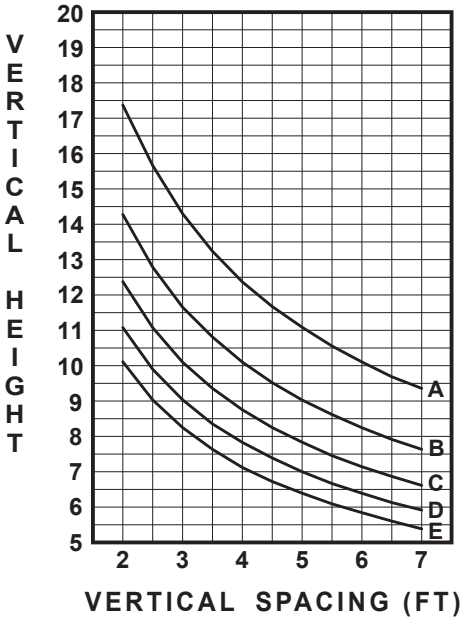




Ixx=8.118 in⁴ (337.90 cm⁴)


Ixx=13.454 in⁴ (560.00 cm⁴)


BE9-3943 / E1-0196

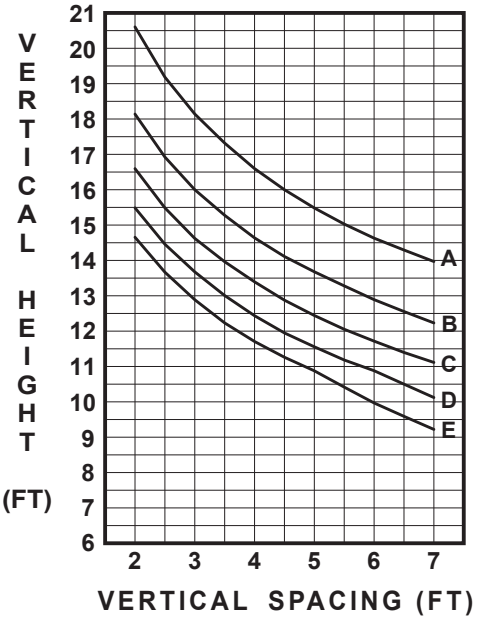


WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

BE9-3943 / E1-0163

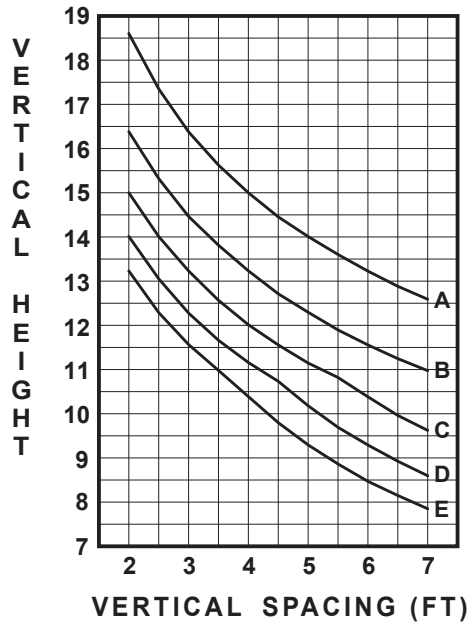





BE9-3901

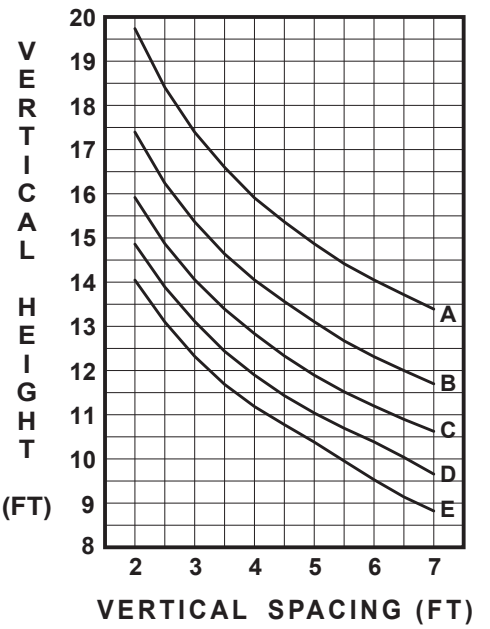


A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3901 / E1-0162

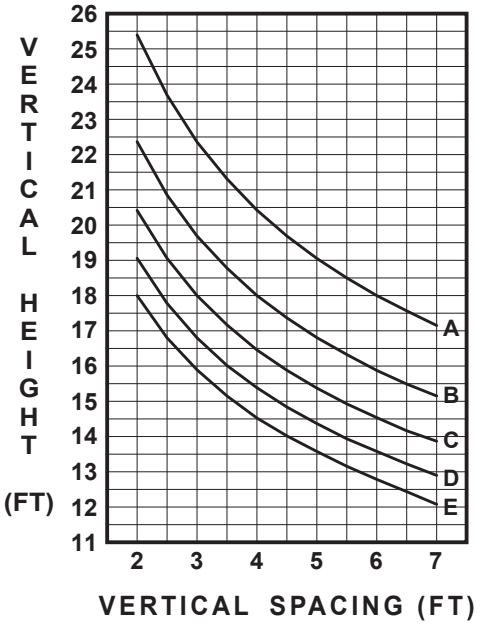





BE9-3901 / E1-0154

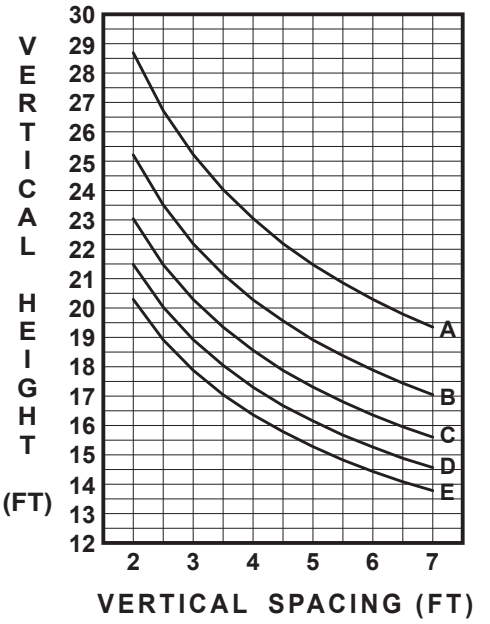


WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

BE9-3916

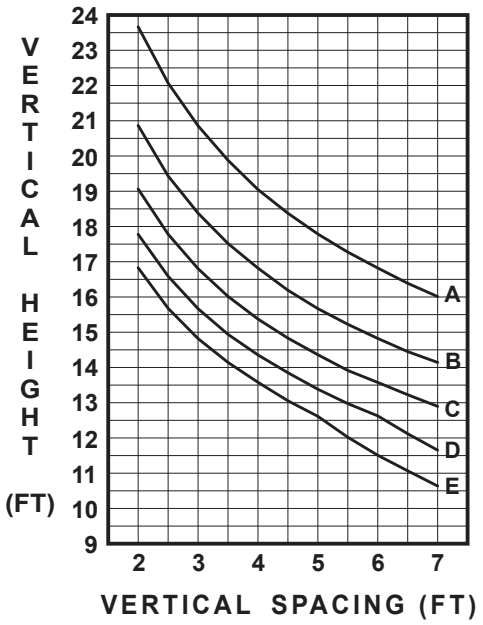

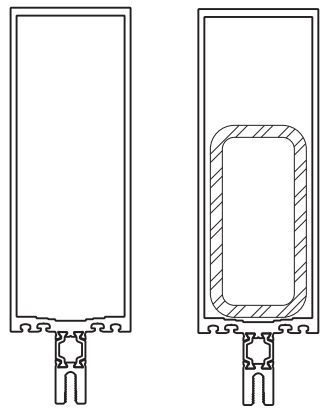



BE9-3916 / E1-0162

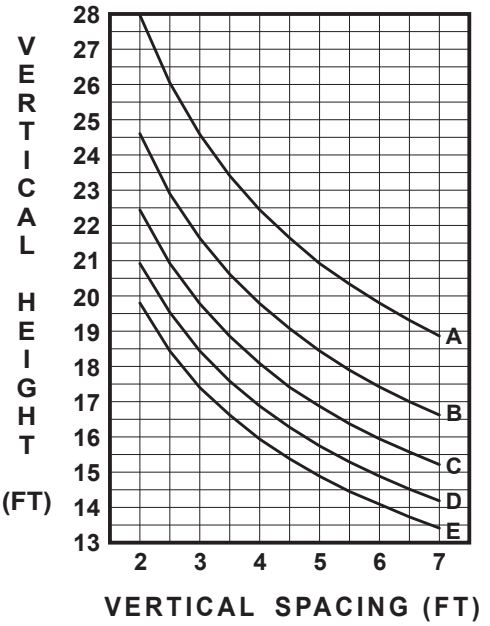


A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3916 / E1-0154

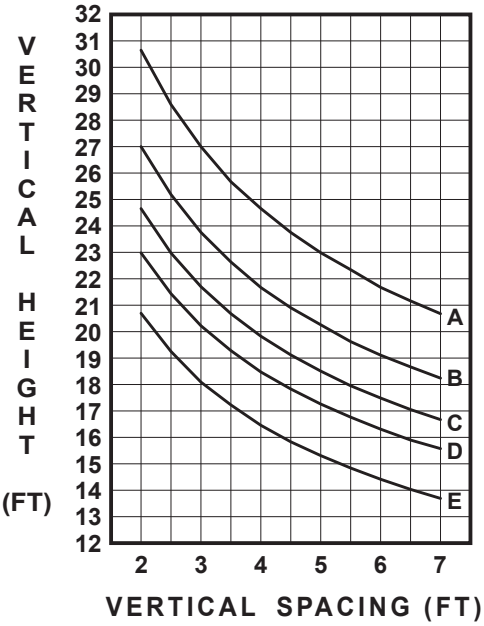

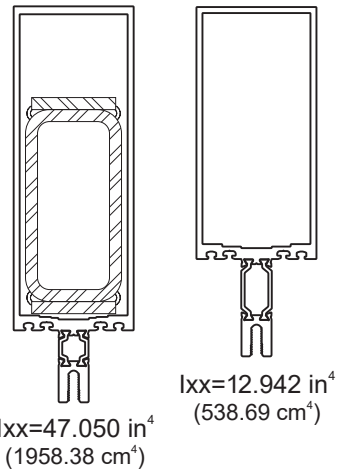



BE9-3922

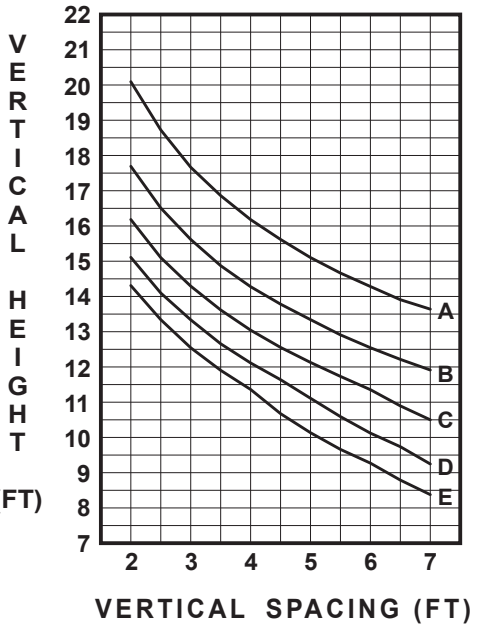

WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

BE9-3922 / E1-0162

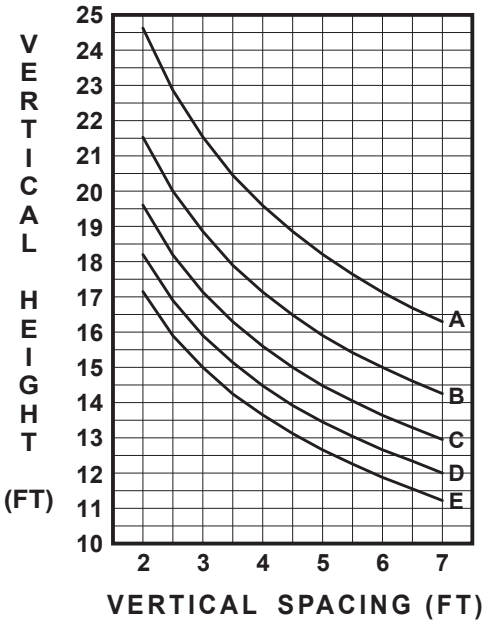


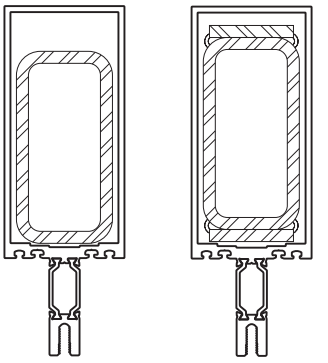

Ixx=26.555 in^4 (1105.29 cm^4)


Ixx=38.079 in^4 (1584.98 cm^4)


BE9-3922 / E1-0154

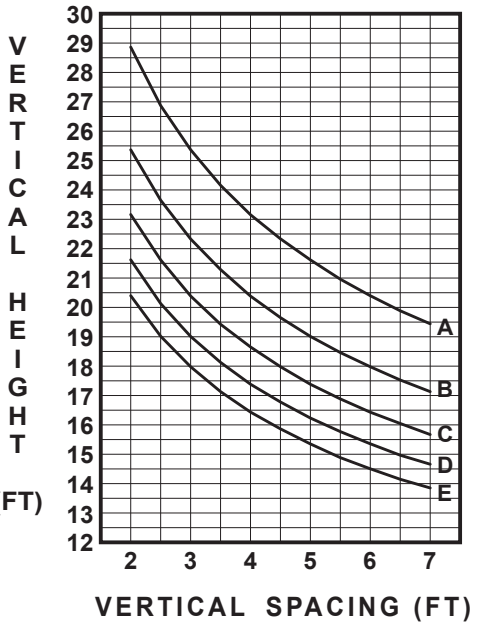

A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3933

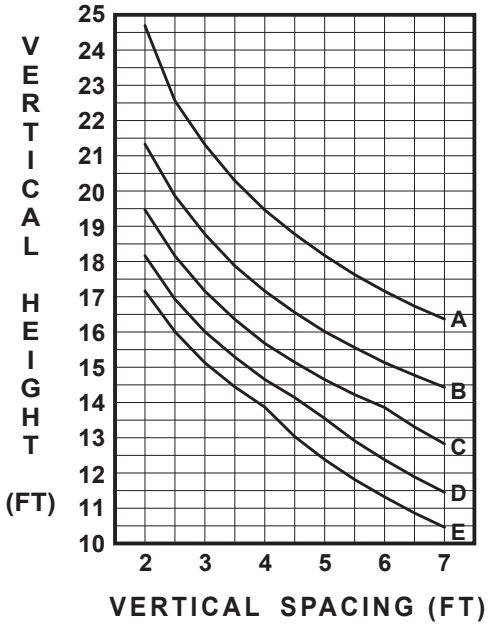


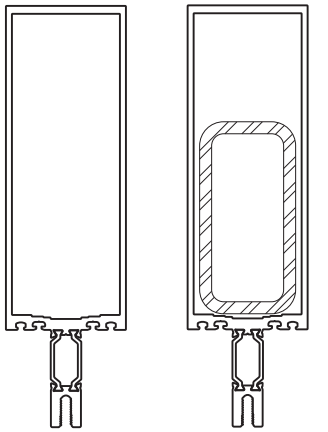

Ixx=23.471 in^4 (976.94 cm^4)


Ixx=37.084 in^4 (1543.54 cm^4)


BE9-3933 / E1-0162

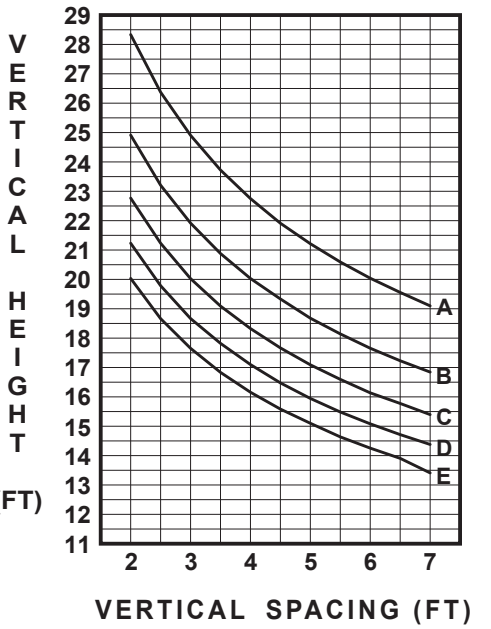


WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

BE9-3933 / E1-0154

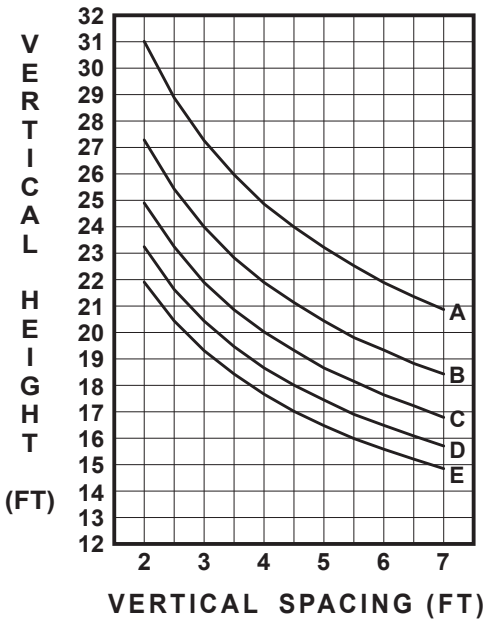

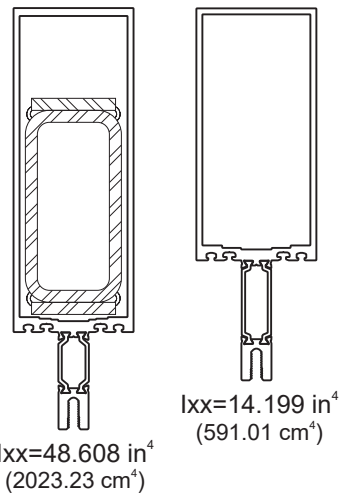



BE9-3925

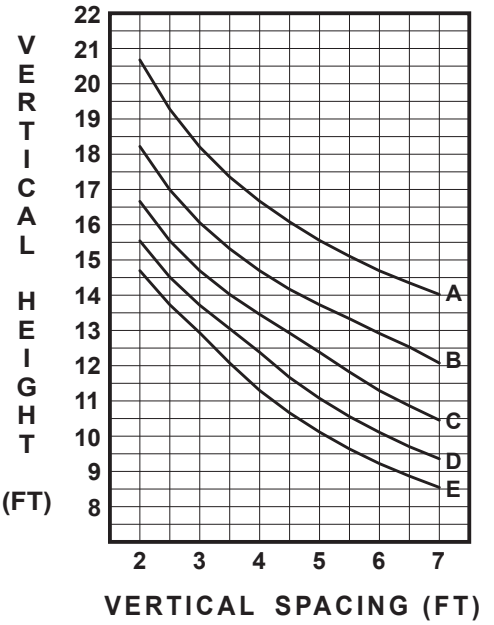


A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3925 / E1-0162

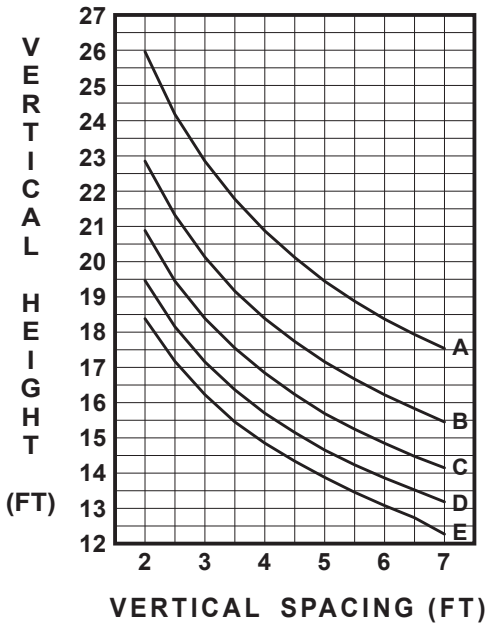

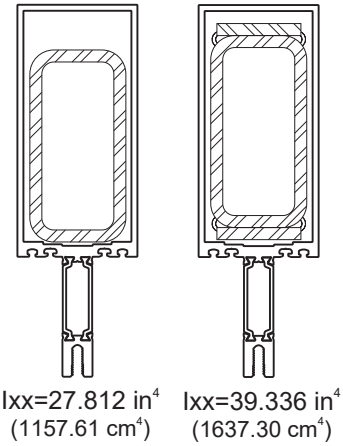



BE9-3925 / E1-0154

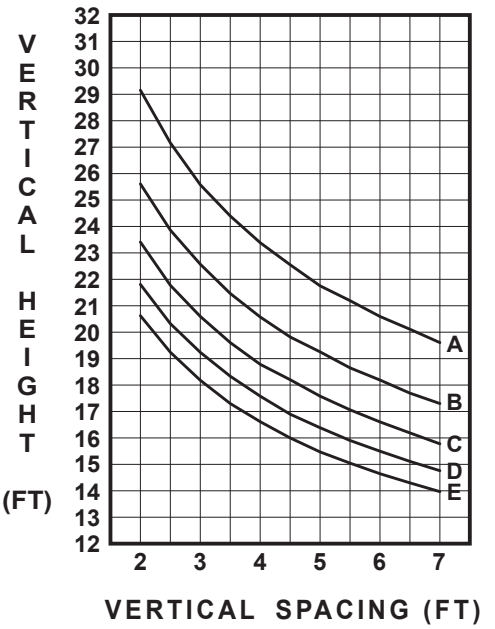


WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

BE9-3928

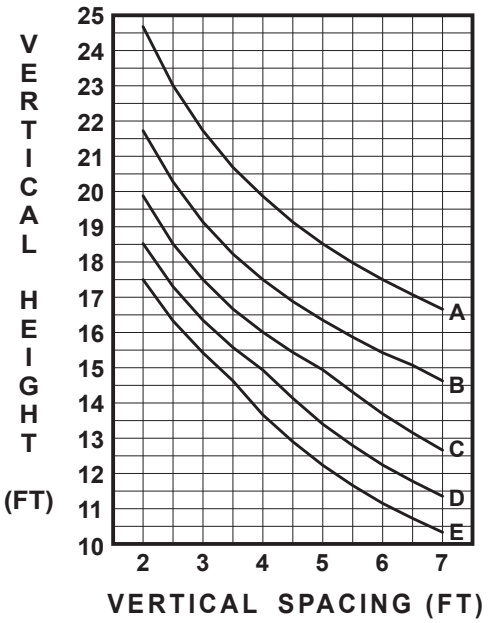

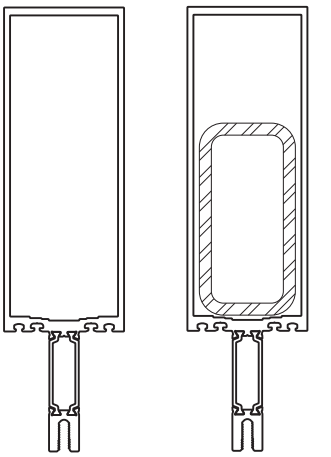

BE9-3928 / E1-0162

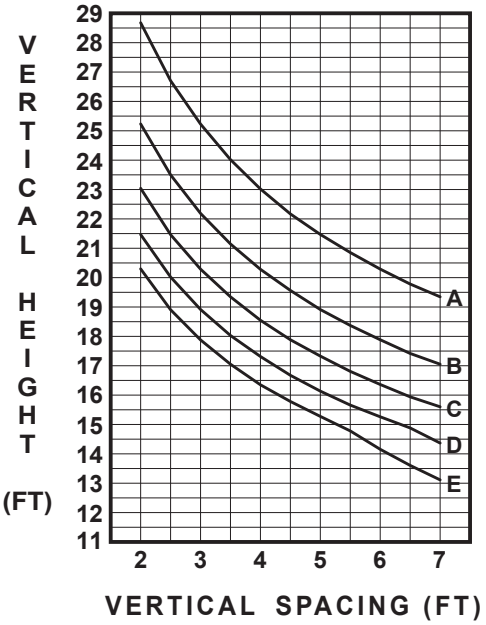

A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

BE9-3928 / E1-0154

