

TABLE OF CONTENTS

**YCW 750 XT IG HIGH PERFORMANCE INSIDE GLAZED
CURTAIN WALL SYSTEM FOR 1" GLAZING**

PICTORIAL VIEW..... Page 2

TYPICAL SPLICE CONDITION Page 3

MULLION END ANCHORS..... Page 4

TYPICAL MID ANCHORS..... Page 5

**FRAMING MEMBERS
USING INTEGRAL FACE COVERS (1/4 SIZE)..... Pages 6 to 8**

**DOOR FRAMING MEMBERS
USING INTEGRAL FACE COVERS (1/4 SIZE)..... Page 9**

**FRAMING MEMBERS
USING APPLIED FACE COVERS (1/4 SIZE)..... Pages 10 to 14**

**DOOR FRAMING MEMBERS
USING APPLIED FACE COVERS (1/4 SIZE)..... Page 15**


**FRAMING MEMBERS FOR SSG GLAZING
USING INTEGRAL FACE COVERS (1/4 SIZE)..... Pages 16 & 17**

**FRAMING MEMBERS FOR SSG GLAZING
USING APPLIED FACE COVERS (1/4 SIZE)..... Pages 18 to 21**

WIND LOAD CHARTS..... Pages 22 to 24


*The latest installation instructions for this product are available at www.ykkap.com.

**YCW 750 XT IG INSIDE GLAZED
CURTAIN WALL SYSTEM**

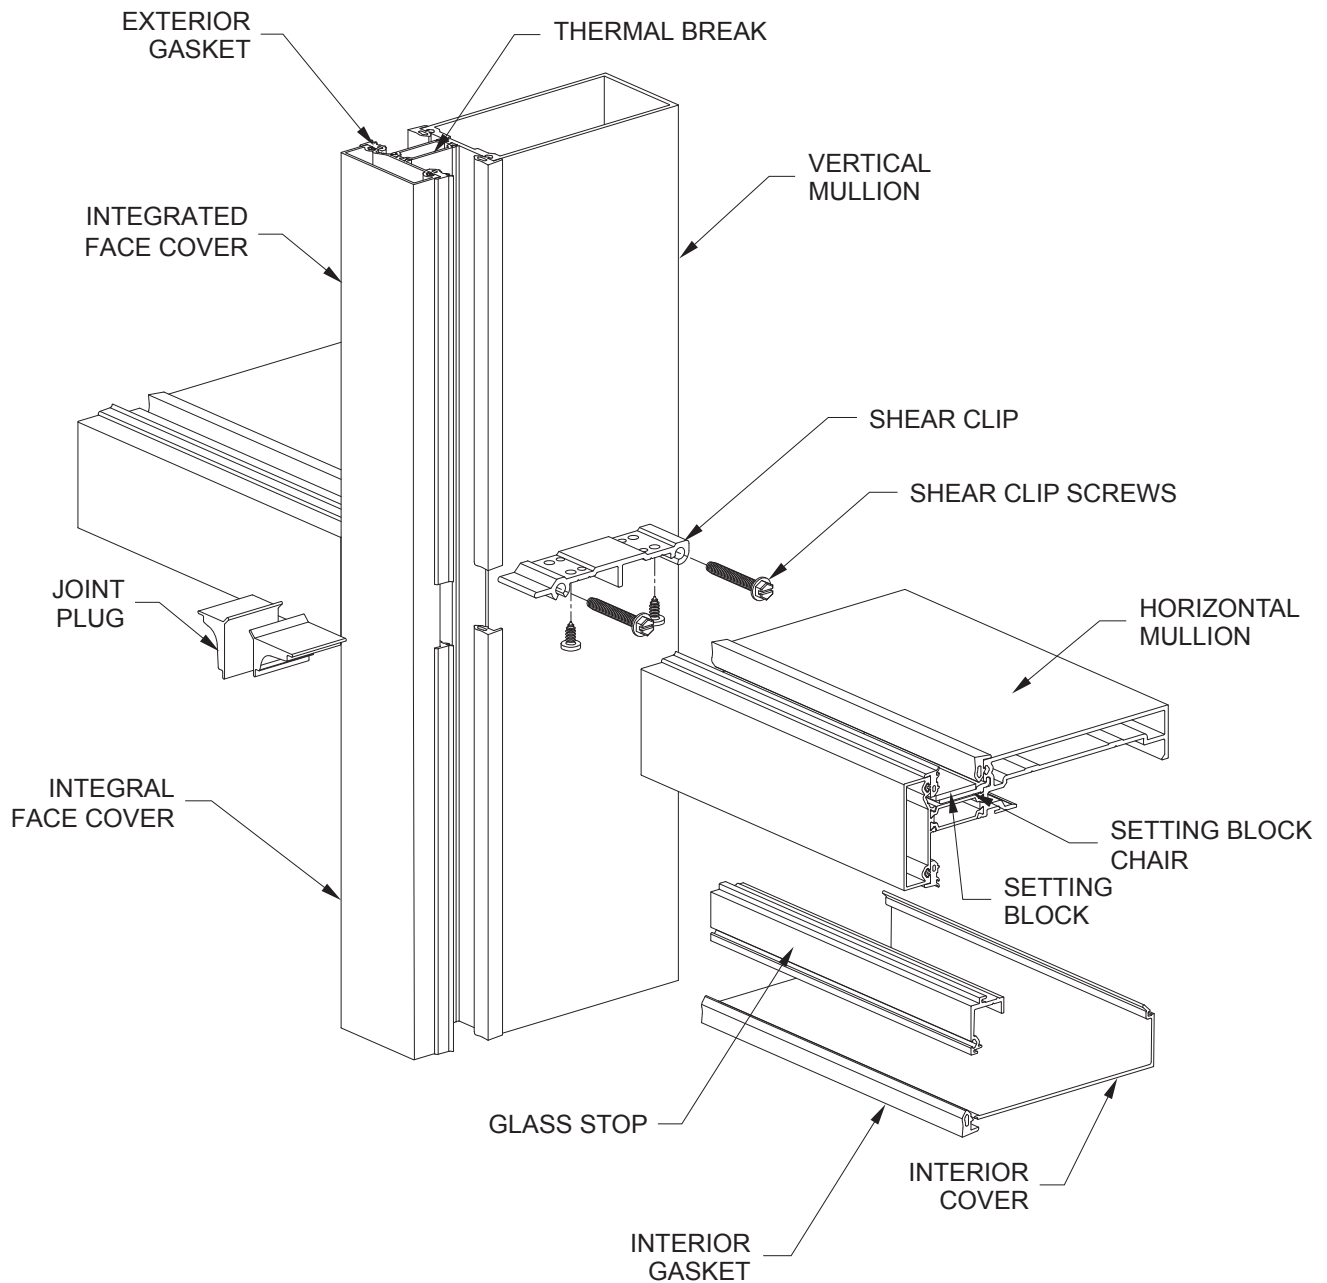


INTEGRAL FACE COVER OPTION SHOWN

TYPICAL SPLICE CONDITION

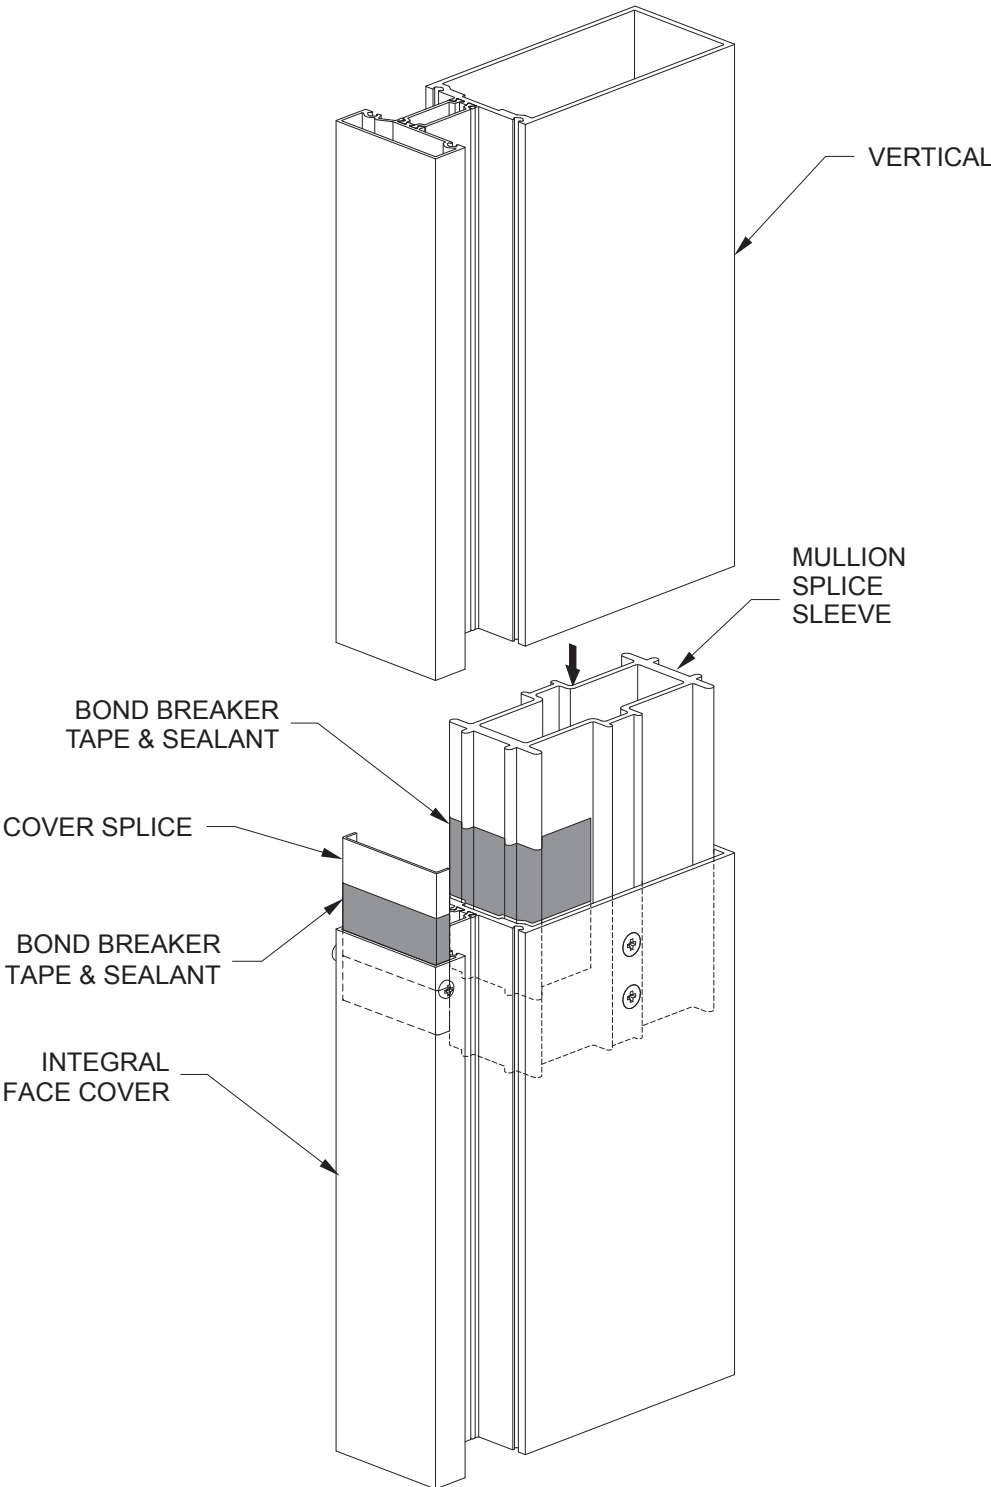


INTEGRAL FACE COVER OPTION SHOWN

VERTICAL MULLION WITH “T” END ANCHOR

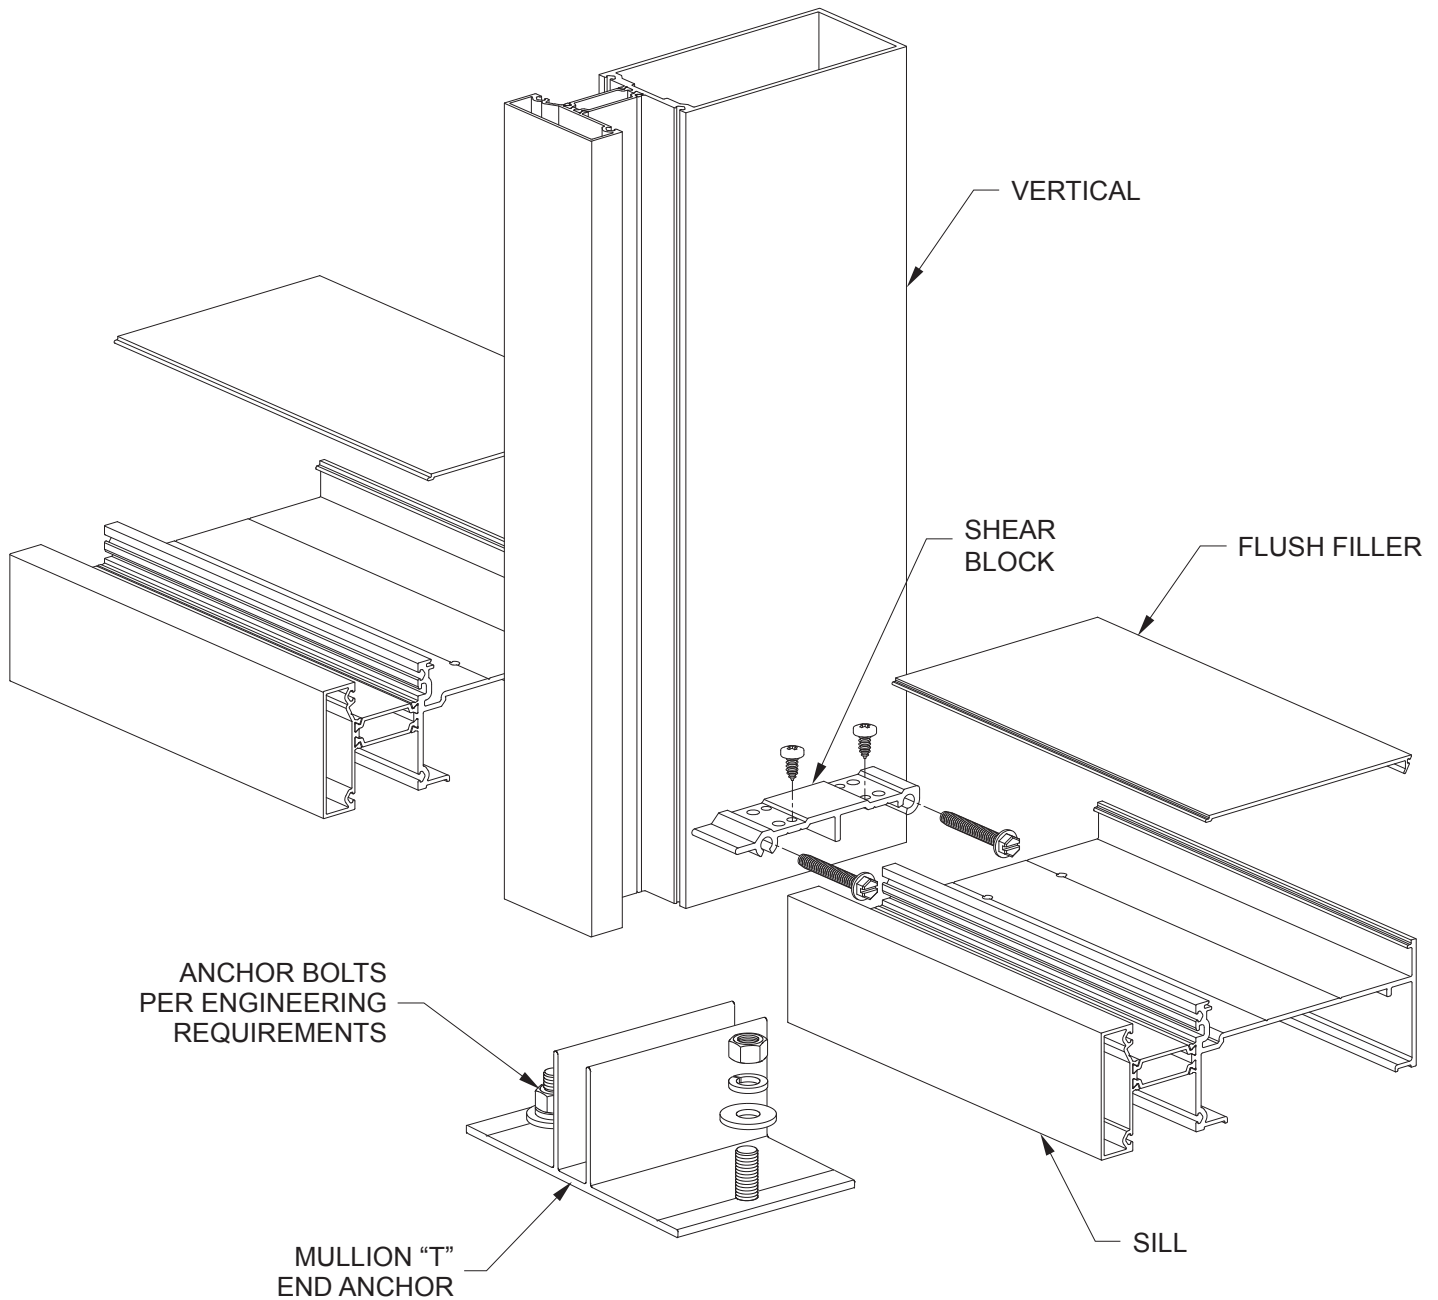


INTEGRAL FACE COVER OPTION SHOWN


TYPICAL MID ANCHORS FOR WIND LOAD & DEAD LOAD

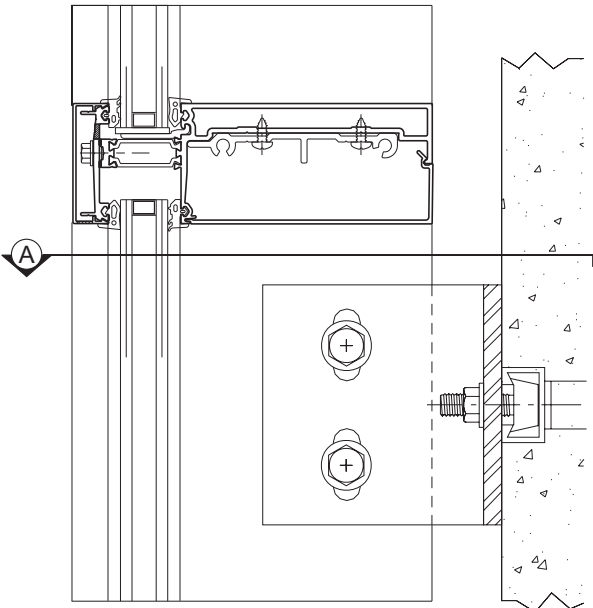


TYPICAL WIND LOAD ANCHOR

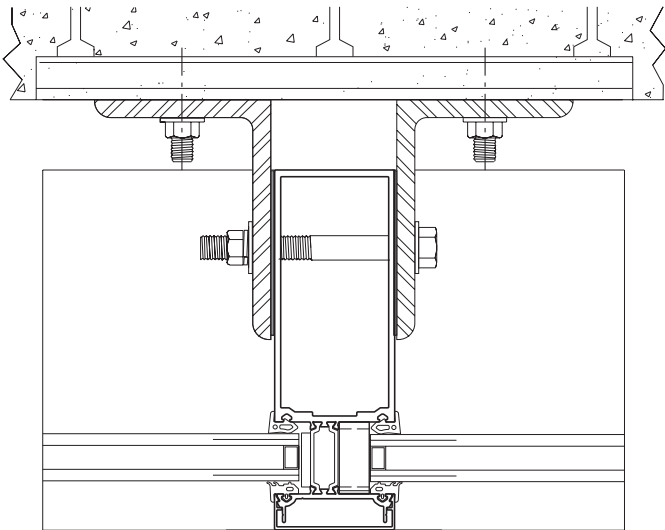

SECTION A

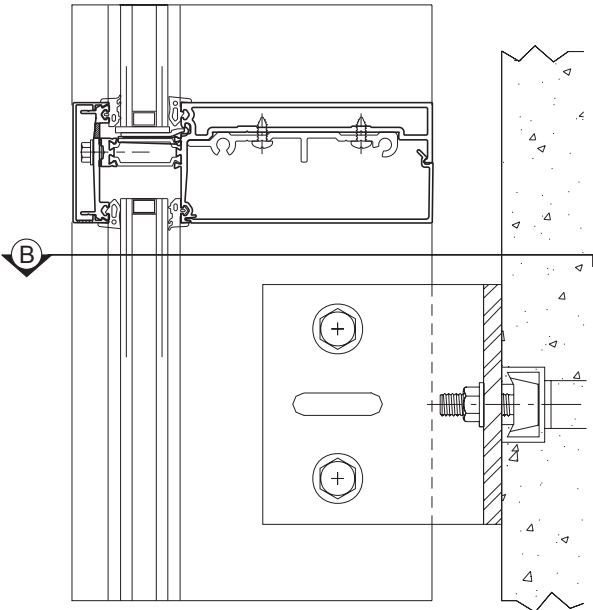


TYPICAL DEAD LOAD ANCHOR

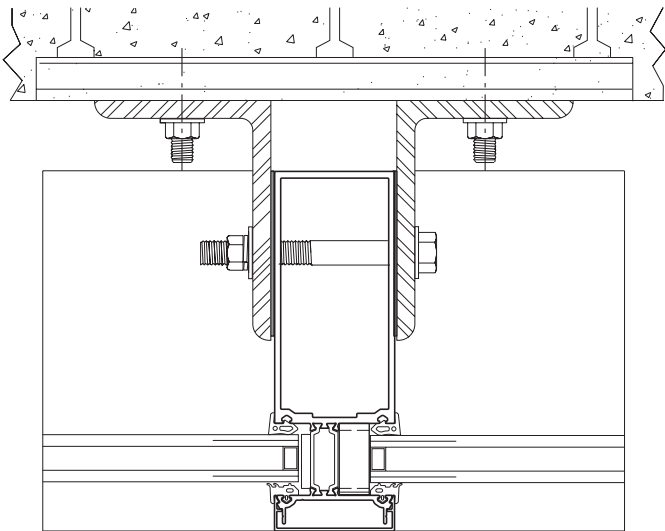


SECTION B


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 1" GLAZING USING INTEGRAL FACE COVERS

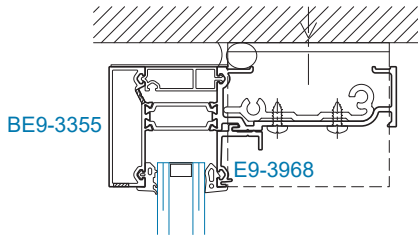


SECTION 1
HEAD

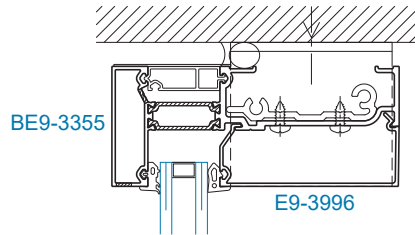


SECTION 1A
HEAD

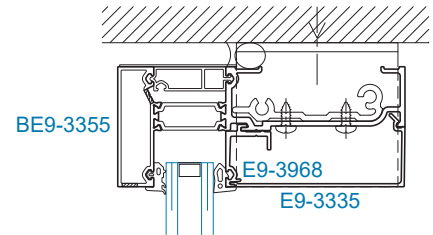


SECTION 1B
HEAD

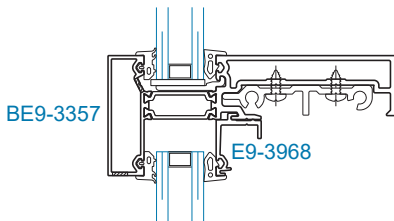


SECTION 2
HORIZONTAL

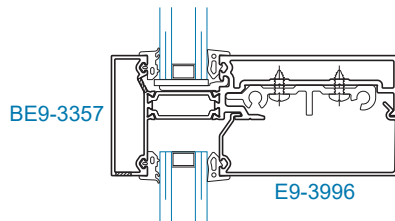


SECTION 2A
HORIZONTAL

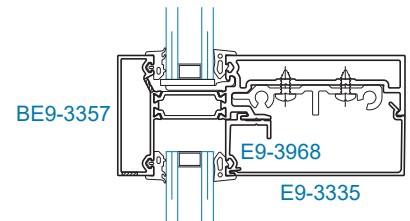


SECTION 2B
HORIZONTAL

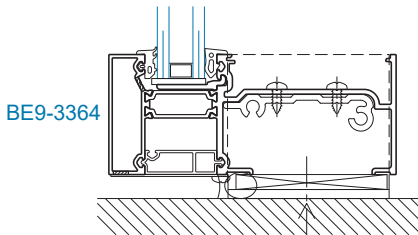


SECTION 3
SILL

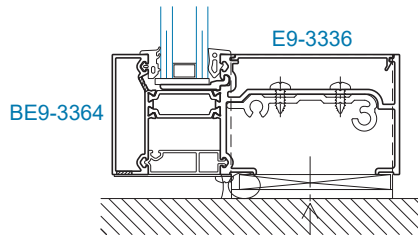



SECTION 3A
SILL




SECTION 4
JAMB

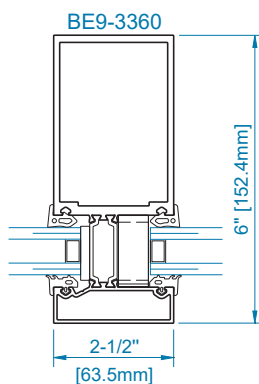


SECTION 5
VERTICAL

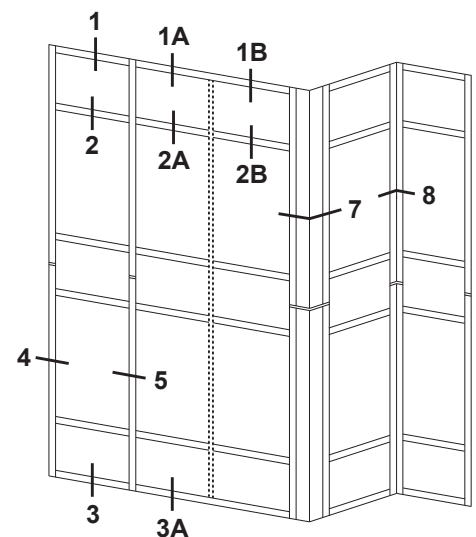


STANDARD FRAMING MEMBERS FOR 1" GLAZING
USING INTEGRAL FACE COVERS

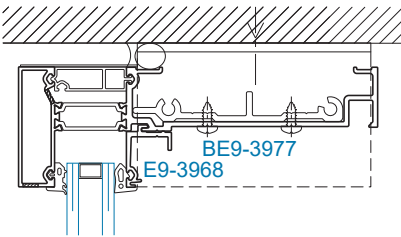


SECTION 1
HEAD

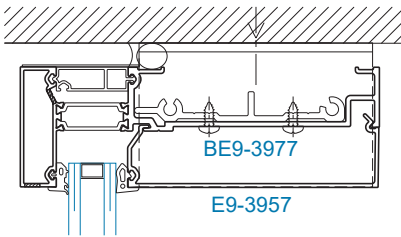


SECTION 1A
HEAD

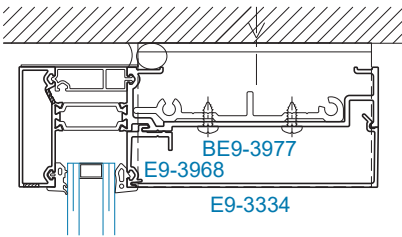


SECTION 1B
HEAD

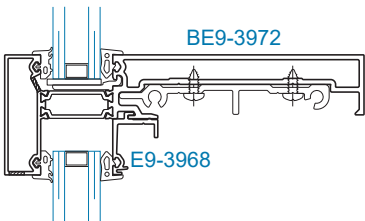


SECTION 2
HORIZONTAL

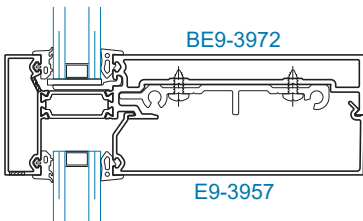


SECTION 2A
HORIZONTAL

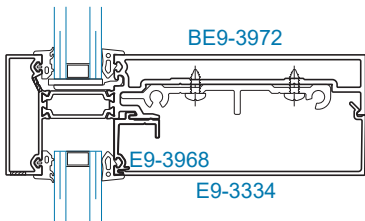


SECTION 2B
HORIZONTAL

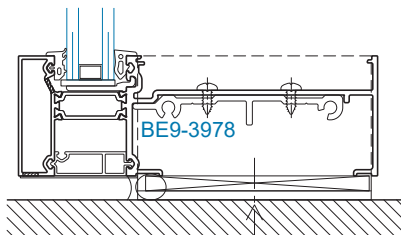


SECTION 3
SILL

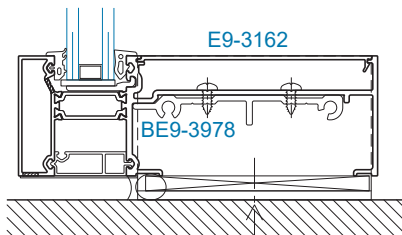


SECTION 3A
SILL

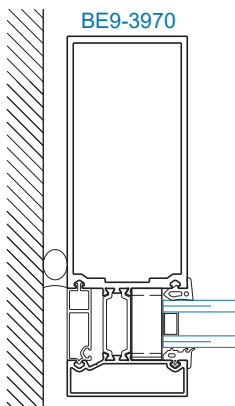


SECTION 4
JAMB

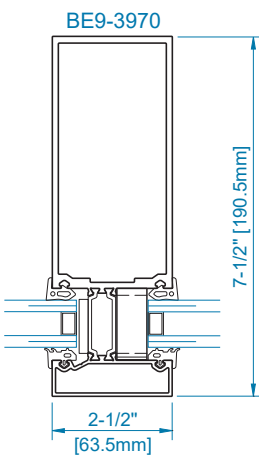




SECTION 5
VERTICAL

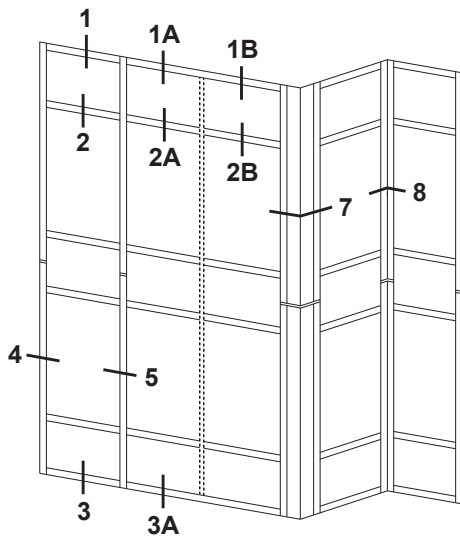



SCALE: 1/4 SIZE




**CORNER FRAMING MEMBERS FOR 1" GLAZING
USING INTEGRAL FACE COVERS**

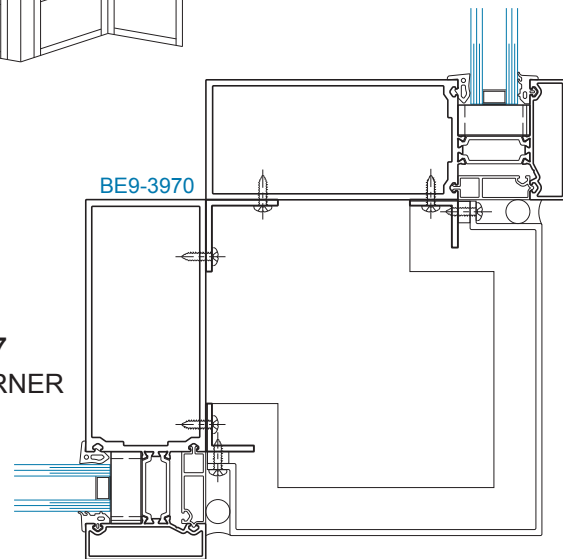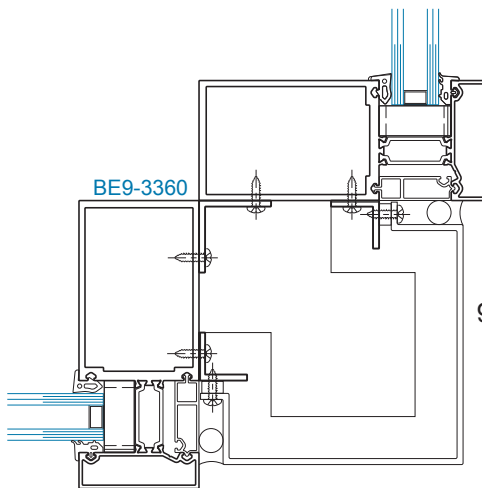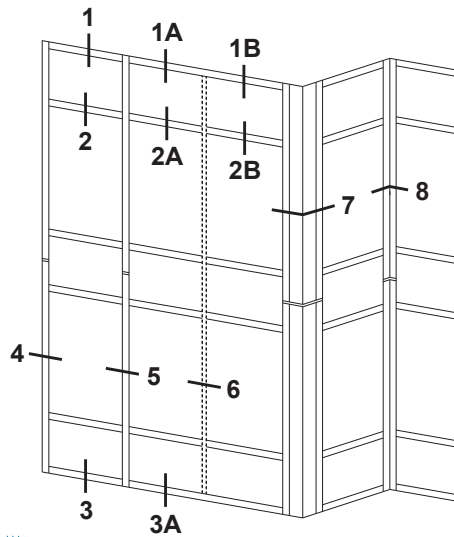





SECTION 7
90° OUTSIDE CORNER

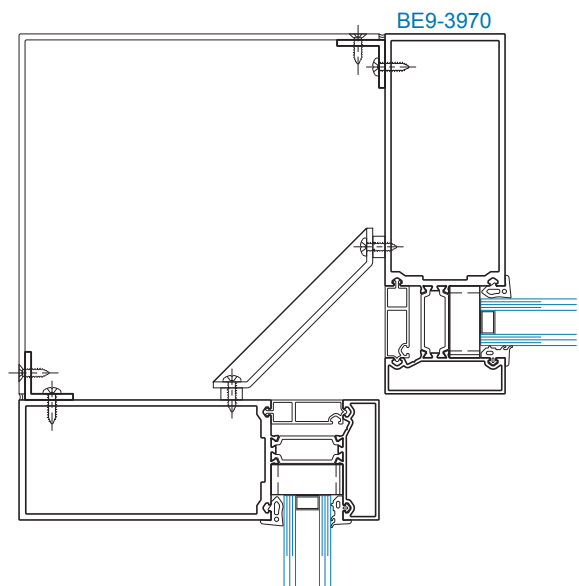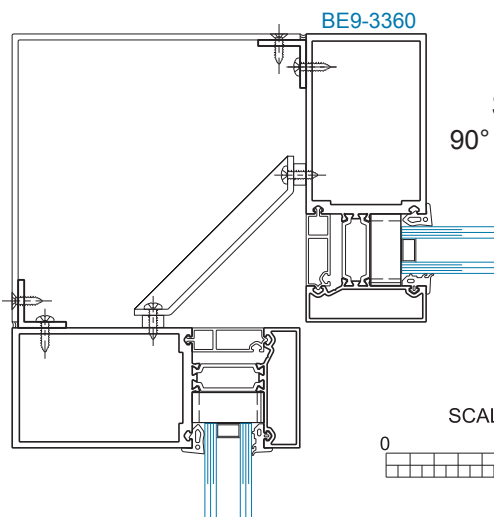

SECTION 8
90° INSIDE CORNER




35T DOOR FRAMING MEMBERS FOR 1" GLAZING
USING INTEGRAL FACE COVERS

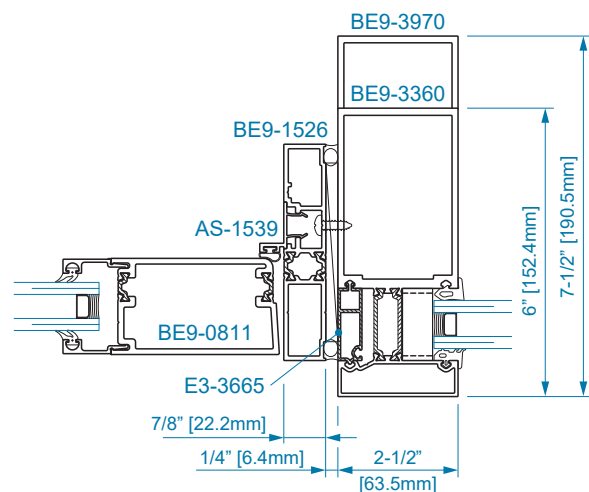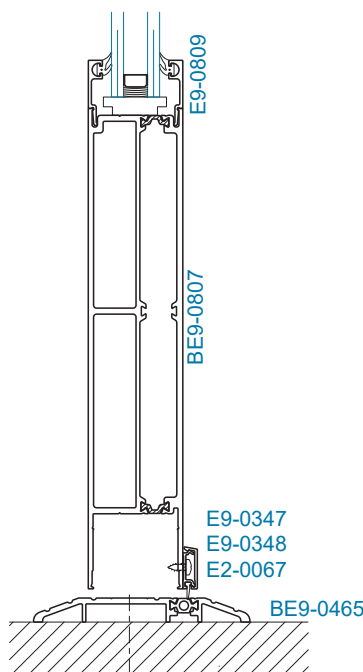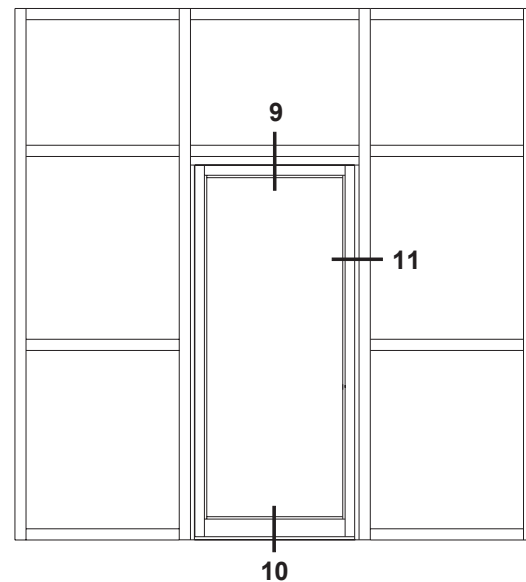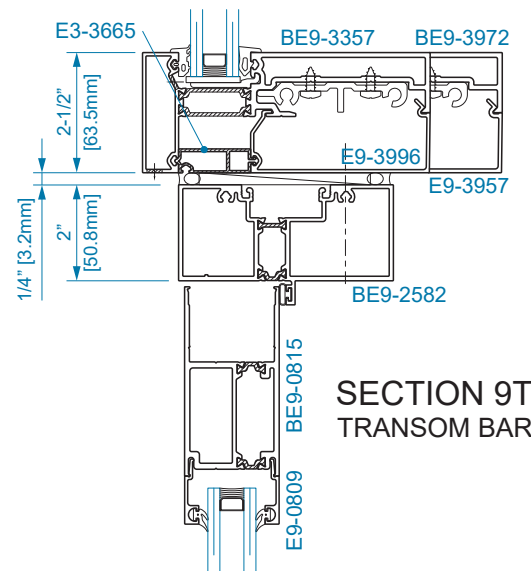


SECTION 11T
DOOR JAMB


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 1" GLAZING USING APPLIED FACE COVERS

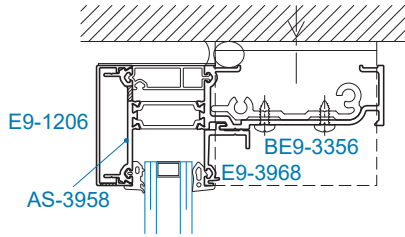


SECTION 1
HEAD

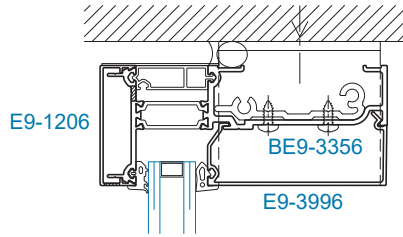


SECTION 1A
HEAD

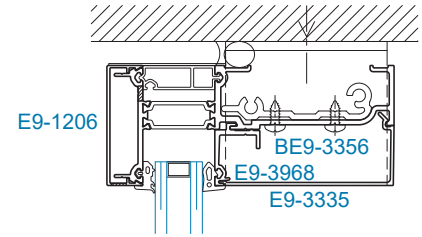


SECTION 1B
HEAD

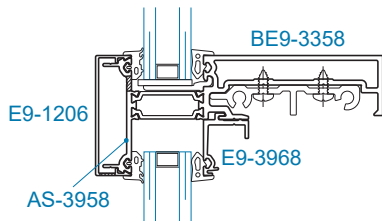


SECTION 2
HORIZONTAL

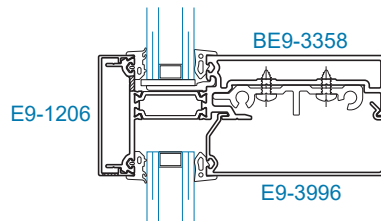


SECTION 2A
HORIZONTAL

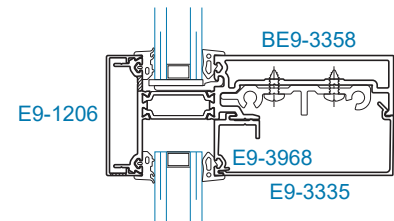


SECTION 2B
HORIZONTAL

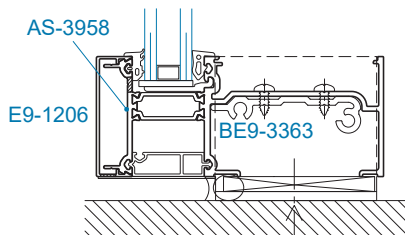


SECTION 3
SILL

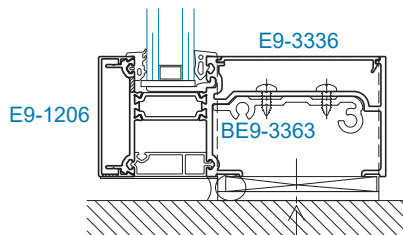


SECTION 3A
SILL

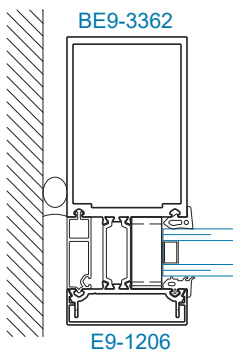


SECTION 4
JAMB

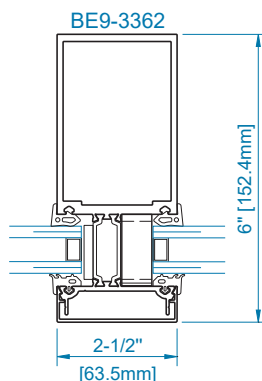


SECTION 5
VERTICAL

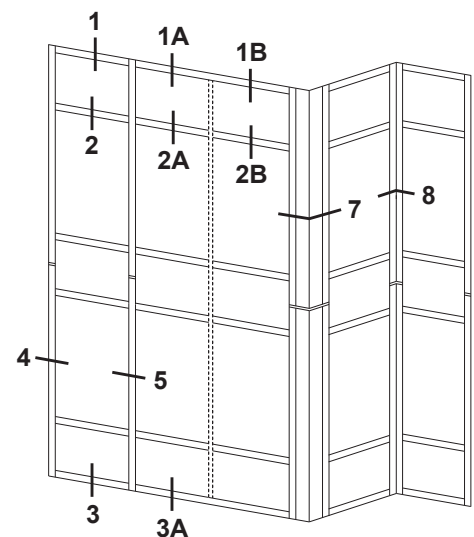


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 1" GLAZING
USING APPLIED FACE COVERS

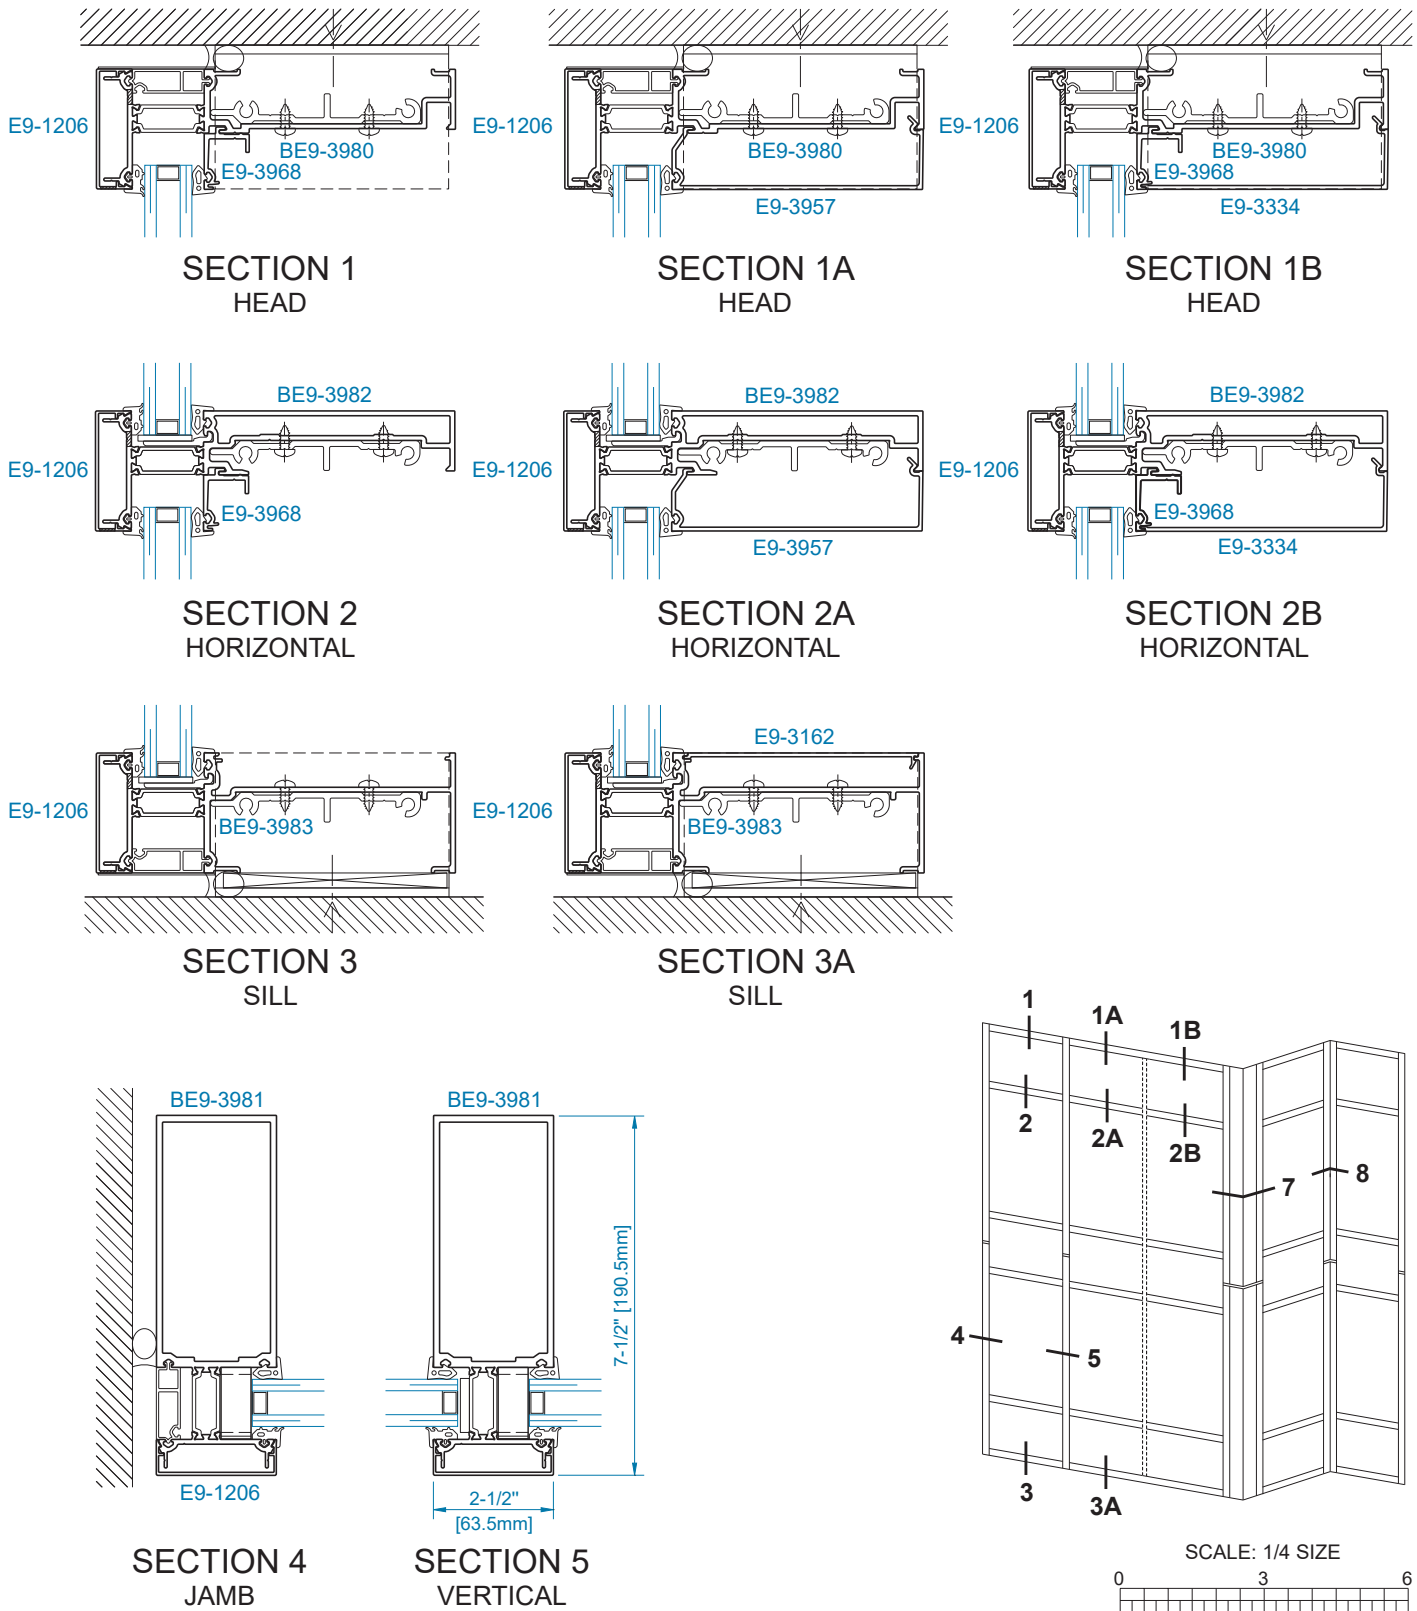


OPTIONAL OUTSIDE GLAZED FRAMING MEMBERS FOR 1" GLAZING USING APPLIED FACE COVERS

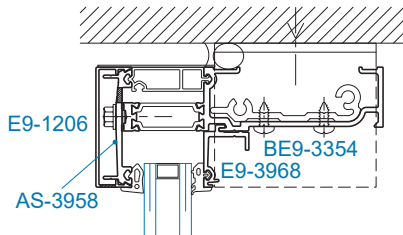


SECTION 1
HEAD

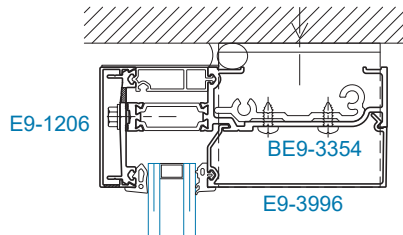


SECTION 1A
HEAD

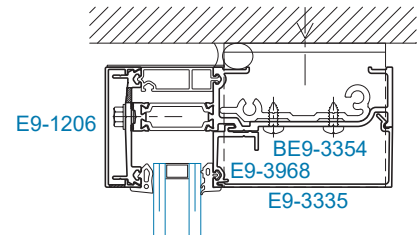


SECTION 1B
HEAD

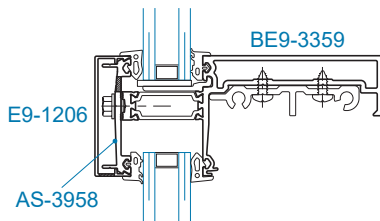


SECTION 2
HORIZONTAL

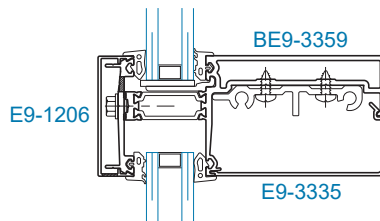


SECTION 2A
HORIZONTAL

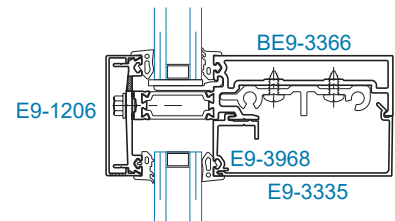


SECTION 2B
HORIZONTAL

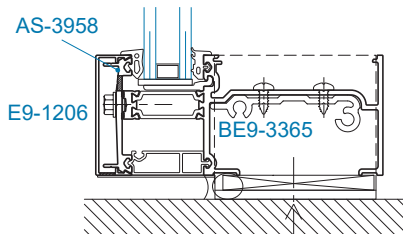


SECTION 3
SILL

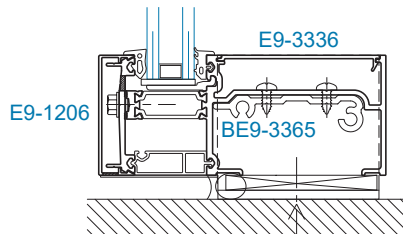


SECTION 3A
SILL

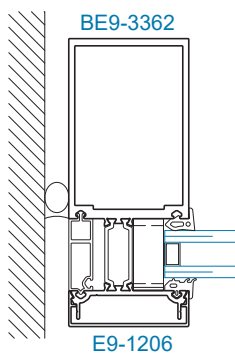


SECTION 4
JAMB

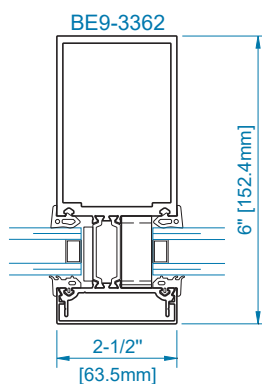


SECTION 5
VERTICAL

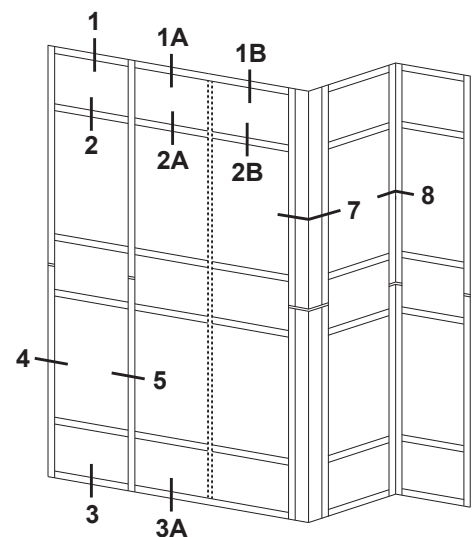



SCALE: 1/4 SIZE




OPTIONAL OUTSIDE GLAZED FRAMING MEMBERS FOR 1" GLAZING USING APPLIED FACE COVERS

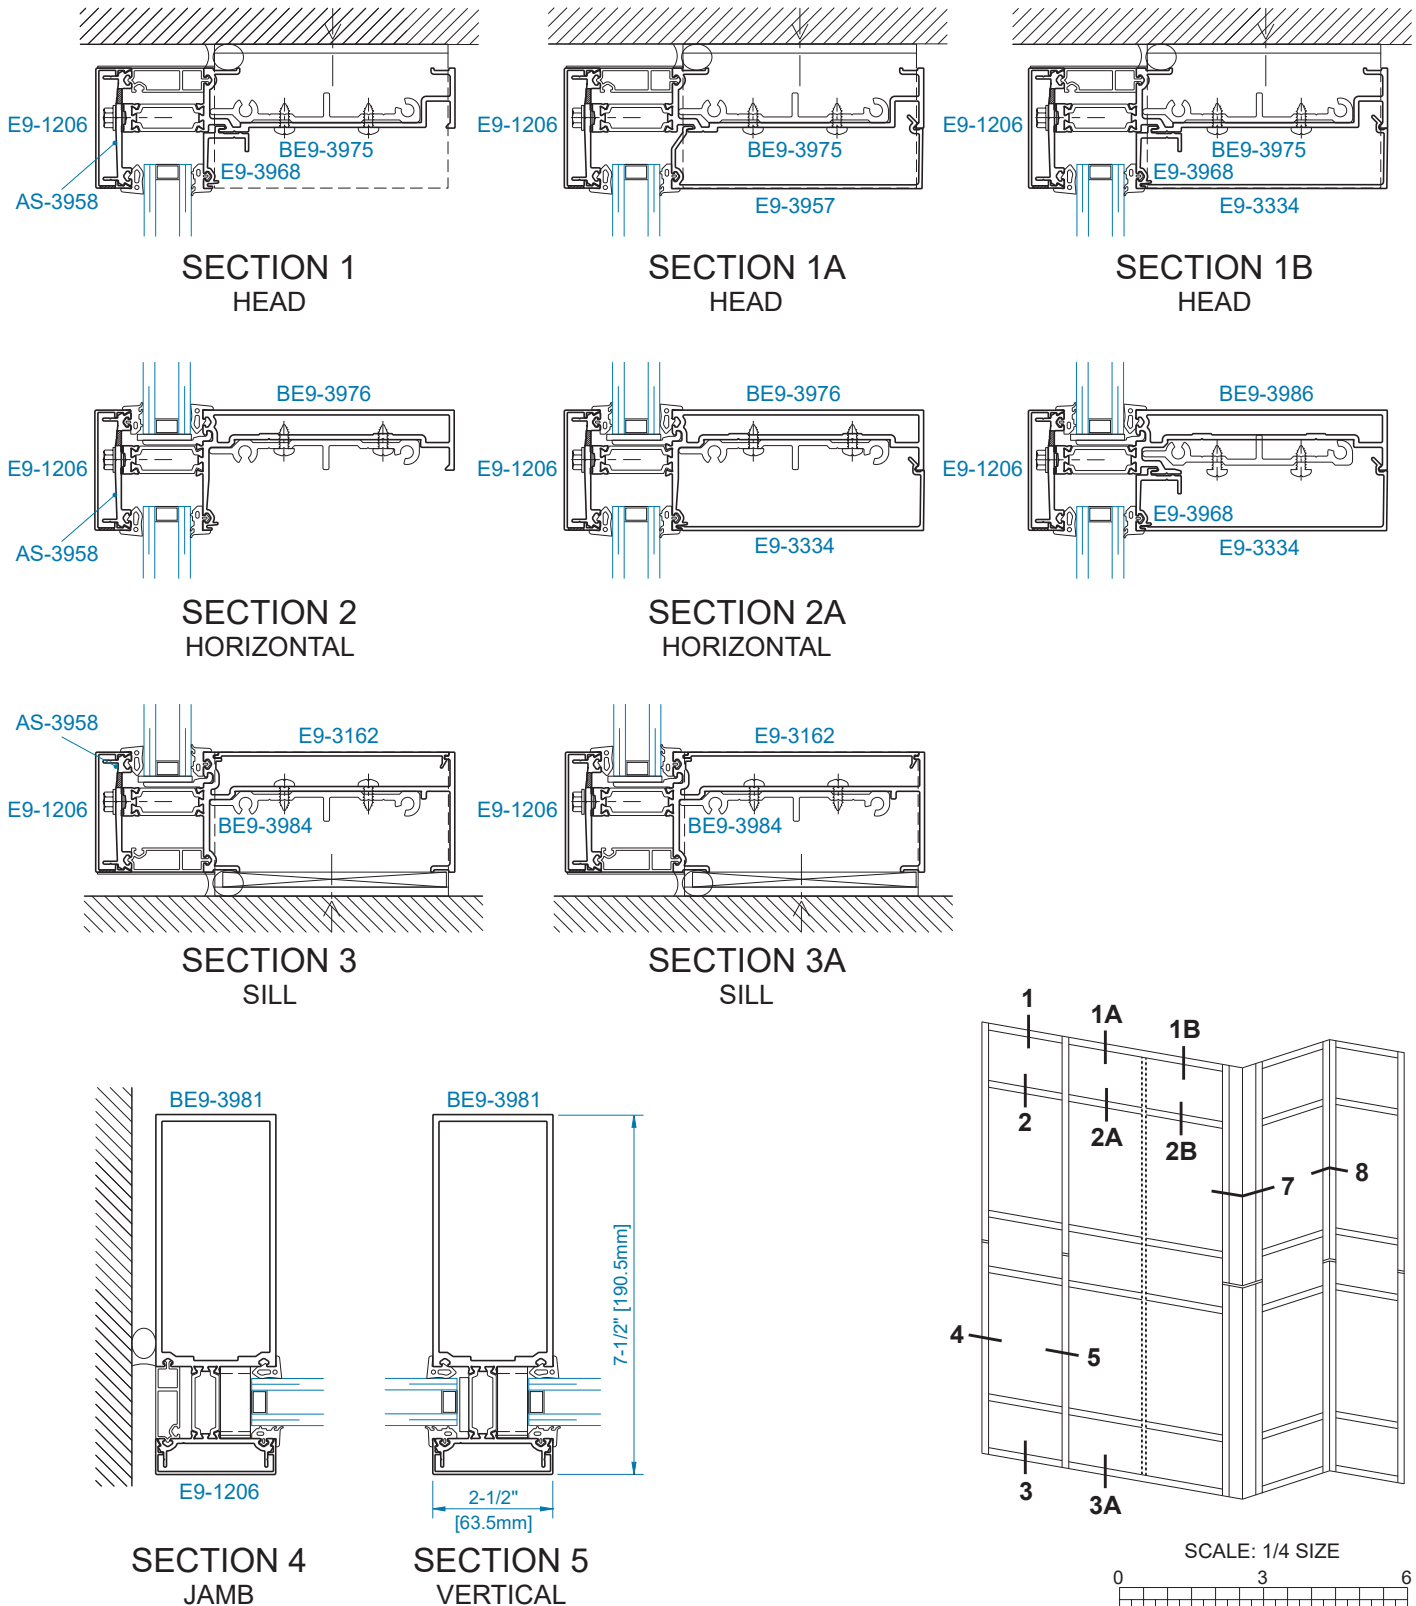




**CORNER FRAMING MEMBERS FOR 1" GLAZING
USING APPLIED FACE COVERS**

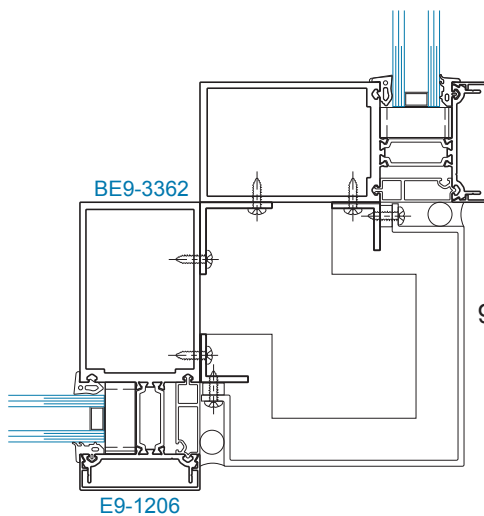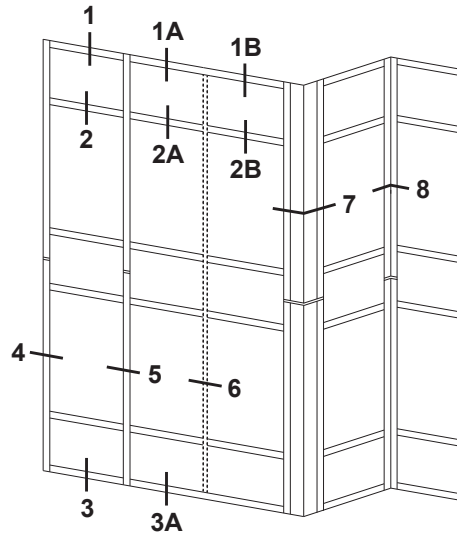






SECTION 7
90° OUTSIDE CORNER

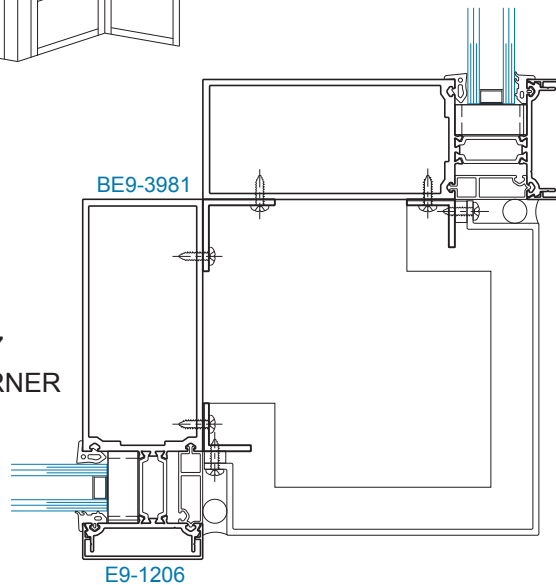


SECTION 8
90° INSIDE CORNER

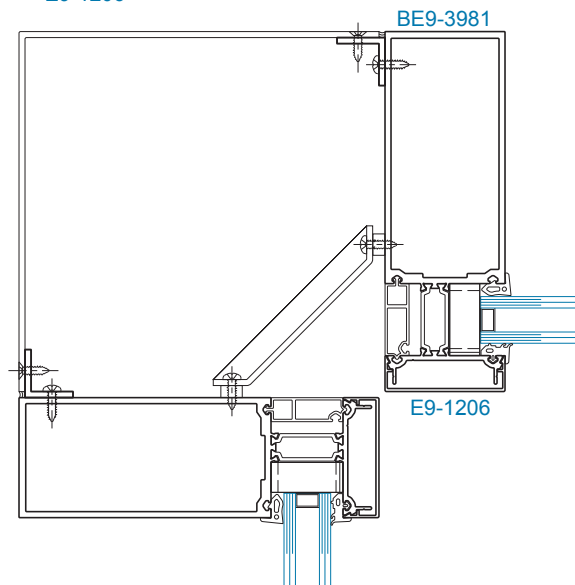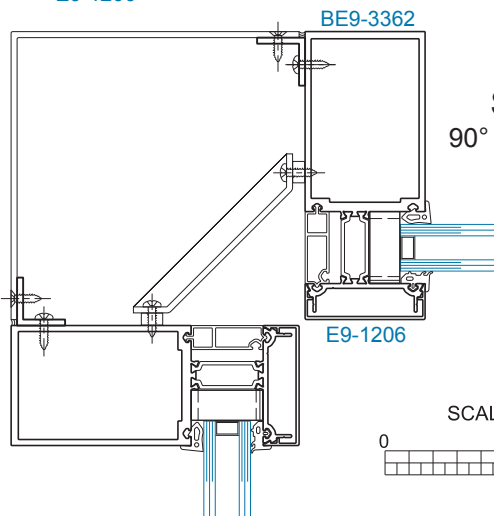


35T DOOR FRAMING MEMBERS FOR 1" GLAZING
USING APPLIED FACE COVERS

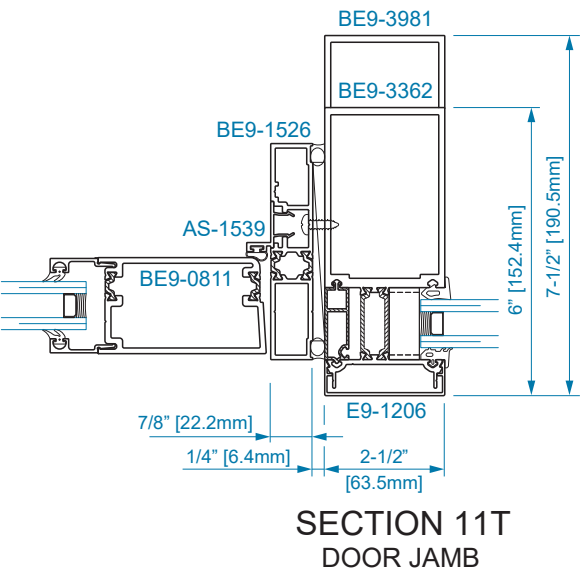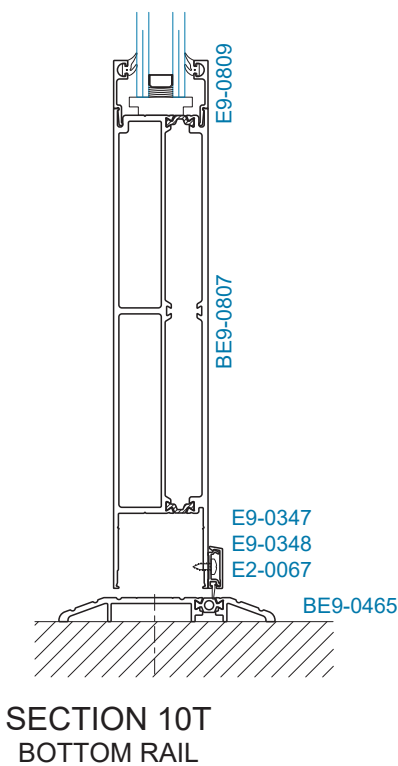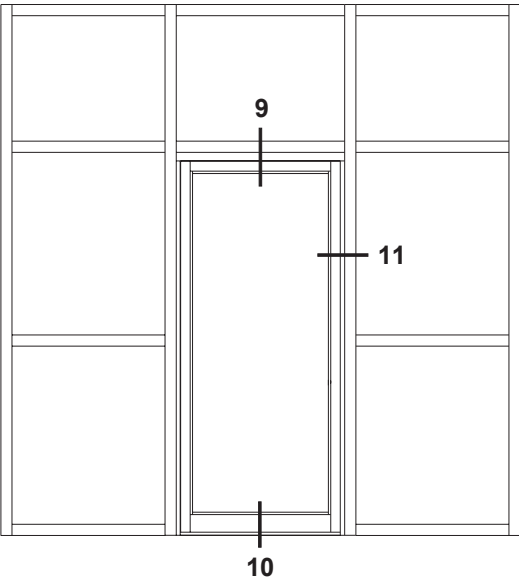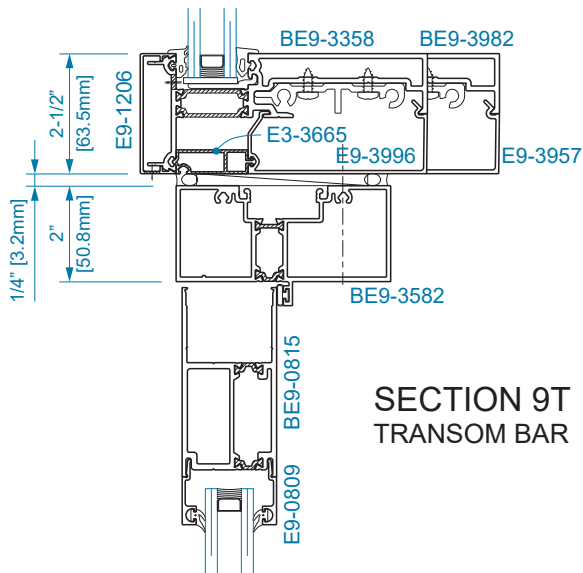


**STANDARD FRAMING MEMBERS FOR 1" SSG GLAZING
USING INTEGRAL FACE COVERS**

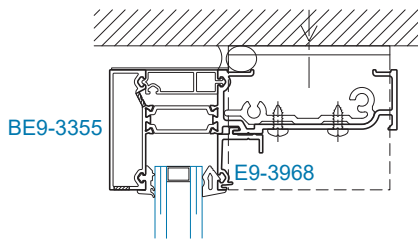


**SECTION 1
HEAD**

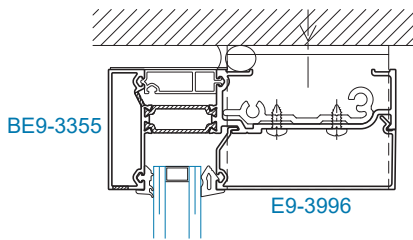


**SECTION 1A
HEAD**

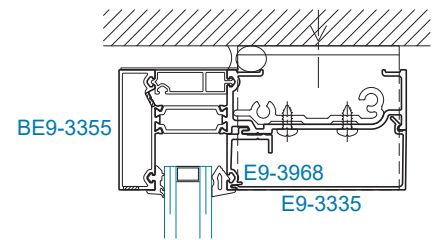


**SECTION 1B
HEAD**

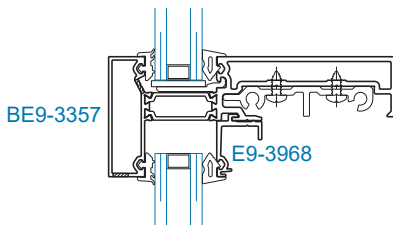


**SECTION 2
HORIZONTAL**

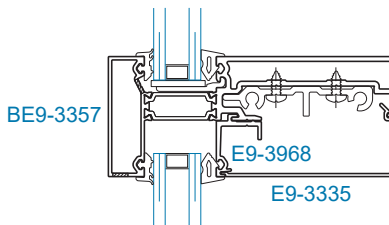


**SECTION 2A
HORIZONTAL**

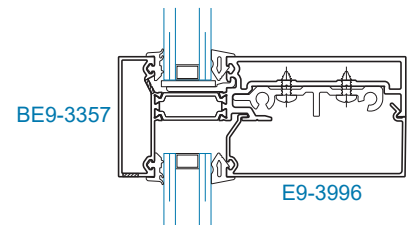


**SECTION 2B
HORIZONTAL**

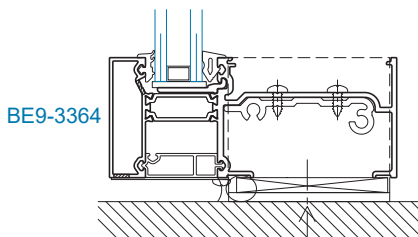


**SECTION 3
SILL**

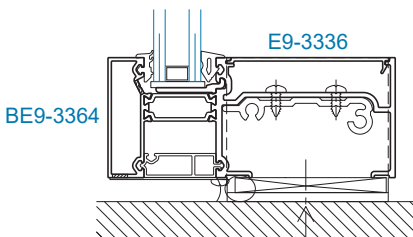


**SECTION 3A
SILL**




**SECTION 4
JAMB**

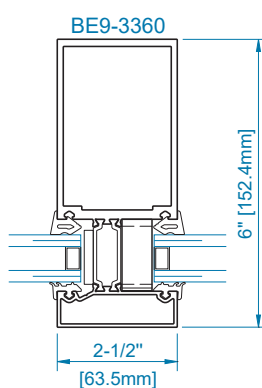


**SECTION 5
VERTICAL**




**SECTION 6
SSG VERTICAL**

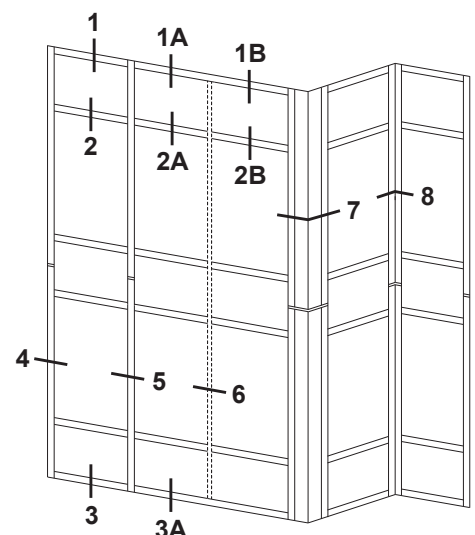


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 1" SSG GLAZING
USING INTEGRAL FACE COVERS

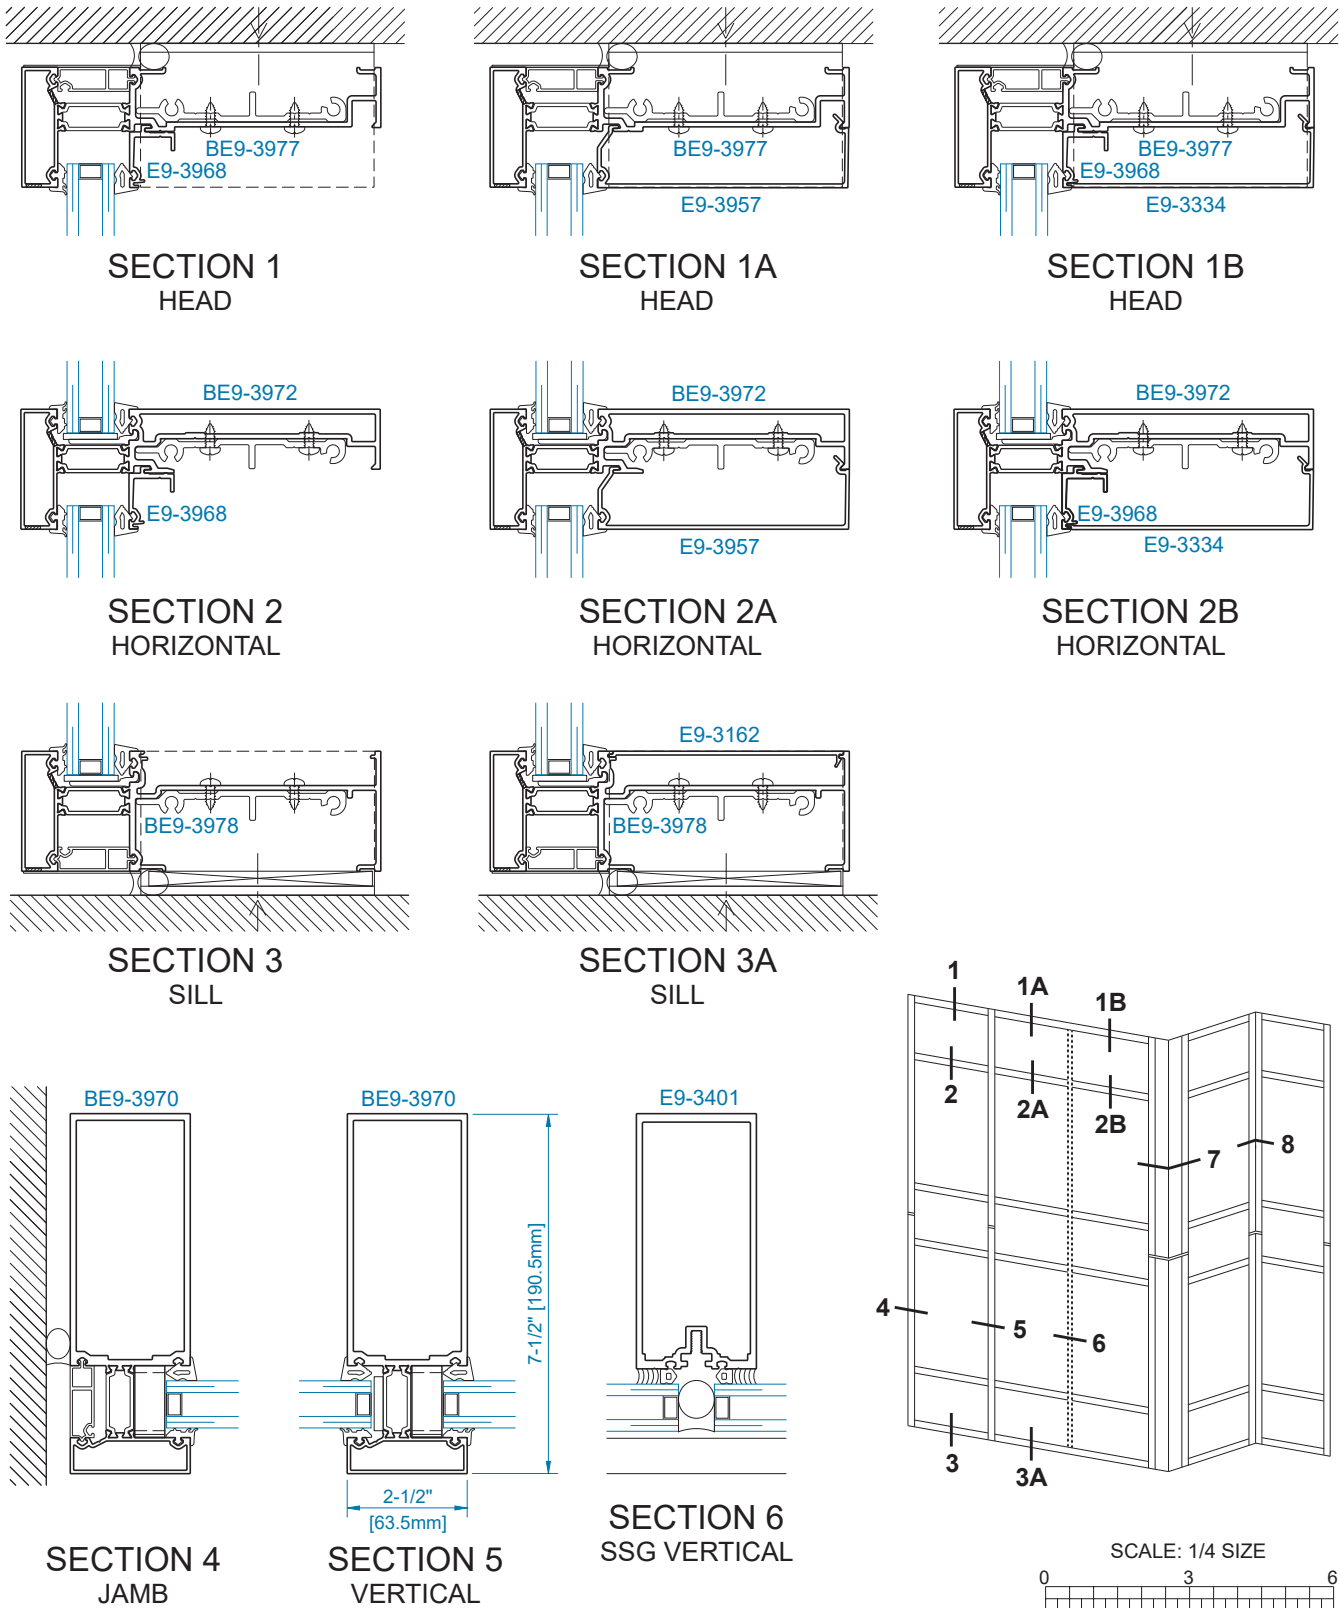


STANDARD FRAMING MEMBERS FOR 1" SSG GLAZING USING APPLIED FACE COVERS

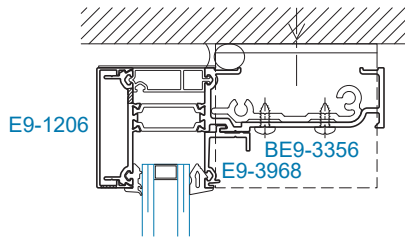


SECTION 1
HEAD

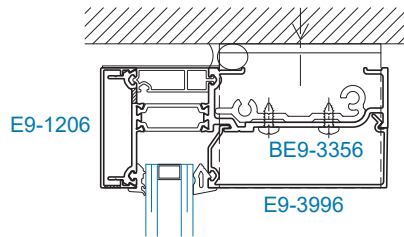


SECTION 1A
HEAD

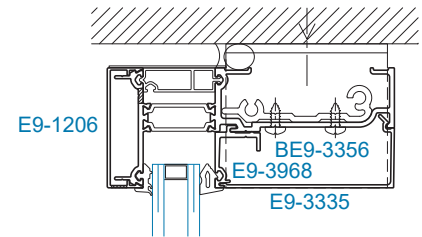


SECTION 1B
HEAD

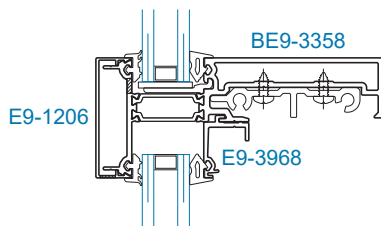


SECTION 2
HORIZONTAL

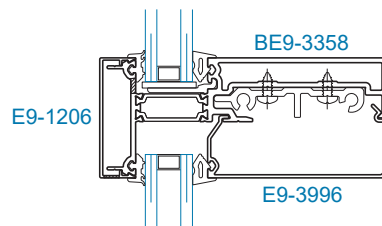


SECTION 2A
HORIZONTAL

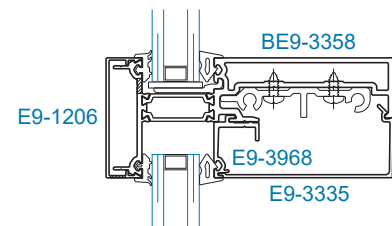


SECTION 2B
HORIZONTAL

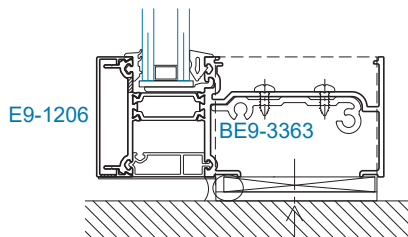


SECTION 3
SILL

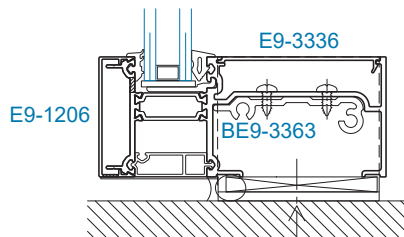


SECTION 3A
SILL

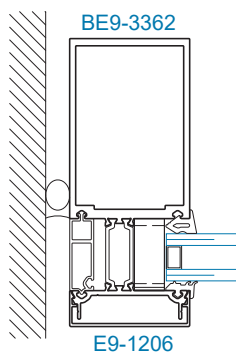


SECTION 4
JAMB

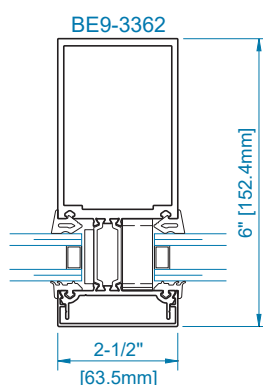


SECTION 5
VERTICAL




SECTION 6
SSG VERTICAL

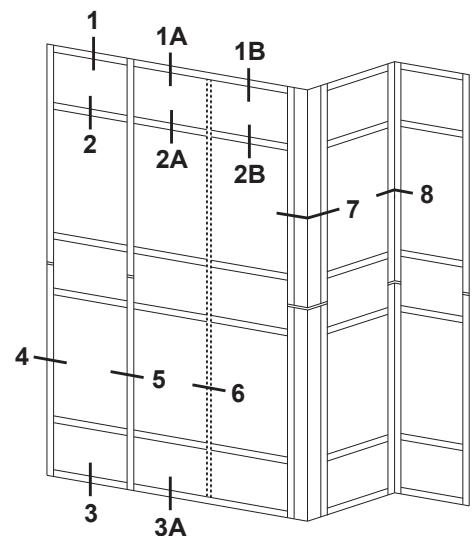


SCALE: 1/4 SIZE




STANDARD FRAMING MEMBERS FOR 1" SSG GLAZING
USING APPLIED FACE COVERS

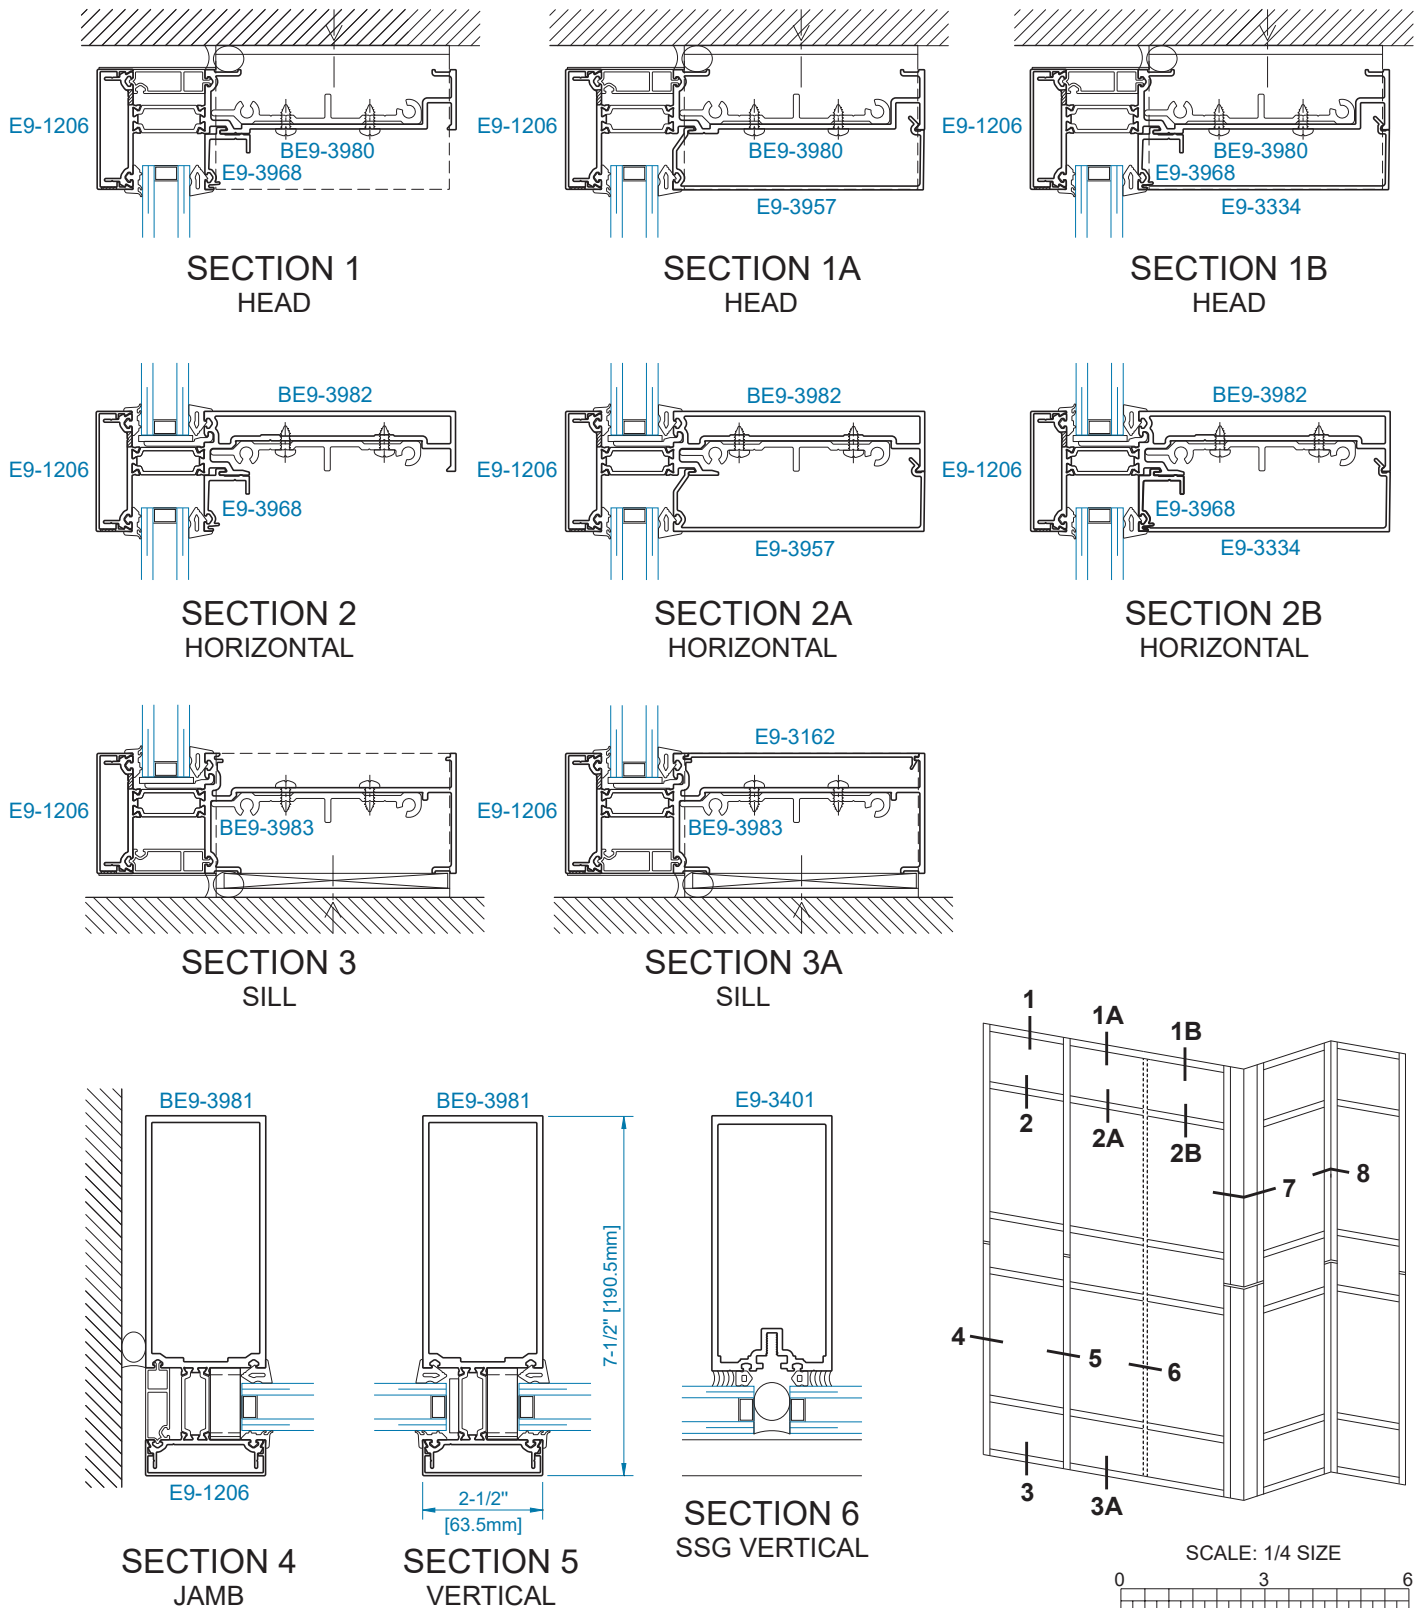


OPTIONAL OUTSIDE GLAZED FRAMING MEMBERS FOR 1" SSG GLAZING USING APPLIED FACE COVERS

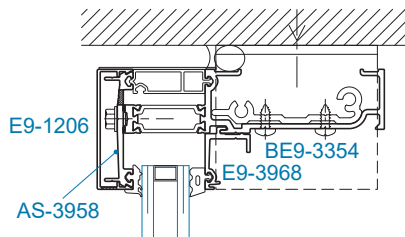


SECTION 1
HEAD

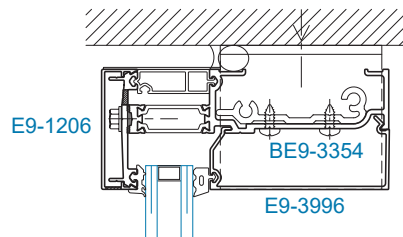


SECTION 1A
HEAD

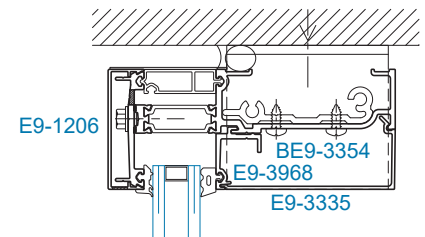


SECTION 1B
HEAD

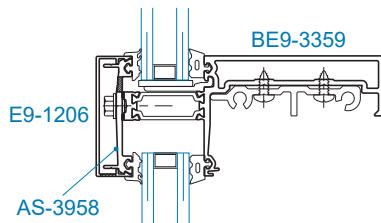


SECTION 2
HORIZONTAL

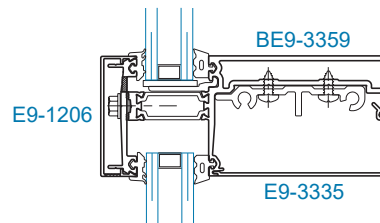


SECTION 2A
HORIZONTAL

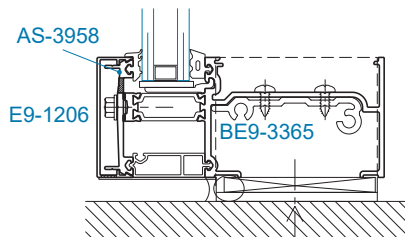


SECTION 3
SILL

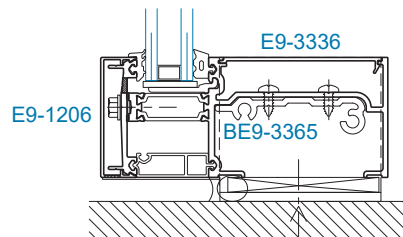


SECTION 3A
SILL

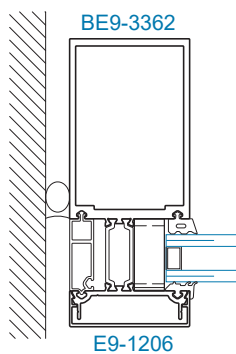


SECTION 4
JAMB

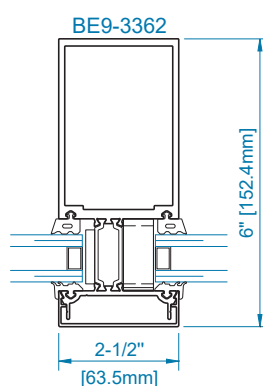


SECTION 5
VERTICAL




SECTION 6
SSG VERTICAL

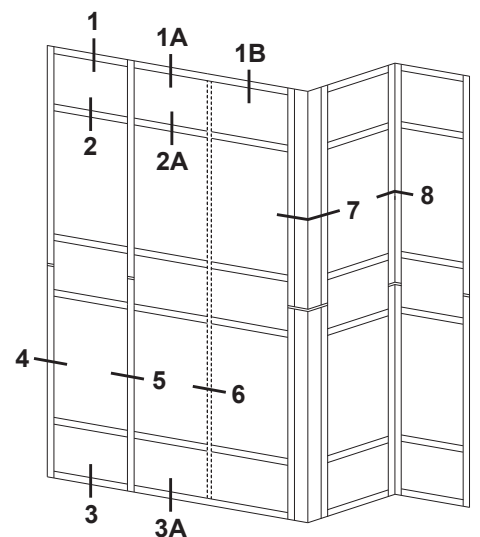

SCALE: 1/4 SIZE



OPTIONAL OUTSIDE GLAZED FRAMING MEMBERS FOR 1" SSG GLAZING
USING APPLIED FACE COVERS

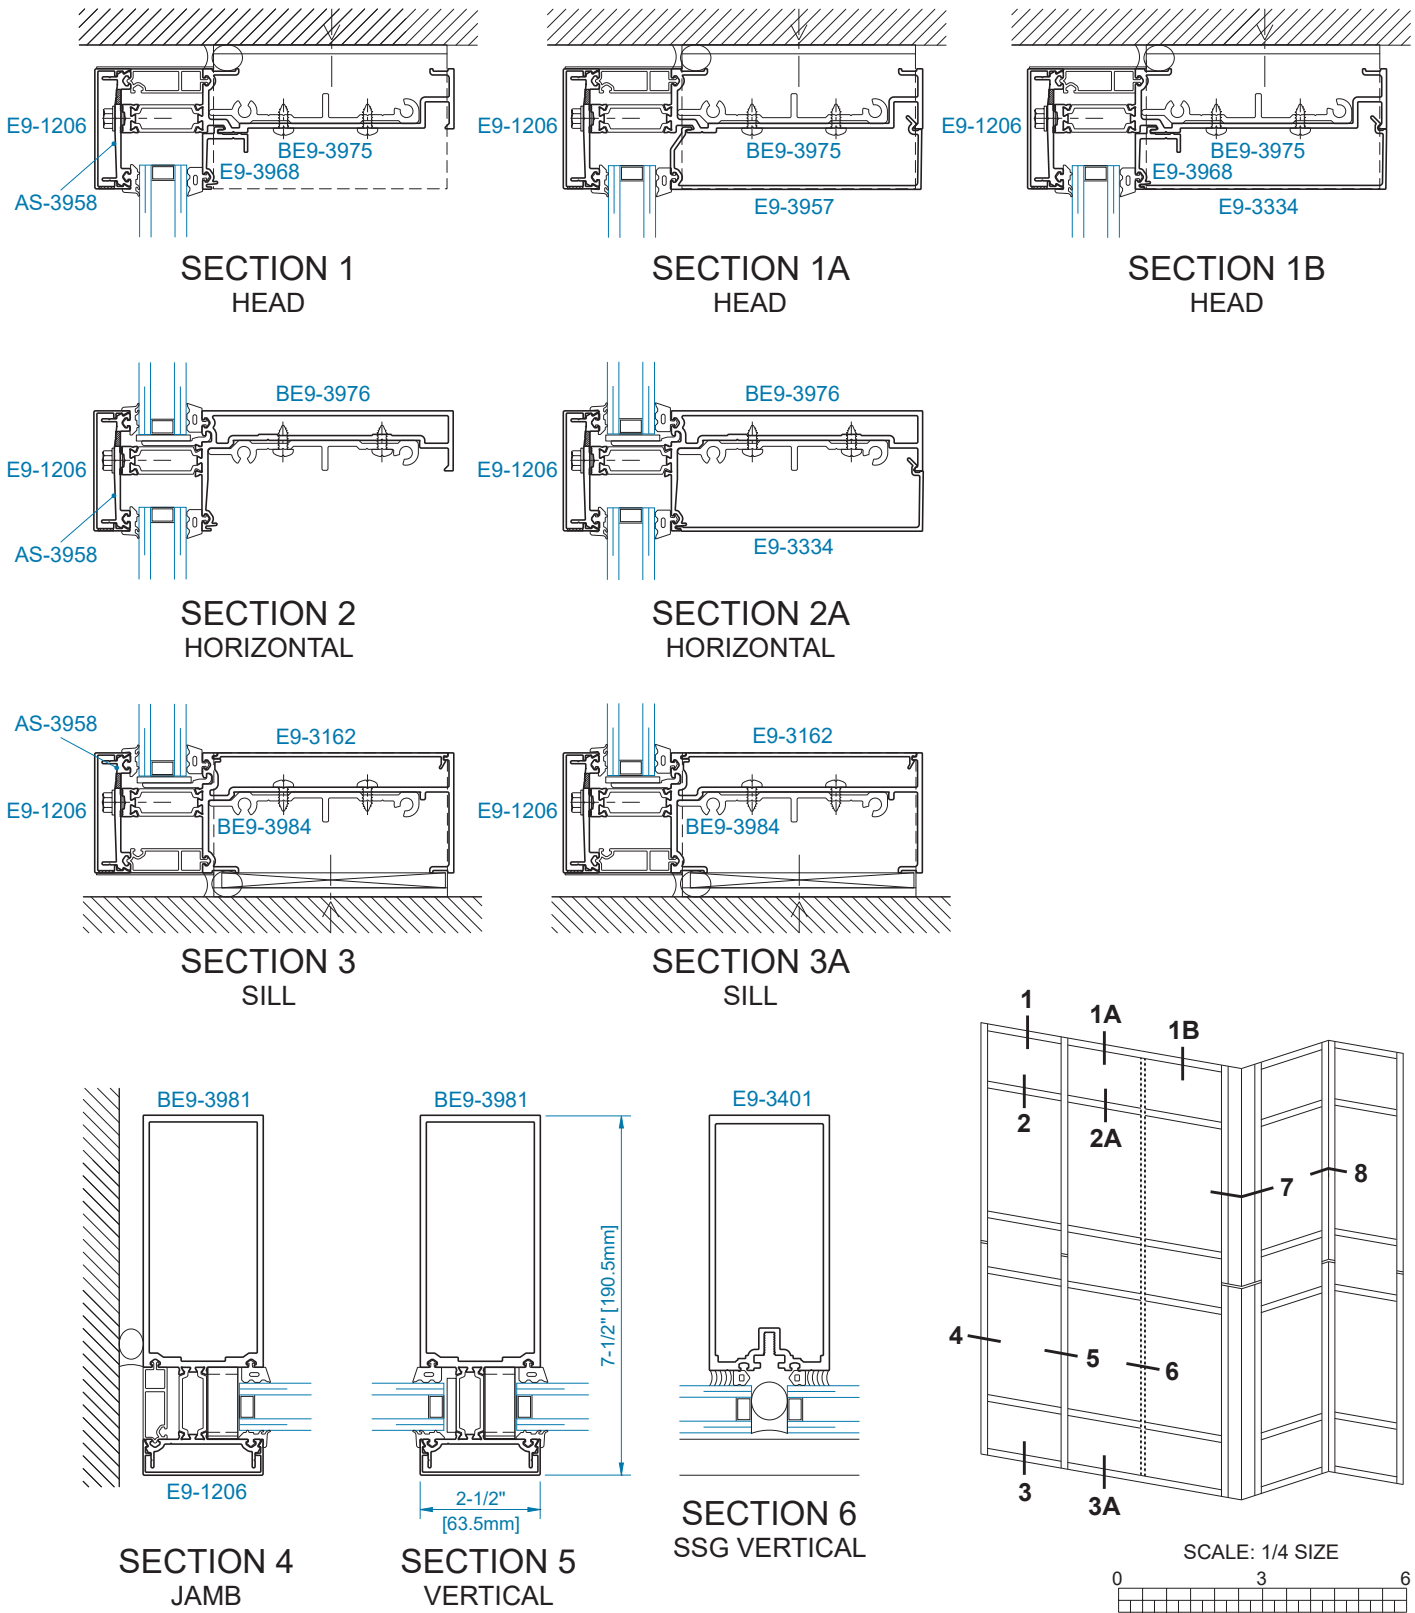







WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

DEFLECTION CRITERIA AAMA TIR-A11 - $L/175$ or $L/240 + 1/4"$ (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)
CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN $3/4"$ (19.1mm)




ALLOWABLE WIND LOAD STRESS

YKK AP tested standard. Contact YKK AP for more information.




These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span.
For other applications, please contact YKK AP engineers at 1-866-955-2732.

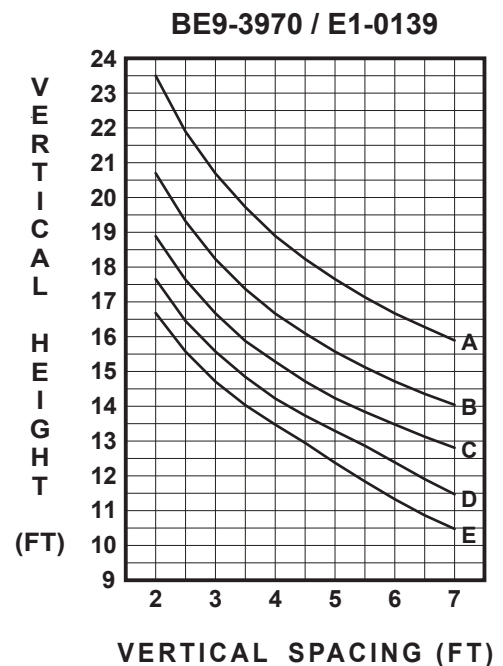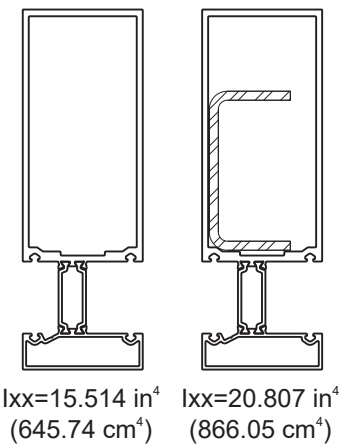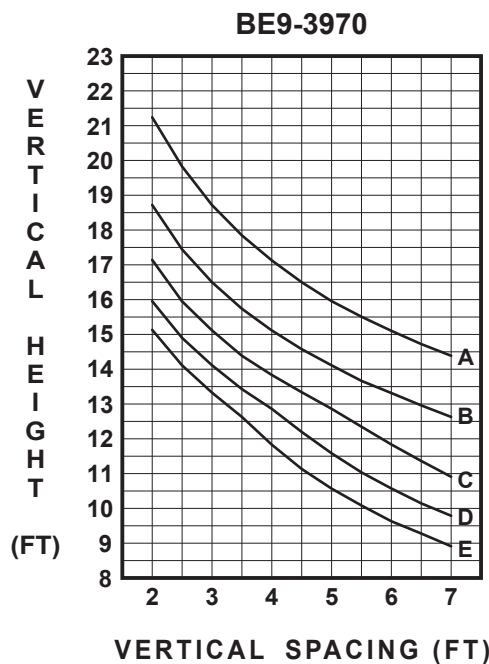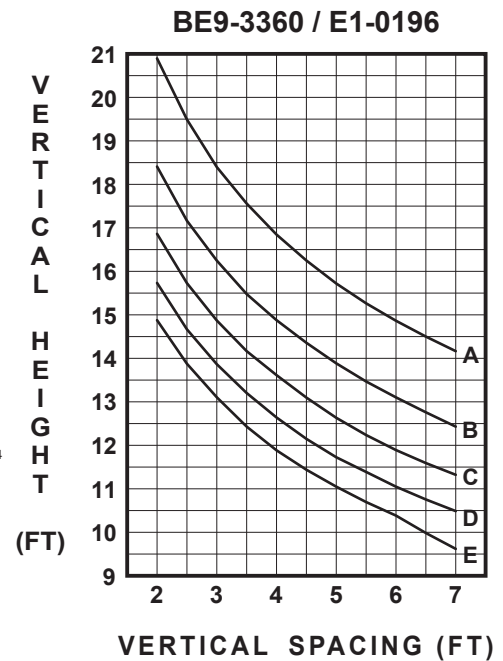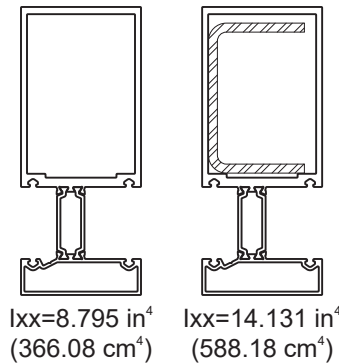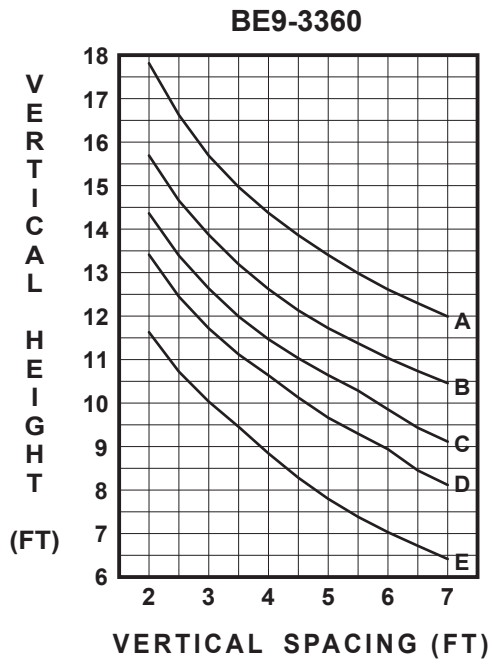




WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

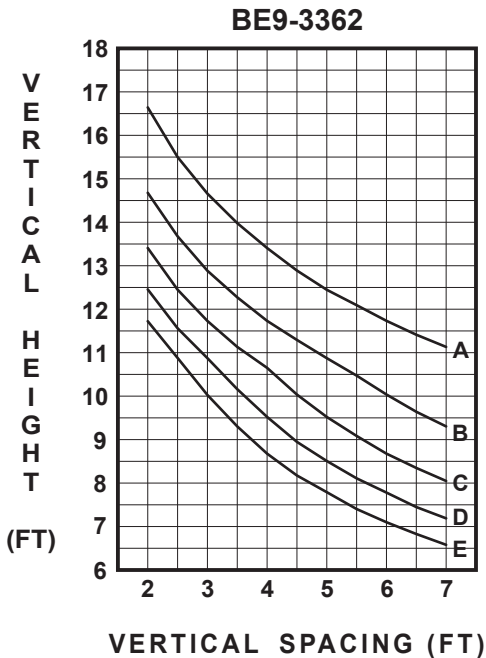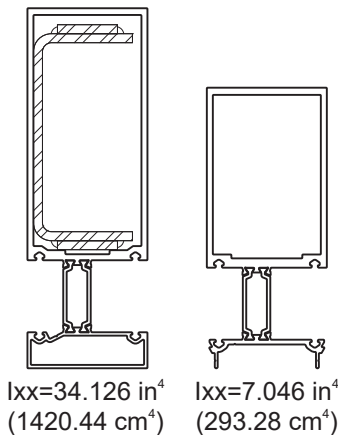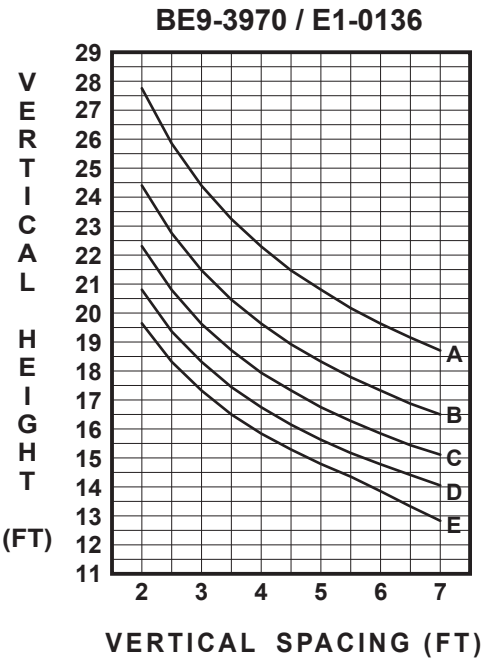

A=20 PSF (960 Pa)
B=30 PSF (1440 Pa)
C=40 PSF (1920 Pa)
D=50 PSF (2390 Pa)
E=60 PSF (2870 Pa)

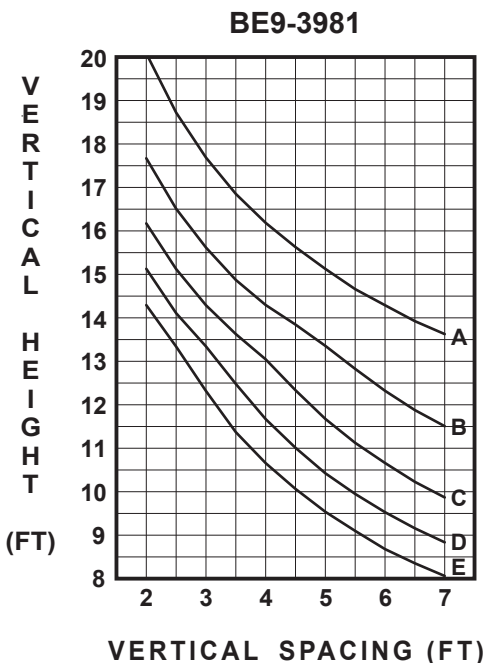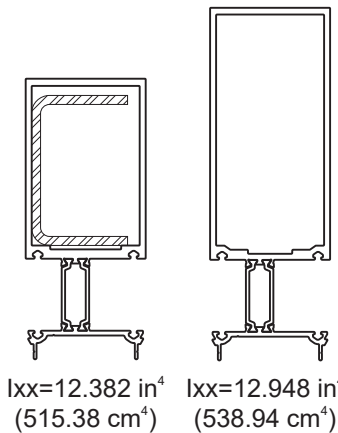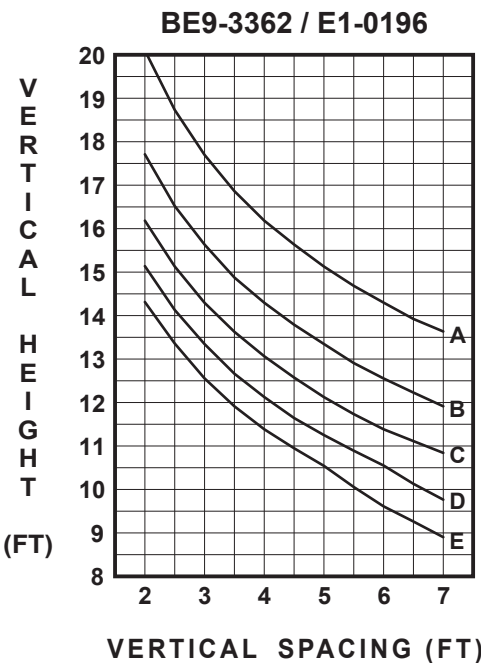

WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

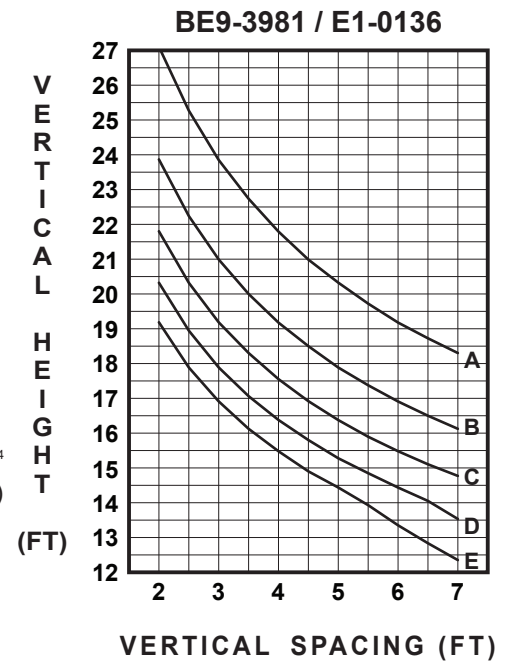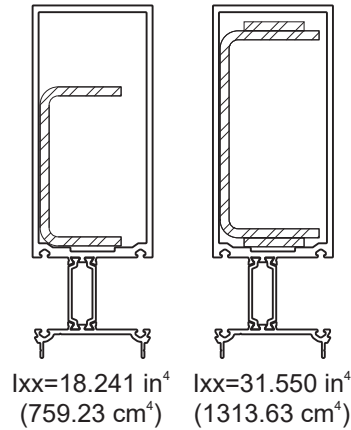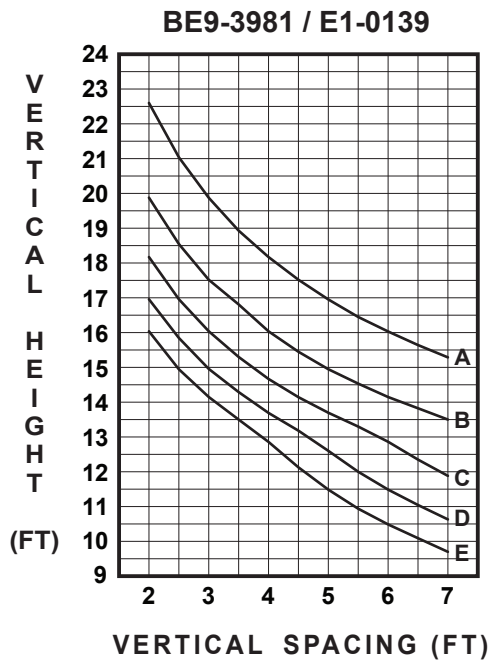

A=20 PSF (960 Pa)
 B=30 PSF (1440 Pa)
 C=40 PSF (1920 Pa)
 D=50 PSF (2390 Pa)
 E=60 PSF (2870 Pa)