



TABLE OF CONTENTS

YCW 750 OGP OUTSIDE GLAZED THERMALLY BROKEN
CURTAIN WALL SYSTEM
FOR 1” GLAZING


PICTORIAL VIEWS Pages 2 to 4

TYPICAL MID ANCHORS Page 5


FRAMING MEMBERS..... Pages 6 to 8
FOR 1” GLAZING (1/4 SIZE)

WIND LOAD CHARTS Pages 9 & 10


*The latest installation instructions for this product are available at www.ykkap.com.

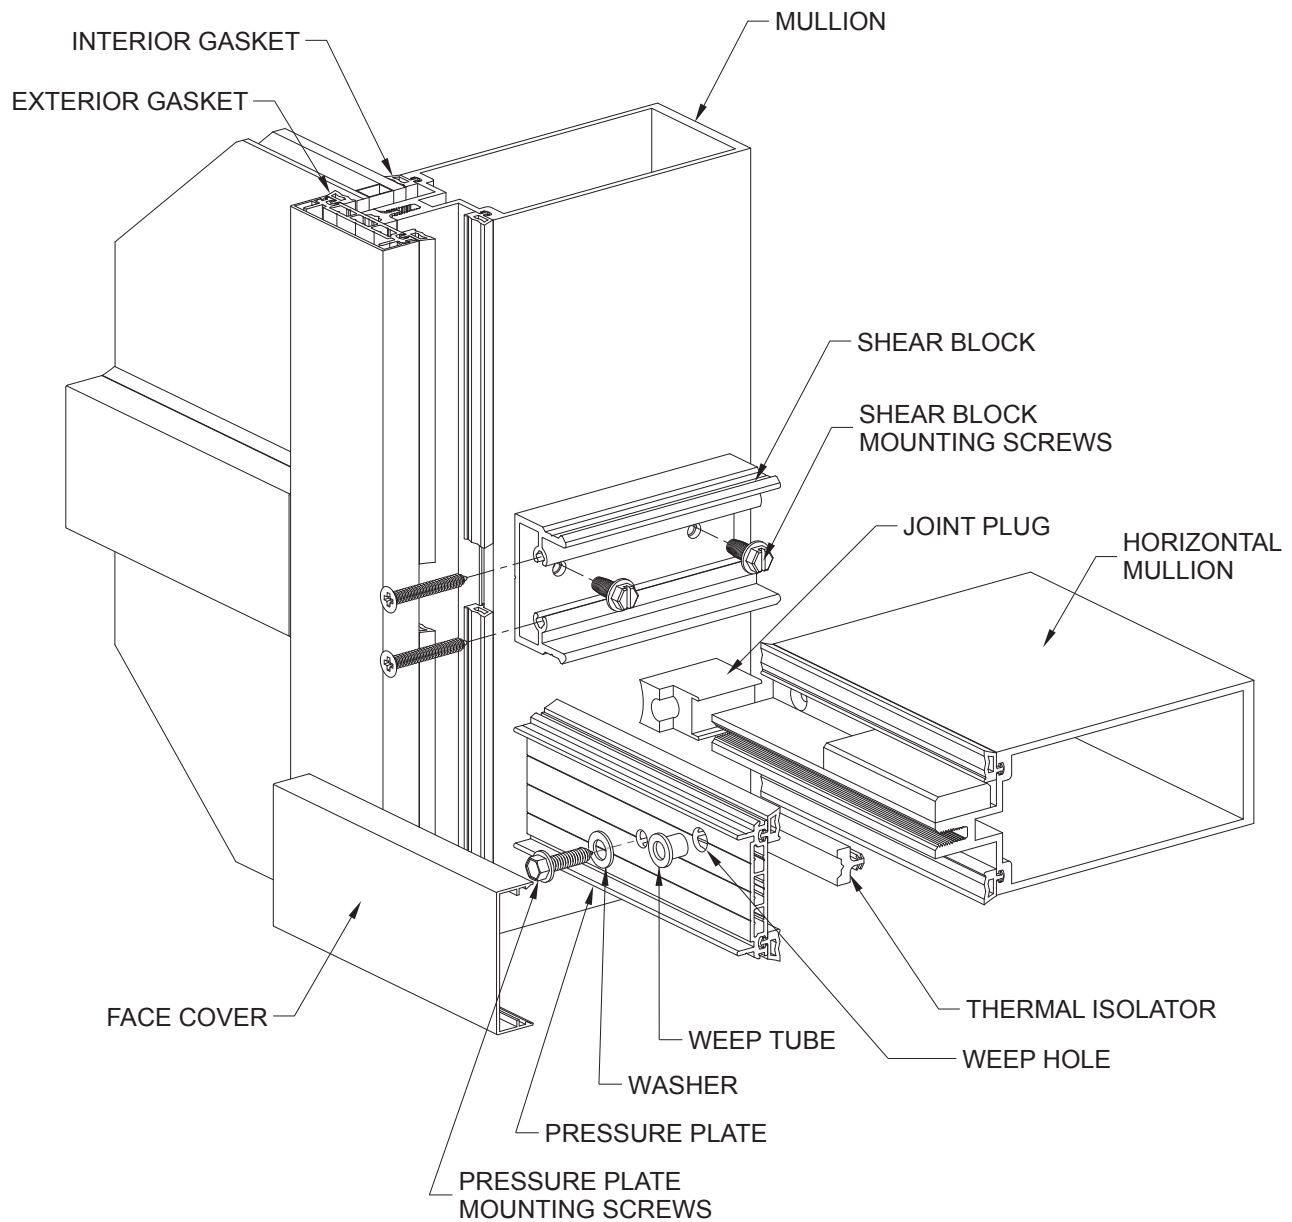


TYPICAL SPLICE CONDITION

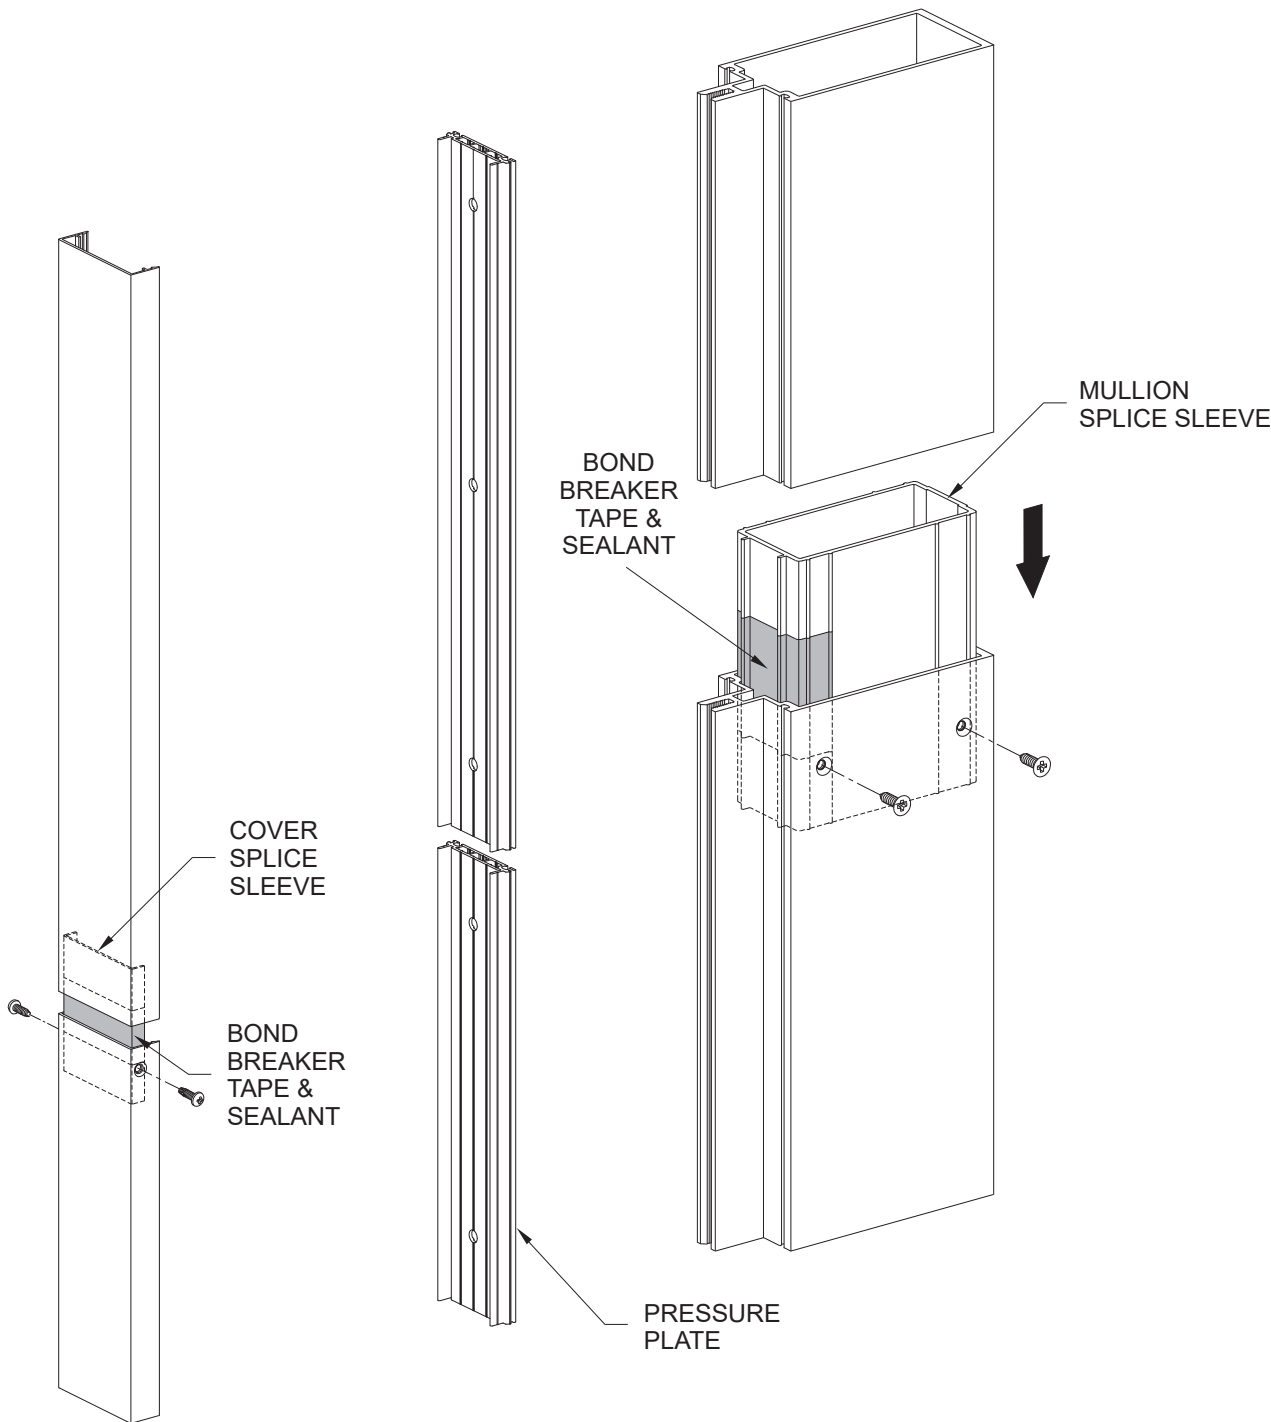


VERTICAL MULLION WITH “T” END ANCHOR

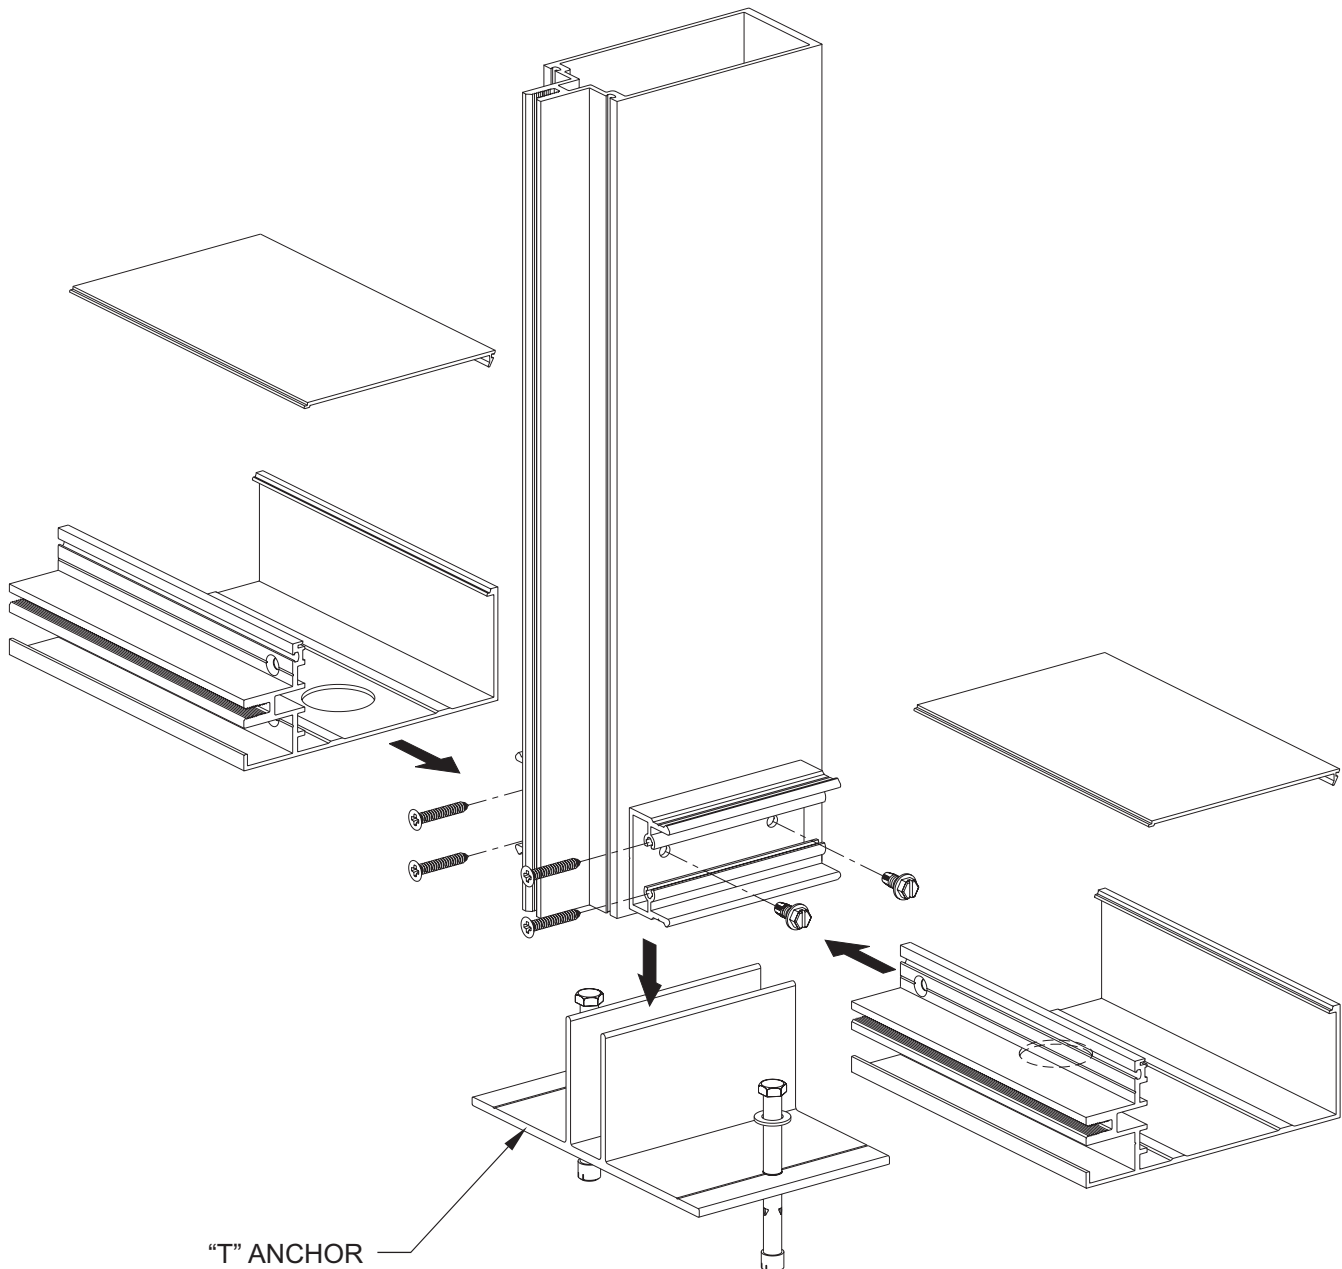


TYPICAL MID ANCHORS FOR WIND LOAD & DEAD LOAD

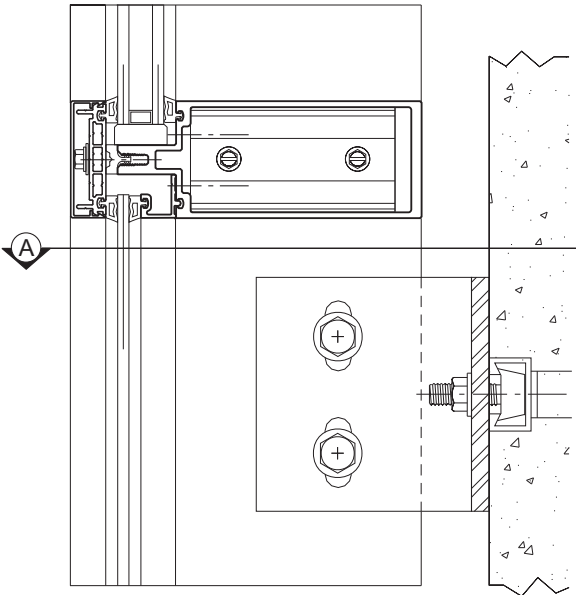


TYPICAL WIND LOAD ANCHOR

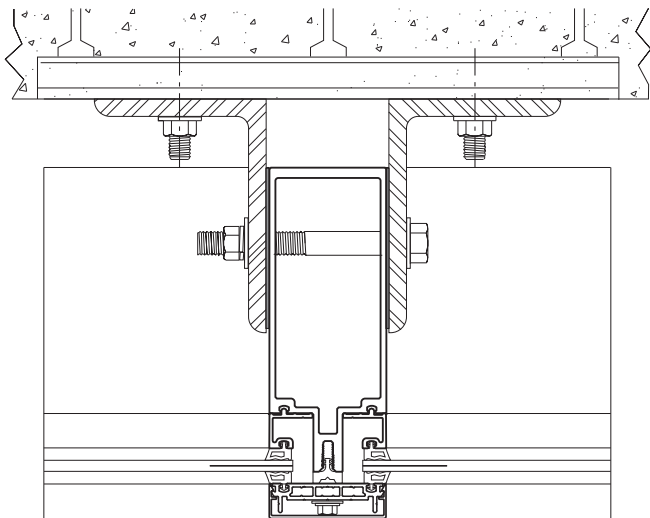


SECTION A

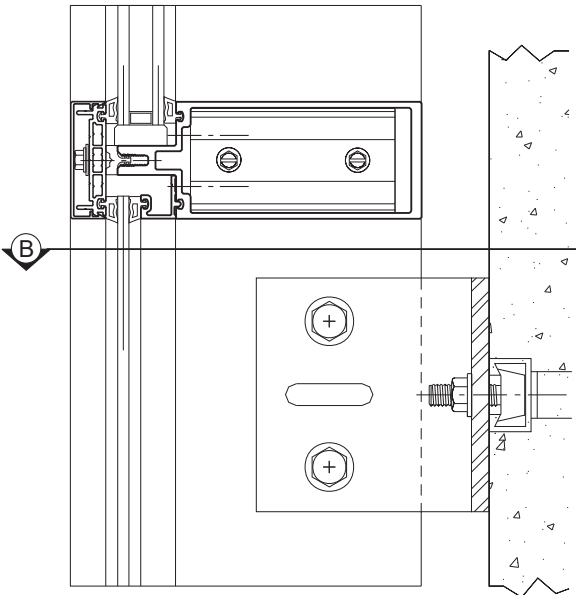


TYPICAL DEAD LOAD ANCHOR

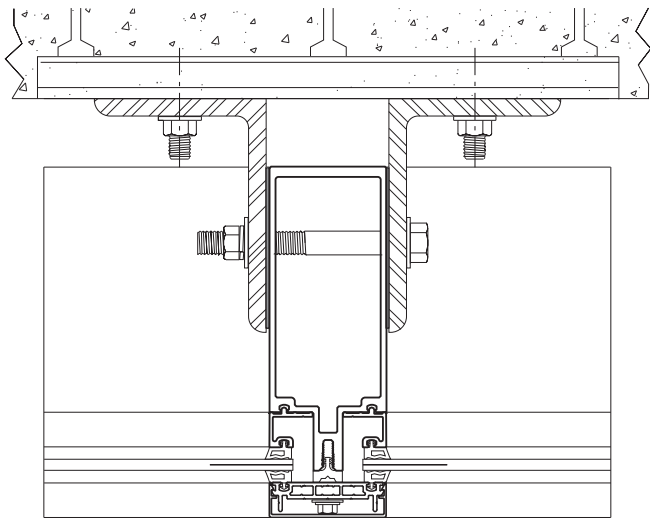


SECTION B





STANDARD FRAMING MEMBERS

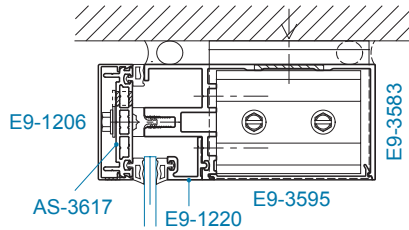


SECTION 1
OPEN BACK HEAD
(1/4" Gl.)




SECTION 1A
INCIDENTAL WATER HEAD
(1" Gl.)

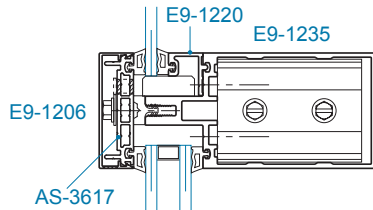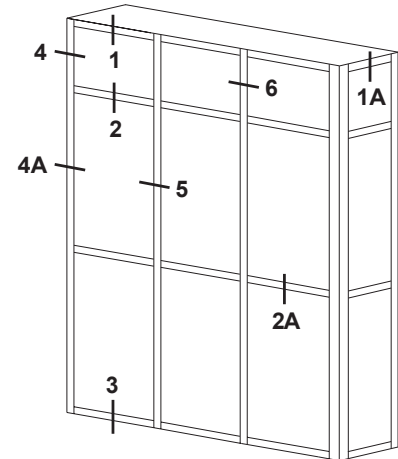


SECTION 2
HORIZONTAL
(1/4" Gl./1" Gl.)

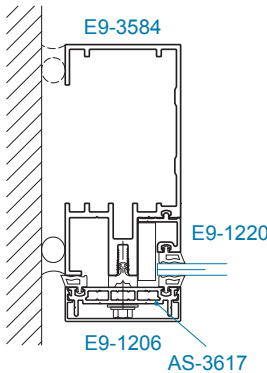


SECTION 4
OPEN BACK JAMB
(1/4" Gl.)

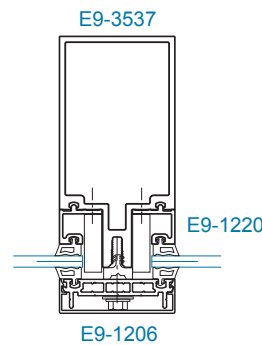


SECTION 5
HEAVY DUTY
VERTICAL (1/4" Gl.)

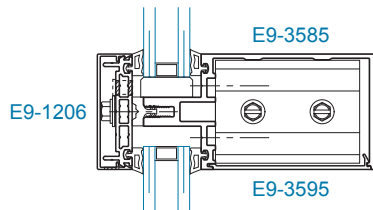


SECTION 2A
OPEN BACK HORIZONTAL
(1" Gl./1" Gl.)

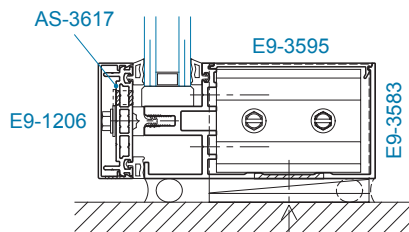

SECTION 3
OPEN BACK SILL
(1" Gl.)

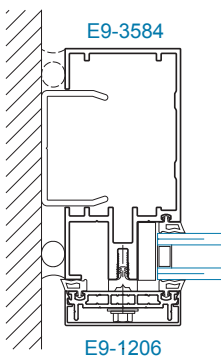

SECTION 4A
OPEN BACK JAMB
w/ JAMB ANCHOR
CLIP (1" Gl.)

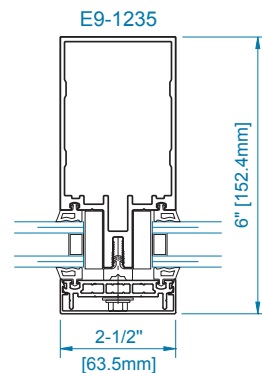


SECTION 6
VERTICAL
(1" Gl.)


See YCW 750 OG or YCW 750 XT for options to handle splayed and corner mullions.

Door framing member details can be found in the YCW 750 OG section of the Design Manual.


SCALE: 1/4 SIZE





STANDARD FRAMING MEMBERS

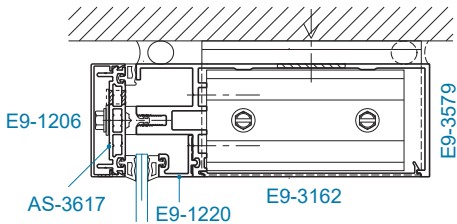


SECTION 1
OPEN BACK HEAD
(1/4" Gl.)

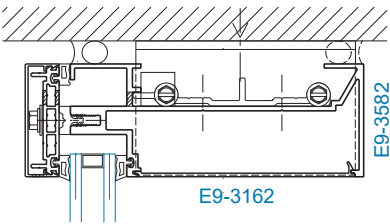


SECTION 1A
INCIDENTAL WATER HEAD
(1" Gl.)

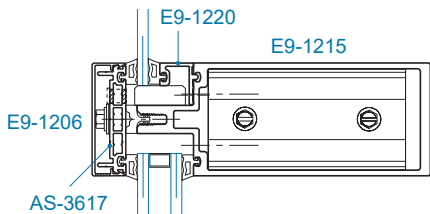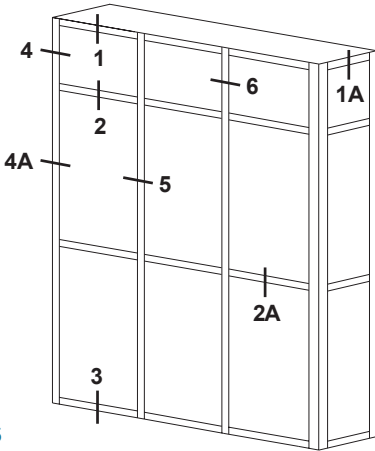


SECTION 2
HORIZONTAL
(1/4" Gl./1" Gl.)

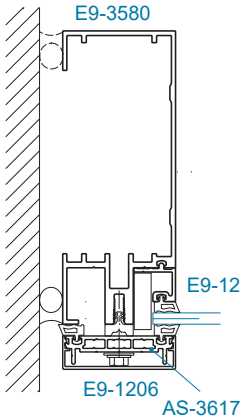


SECTION 4
OPEN BACK JAMB
(1/4" Gl.)

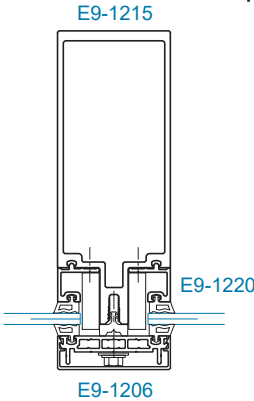


SECTION 5
HEAVY DUTY
VERTICAL (1/4" Gl.)

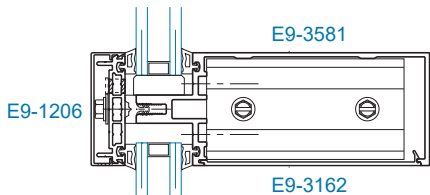


SECTION 2A
OPEN BACK HORIZONTAL
(1" Gl./1" Gl.)

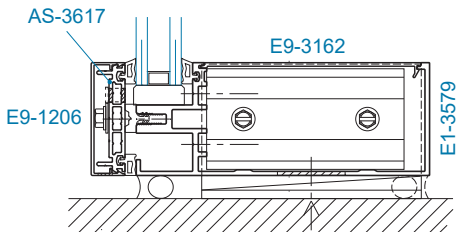

SECTION 3
OPEN BACK SILL
(1" Gl.)

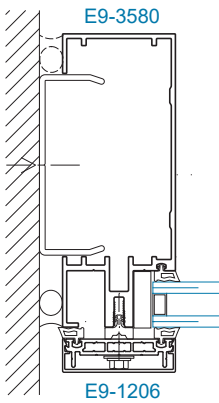


SECTION 4A
OPEN BACK JAMB
w/ JAMB ANCHOR
CLIP (1" Gl.)

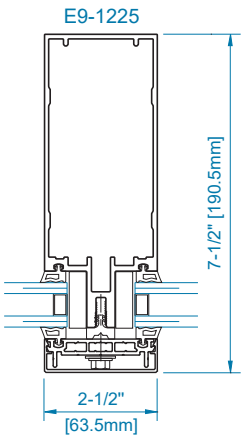


SECTION 6
VERTICAL
(1" Gl.)

See YCW 750 OG or
YCW 750 XT for options
to handle splayed and
corner mullions.



Door framing member
details can be found in
the YCW 750 OG section
of the Design Manual.




DOOR FRAMING MEMBERS

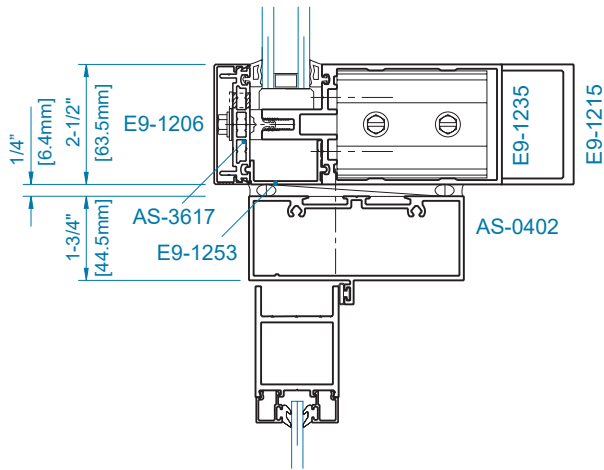


SECTION 7
TRANSOM BAR

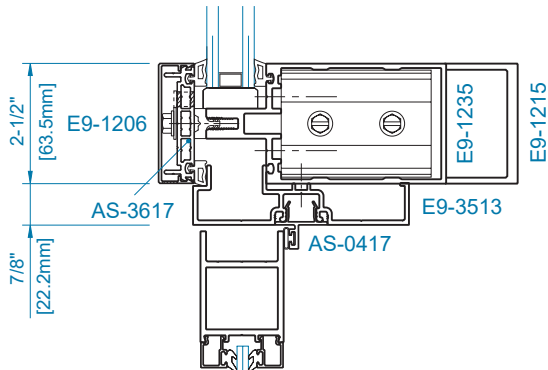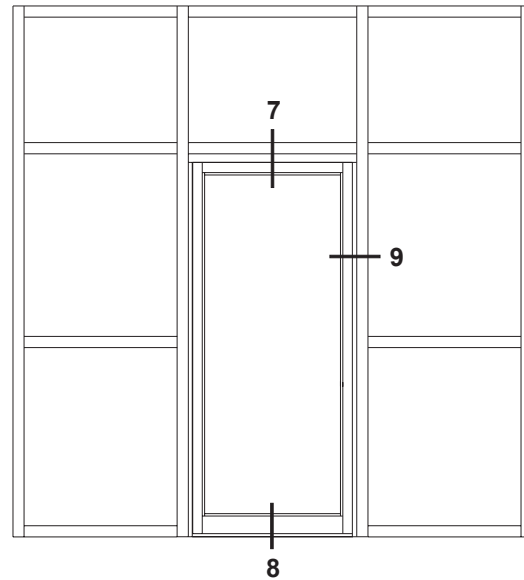


SECTION 7A
OPTIONAL TRANSOM BAR
(Limited Hardware Applications)

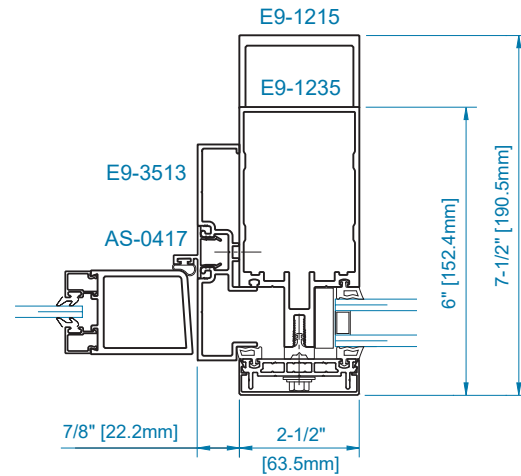


SECTION 9
DOOR JAMB

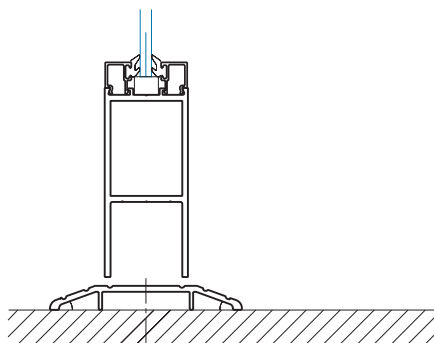

SECTION 8
BOTTOM RAIL



WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

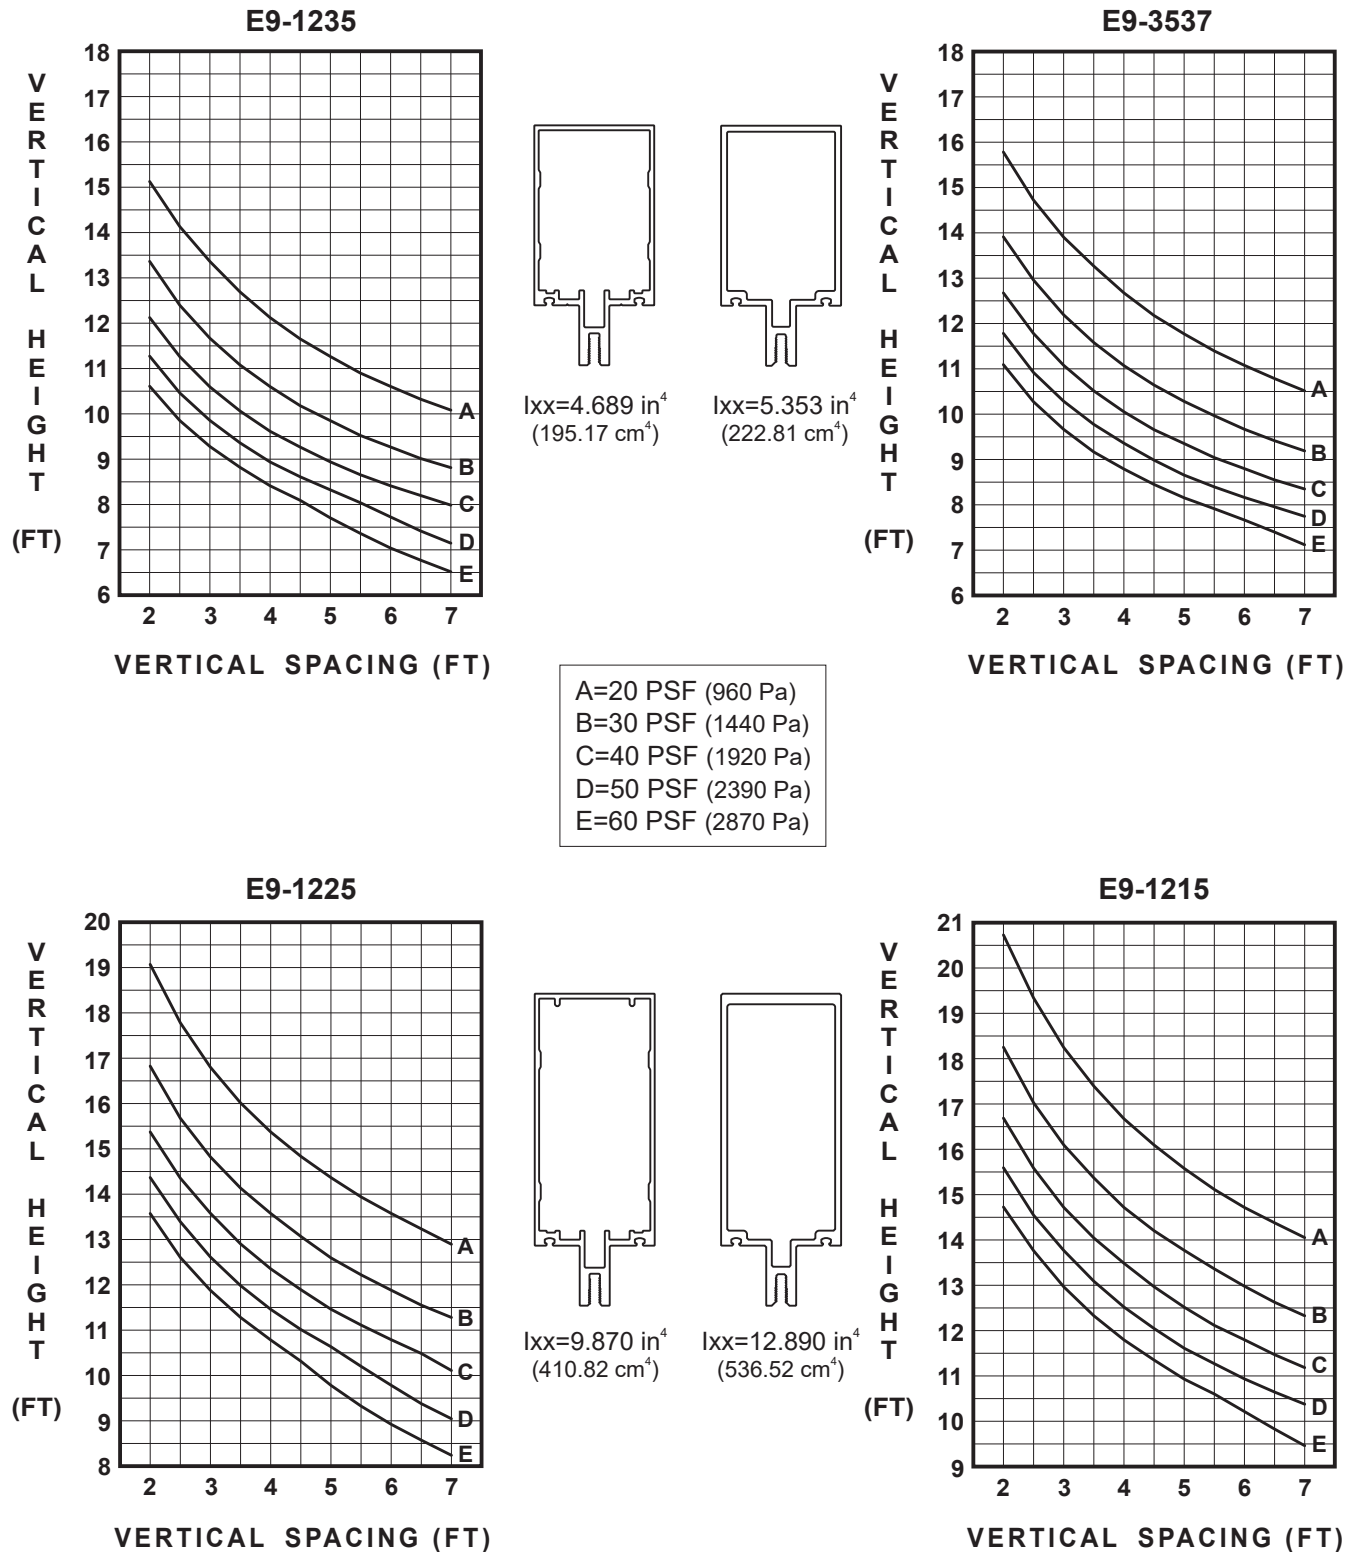

WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

