



TABLE OF CONTENTS

YCW 752 OGP OUTSIDE GLAZED CURTAIN WALL SYSTEM
FOR 1” GLAZING

PICTORIAL VIEW..... Page 2


FRAMING MEMBERS..... Pages 3 & 4
FOR 1” GLAZING

DOOR FRAMING MEMBERS..... Page 5
FOR 1” GLAZING


WIND LOAD CHARTS..... Page 6

*The latest installation instructions for this product are available at www.ykkap.com.


YCW 752 OGP Outside Glazed Curtain Wall System

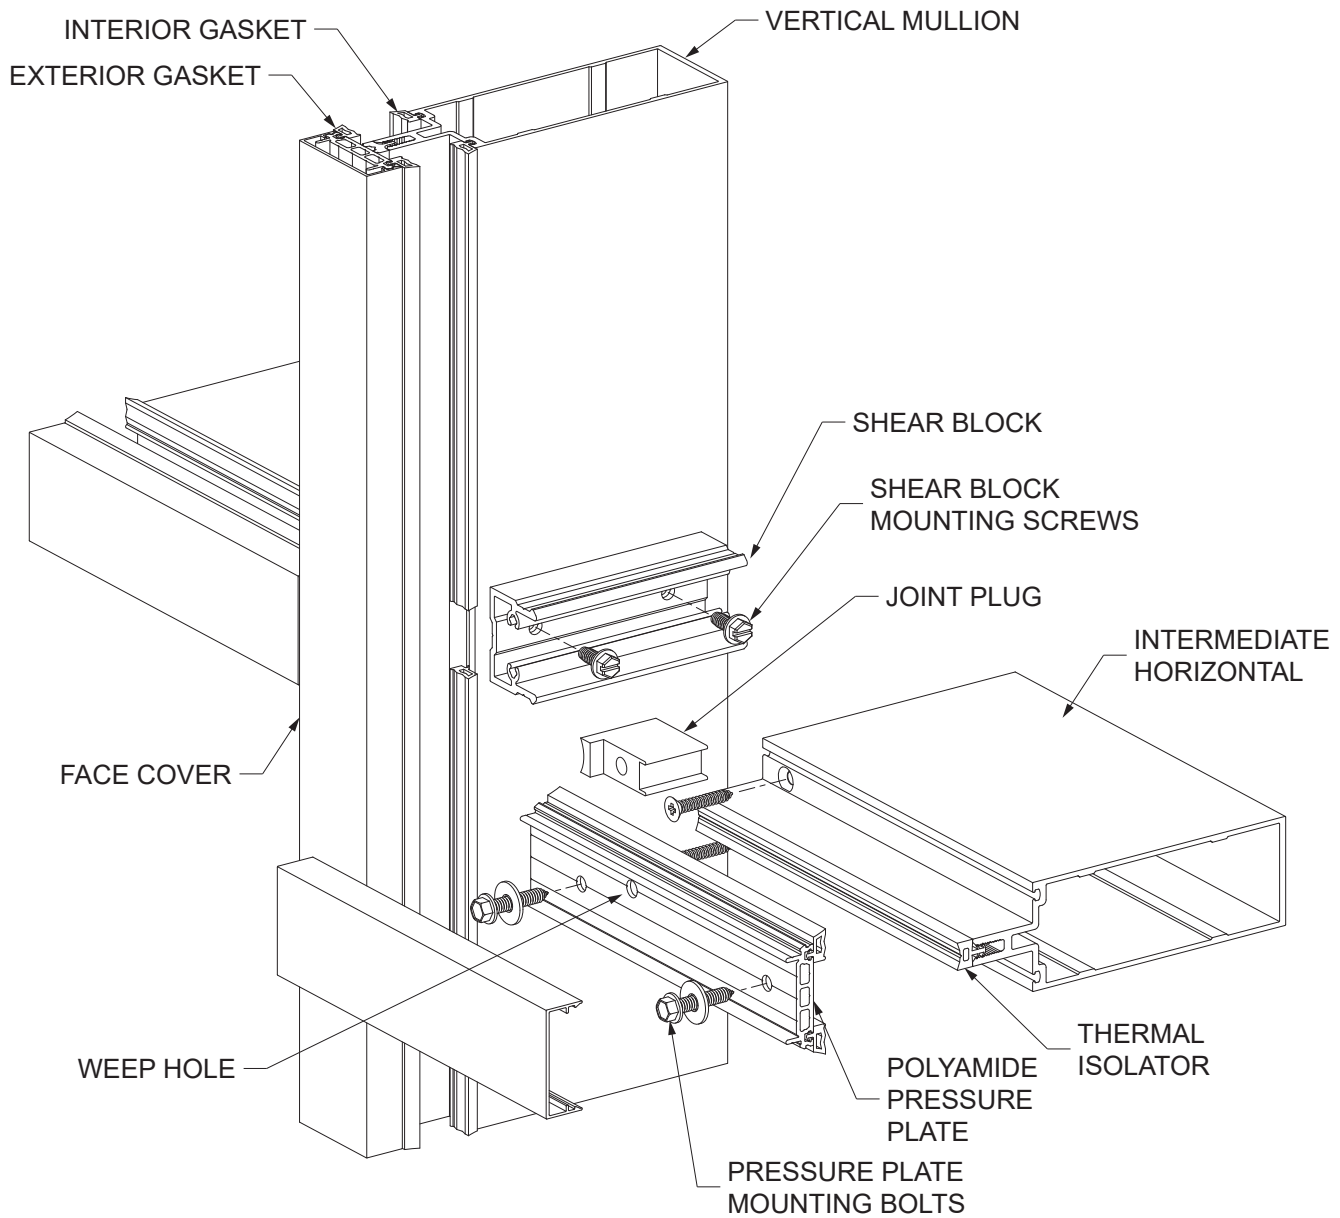


YCW 752 OGP Framing Members for 1" Glazing

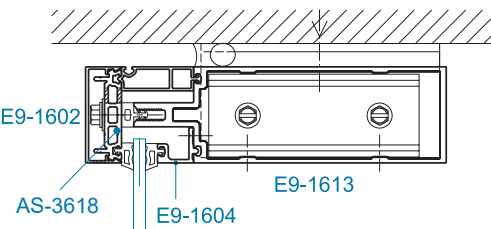


SECTION 9
HEAD

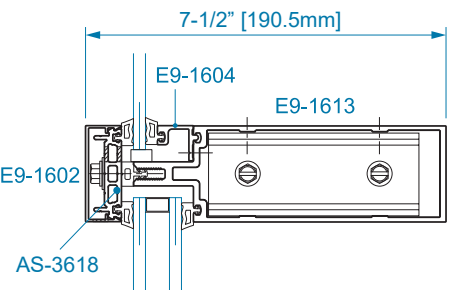


SECTION 10
HORIZONTAL

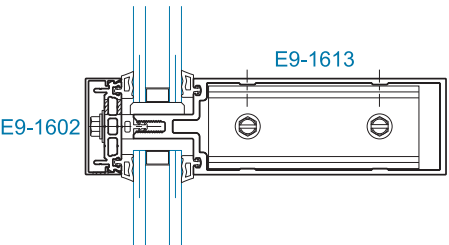


SECTION 11
HORIZONTAL

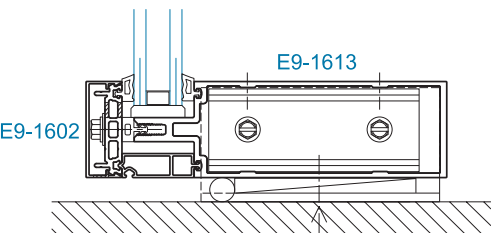


SECTION 12
SILL

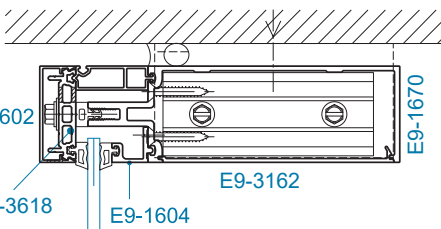


SECTION 9A
2 PC. HEAD w/
CONCEALED FASTENER
SHEAR BLOCK

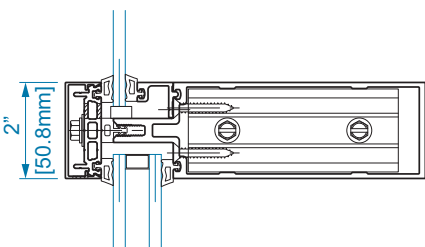


SECTION 10A
HORIZONTAL w/
CONCEALED FASTENER
SHEAR BLOCK

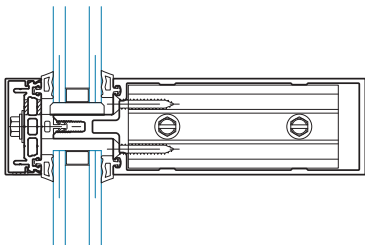


SECTION 11A
HORIZONTAL w/
CONCEALED FASTENER
SHEAR BLOCK

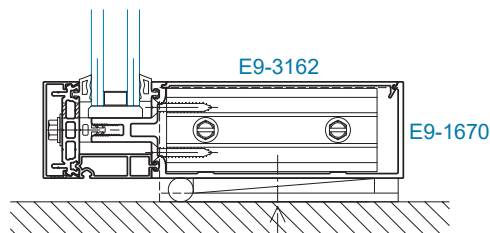


SECTION 12A
2 PC. SILL w/
CONCEALED FASTENER
SHEAR BLOCK

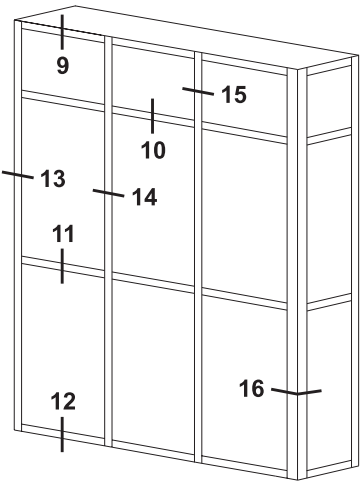


SCALE: 1/4 SIZE





YCW 752 OGP Framing Members for 1" Glazing

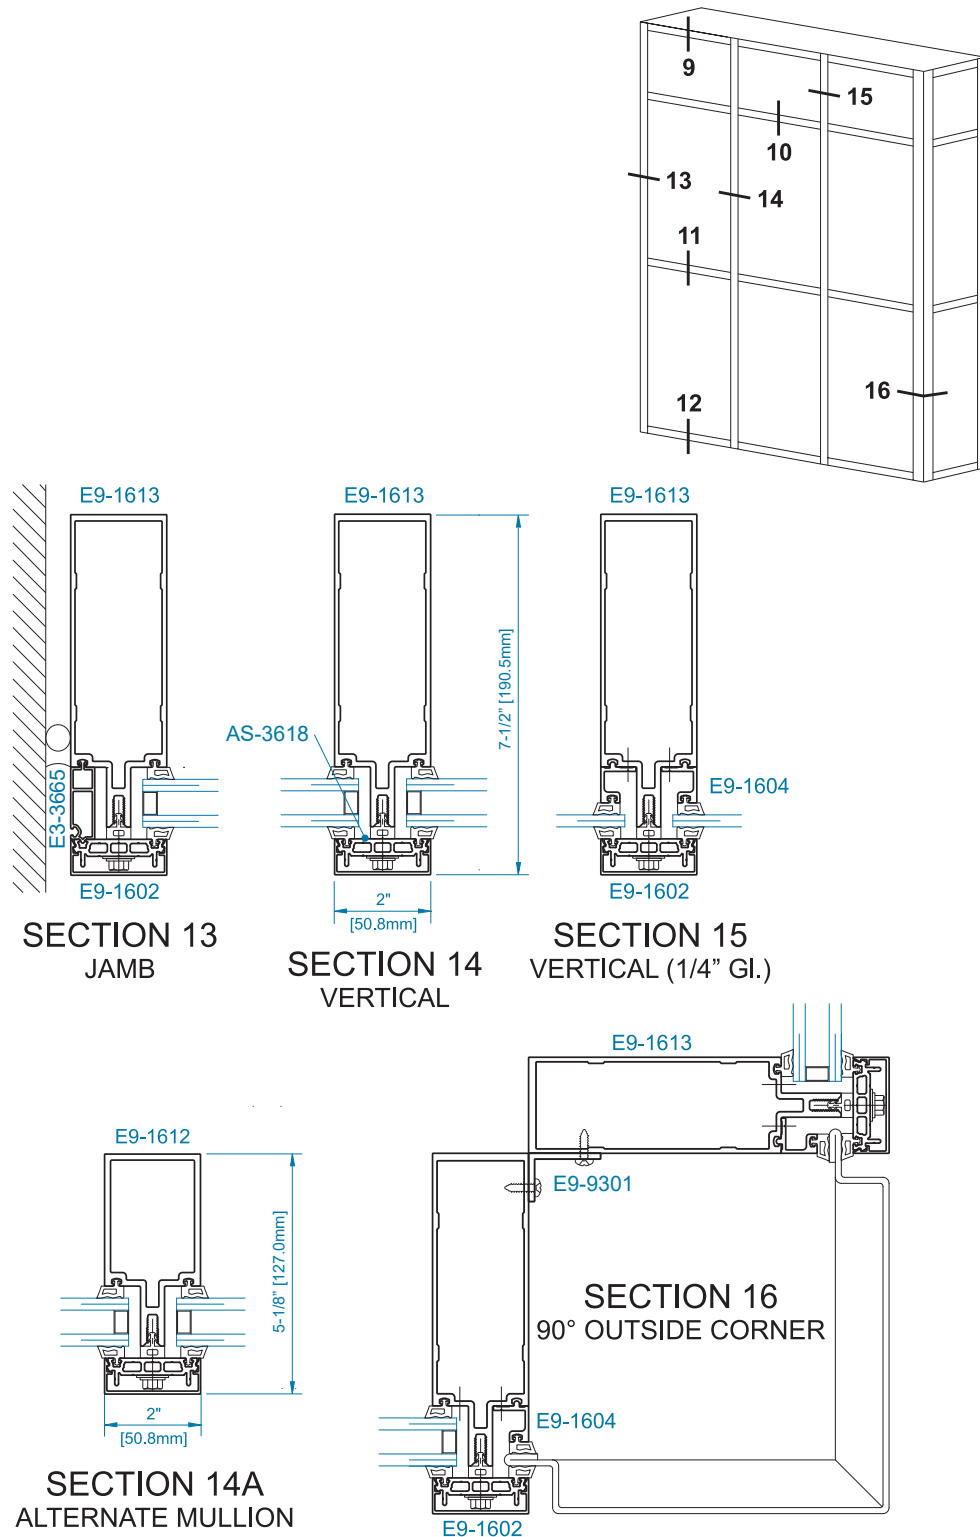


YCW 752 OGP Door Framing Members for 1" Glazing

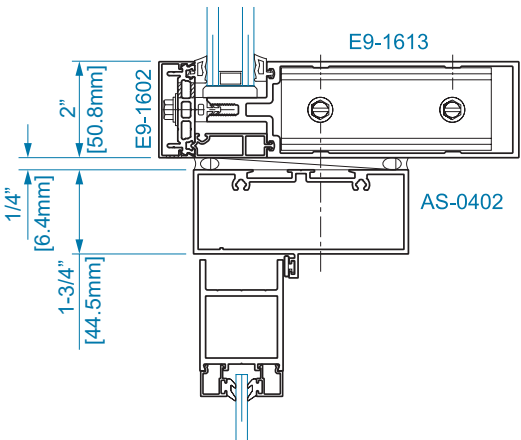


SECTION 17
TRANSOM BAR

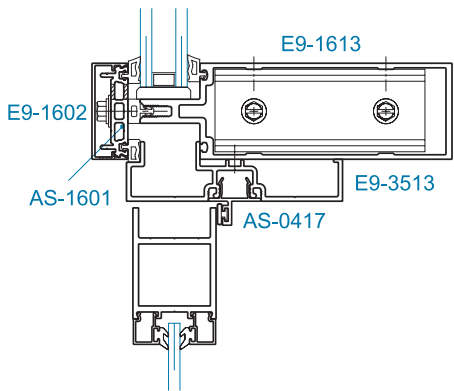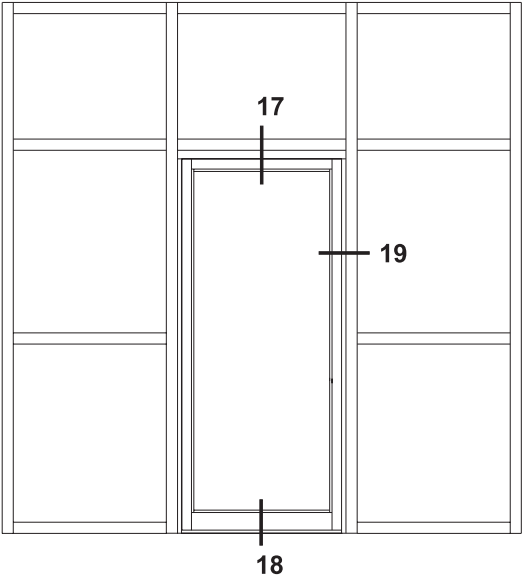

SECTION 17A
OPTIONAL TRANSOM BAR
(Limited Hardware Applications)

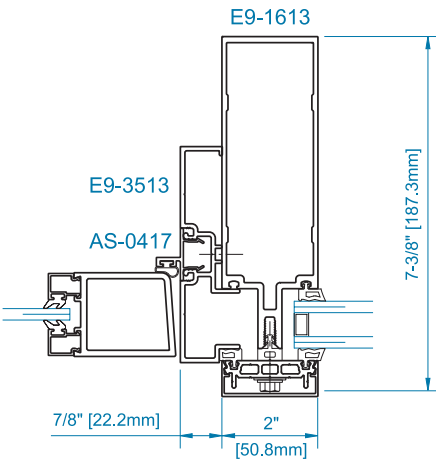


SECTION 19
DOOR JAMB

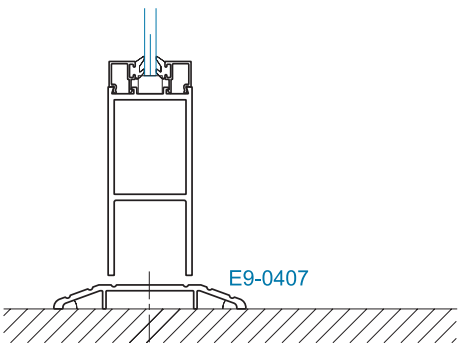

SECTION 18
BOTTOM RAIL

SCALE: 1/4 SIZE



WIND LOAD CHARTS FOR SINGLE SPAN APPLICATIONS

DEFLECTION CRITERIA AAMA TIR-A11 - L/175 or L/240 + 1/4" (6.4mm) - FOR SPANS GREATER THAN 13'-6" (4.1m) BUT LESS THAN 40'-0" (12.2m)
CODES AND SPECIFICATIONS MAY VARY, NO SINGLE LITE OF GLASS SHALL DEFLECT MORE THAN 3/4" (19.1mm)

ALLOWABLE WIND LOAD STRESS

YKK AP tested standard. Contact YKK AP for more information.

These charts include unbraced length analysis and are based off at least one horizontal being placed at the midpoint of the span.
For other applications, please contact YKK AP engineers at 1-866-955-2732.

