

TABLE OF CONTENTS

**YOW 350 T THERMAL HEAVY WALL OPERABLE WINDOW
3-1/2" DEPTH**

STANDARD WINDOW CONFIGURATIONS Page 2 & 3

FIXED WINDOW DETAILS (1/4 SIZE) Page 4

CASEMENT OUTSWING DETAILS (1/4 SIZE)..... Pages 5 to 14

CASEMENT INSWING DETAILS (1/4 SIZE) Pages 15 to 17

PROJECT OUT DETAILS (1/4 SIZE) Pages 18 to 24

PROJECT IN DETAILS (1/4 SIZE)..... Pages 25 to 29

GLAZING OPTIONS (1/4 SIZE) Pages 30 to 32

MULLION OPTIONS (1/4 SIZE)..... Pages 33 to 38

RECEPTOR SYSTEM & ADDITIONAL ANCHORING

DETAILS (1/4 SIZE)..... Page 39

SILL OPTIONS (1/4 SIZE) Page 40

ACCESSORIES (1/4 SIZE)..... Page 41

SCREEN OPTIONS AND DETAILS (1/4 SIZE)..... Pages 42 to 49

TECHNICAL NOTES Pages 50 to 59


ACCESS PANEL HANDING Page 60

HARDWARE OPTIONS Pages 61 to 62


*The latest installation instructions for this product are available at www.ykkap.com.

YOW 350 T WINDOW VARIATIONS

FIXED

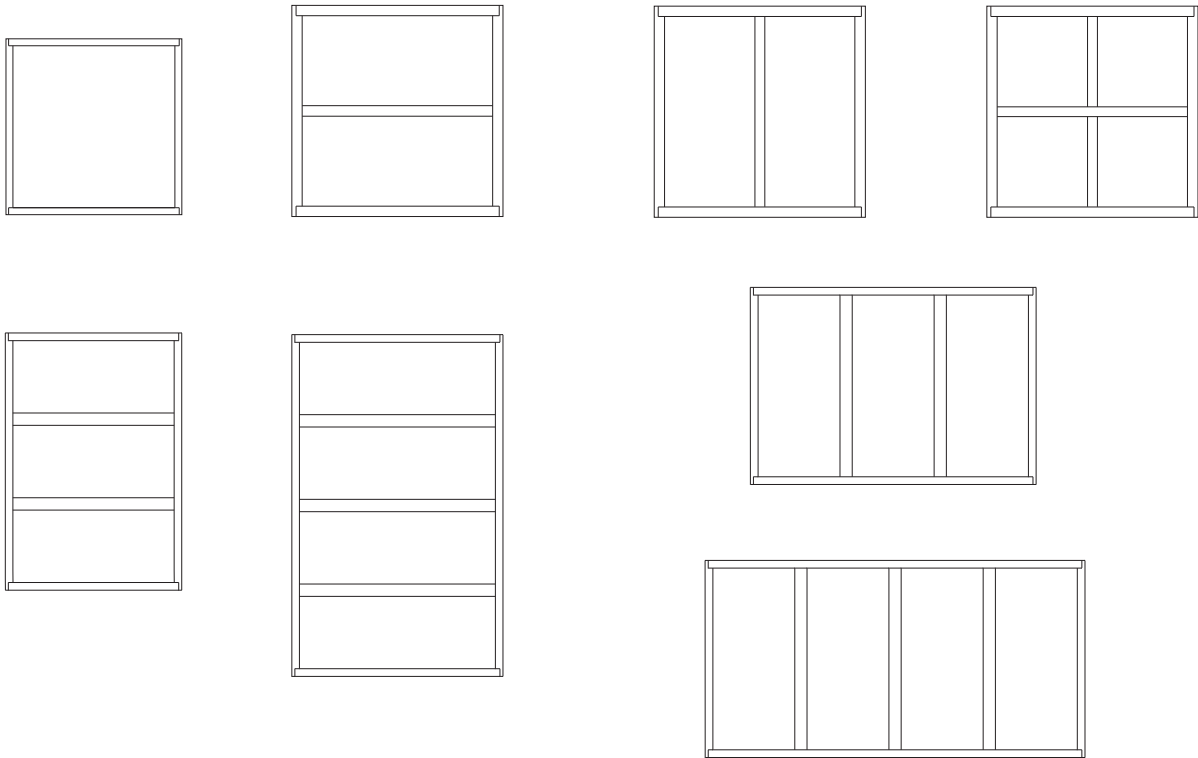


CASEMENT




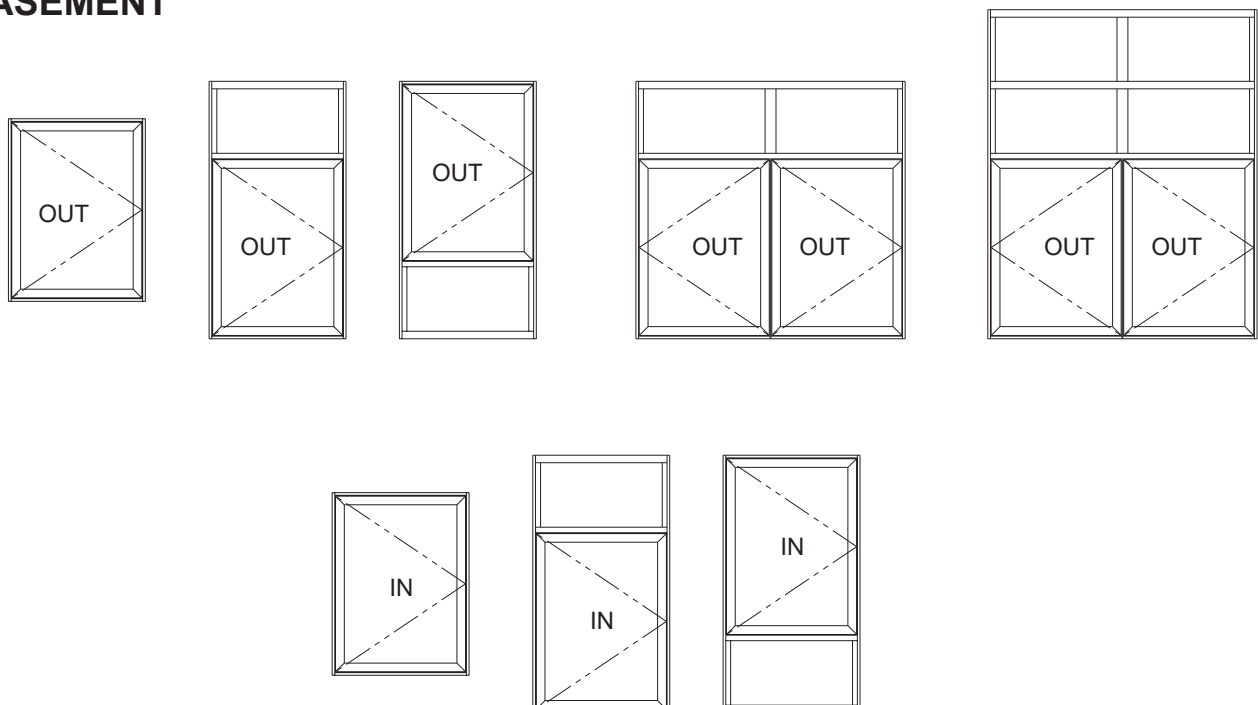


YOW 350 T WINDOW VARIATIONS



PROJECT

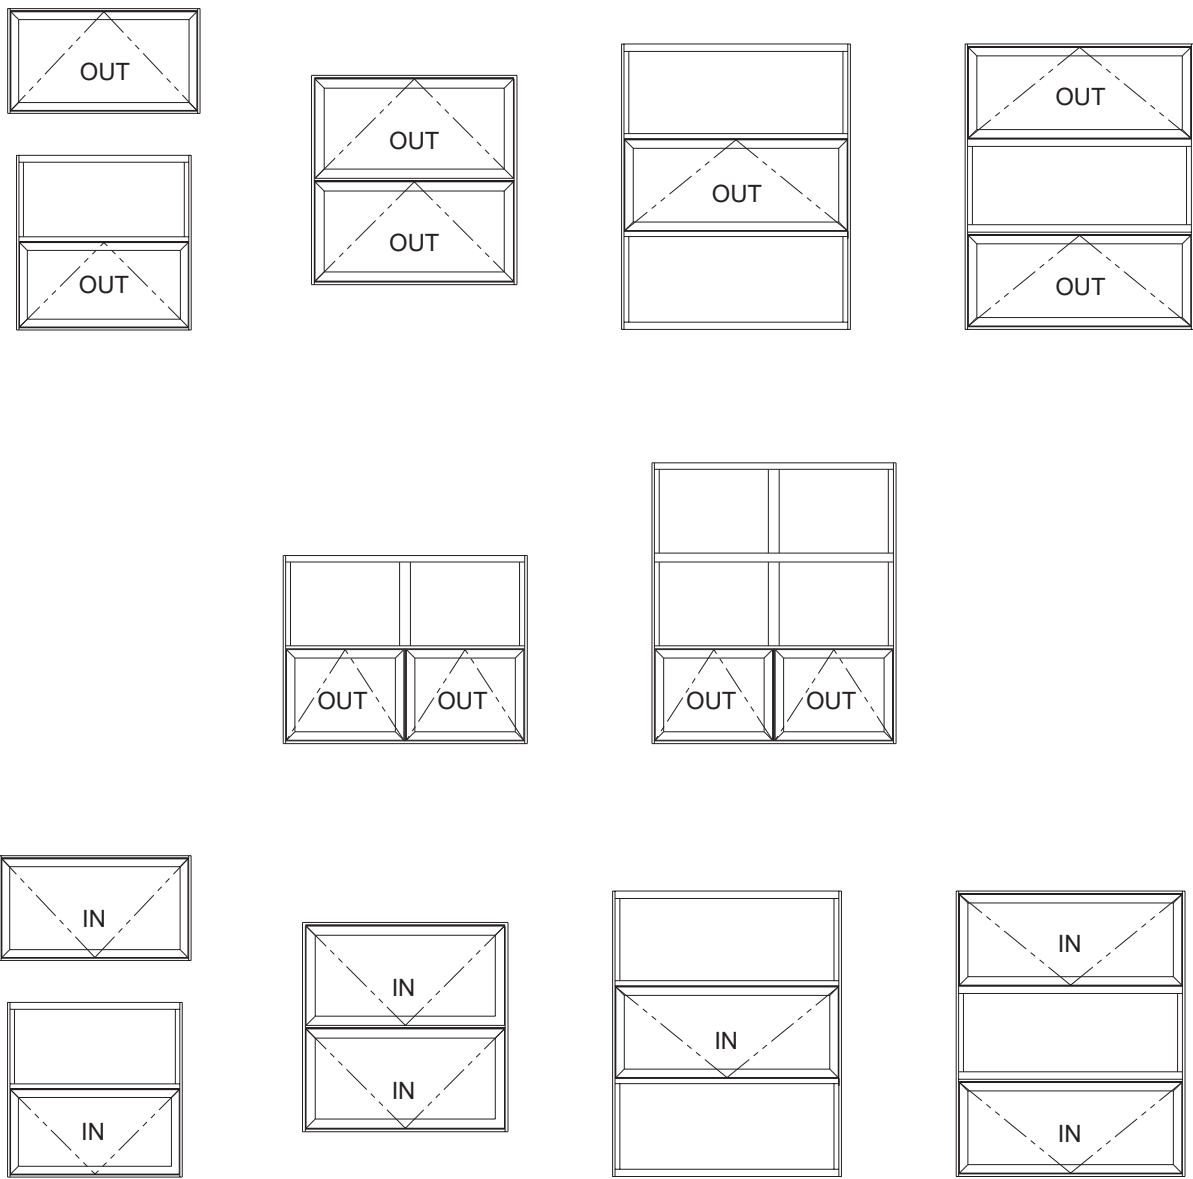


FIXED

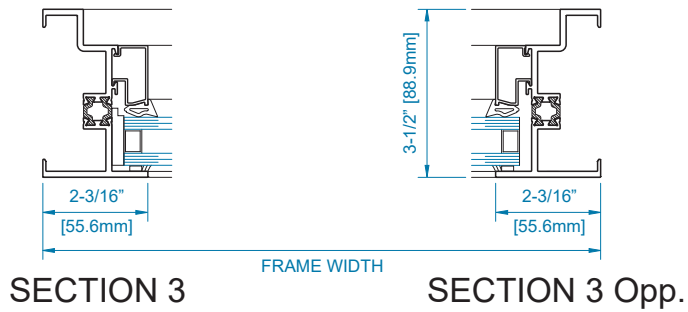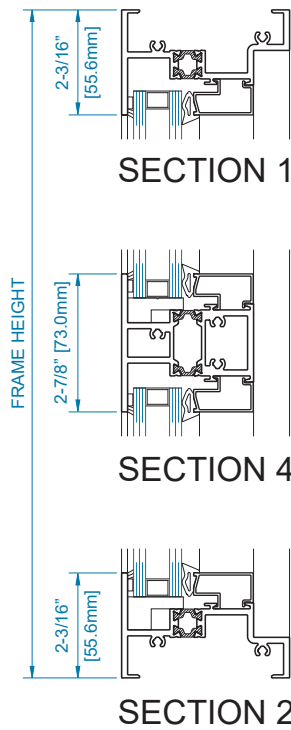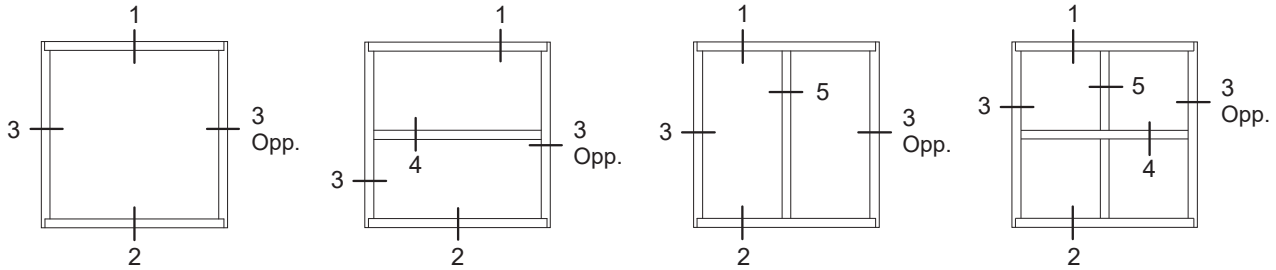

CASEMENT OUTSWING (4-BAR HINGE)

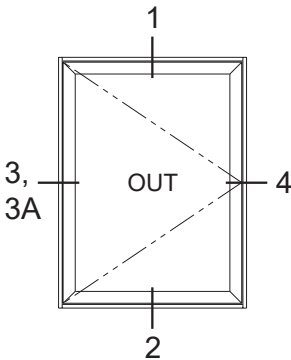


SECTION 1

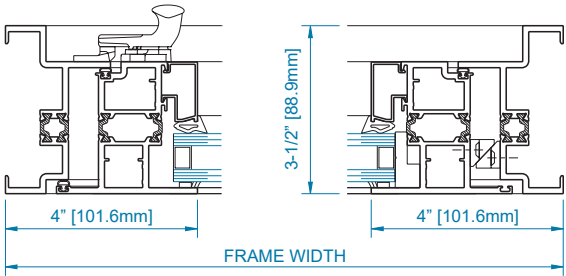


SECTION 3


SECTION 4





SECTION 2




SECTION 3A
With Optional
Multi-Lock




CASEMENT OUTSWING (BUTT HINGE)

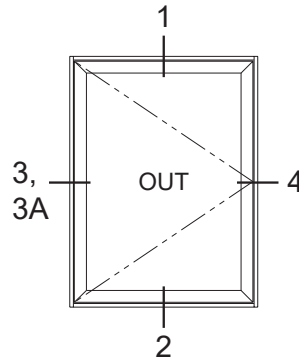


SECTION 1




SECTION 2




SECTION 3





SECTION 4




SECTION 3A
With Optional
Multi-Lock Handle




FIXED OVER CASEMENT OUTSWING (4-BAR HINGE)

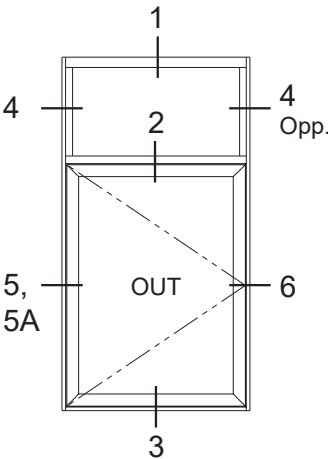


SECTION 1




SECTION 2




SECTION 3




SECTION 4




SECTION 4 Opp.




SECTION 5




SECTION 6








SECTION 5A
With Optional
Multi-Lock Handle




FIXED OVER CASEMENT OUTSWING (BUTT HINGE)

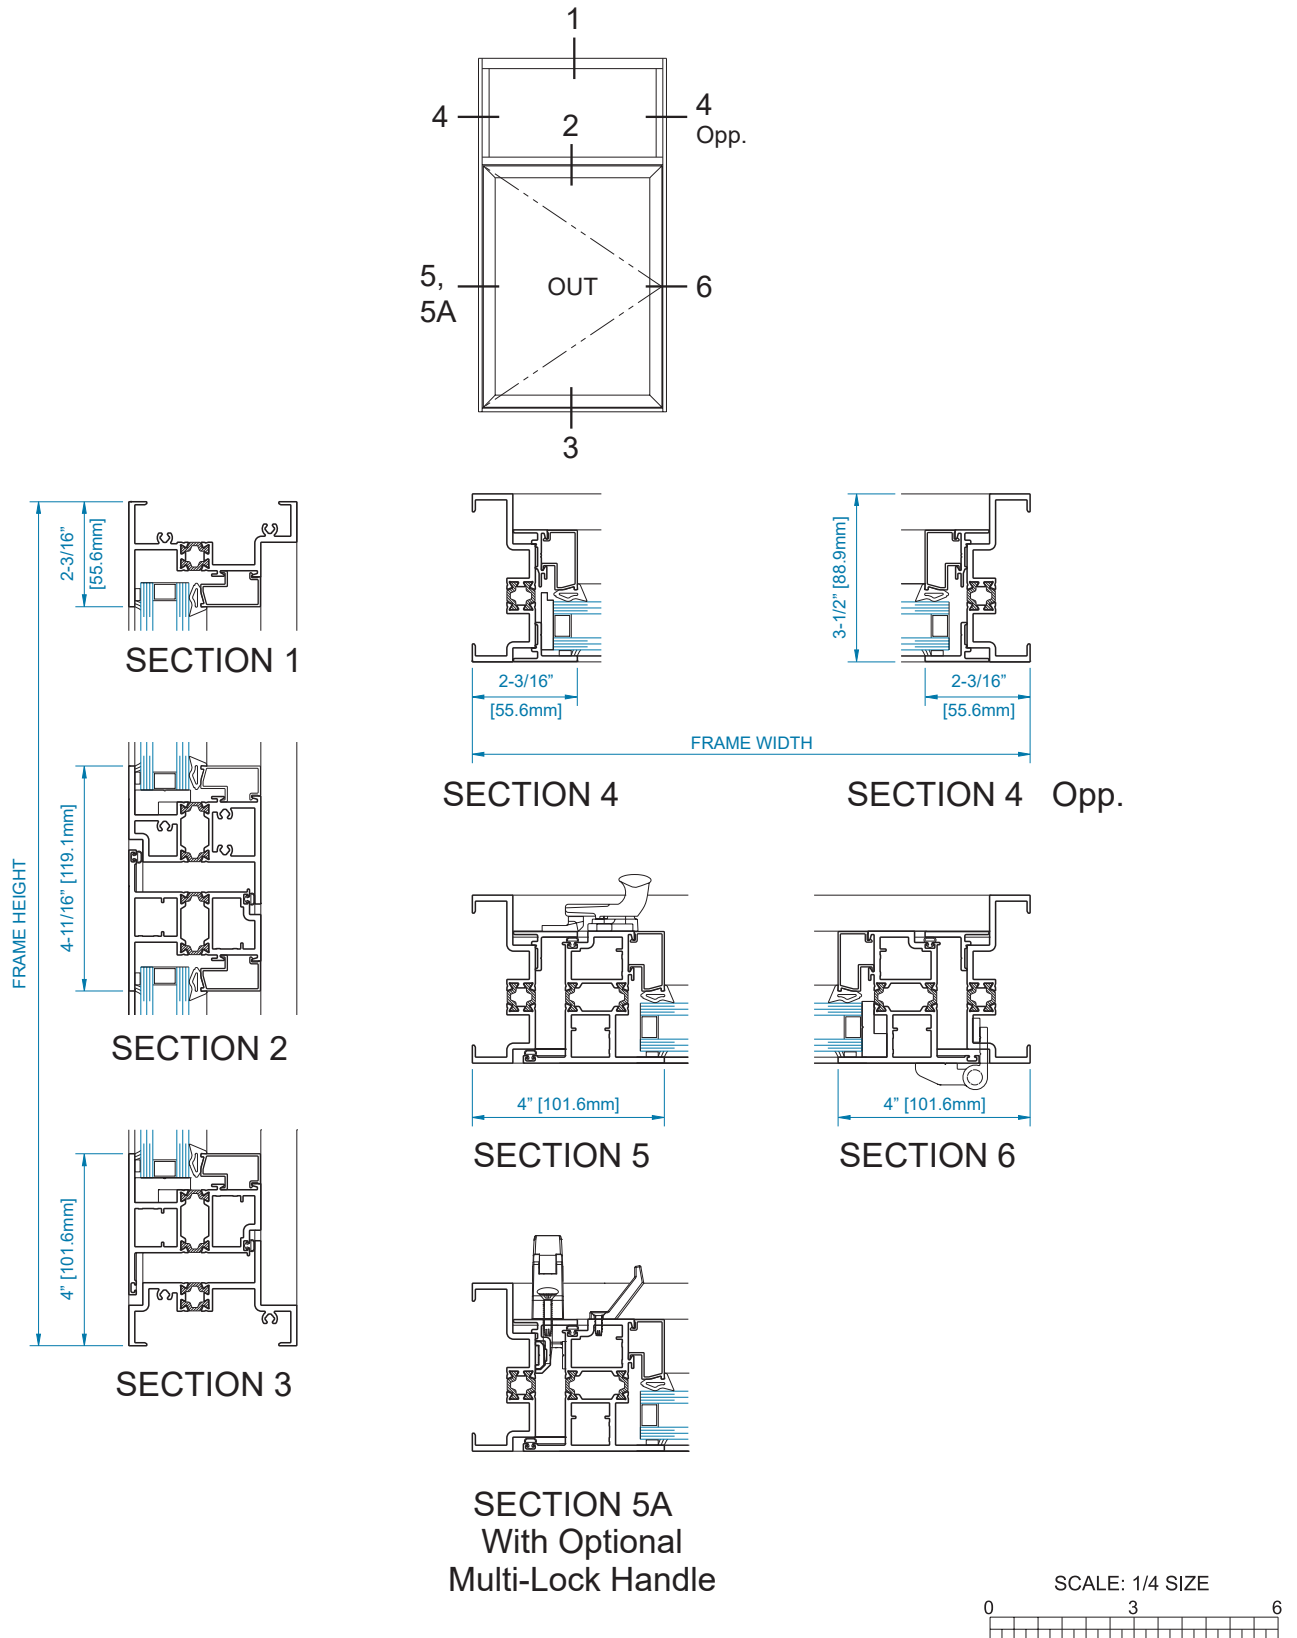


CASEMENT OUTSWING OVER FIXED (4-BAR HINGE)

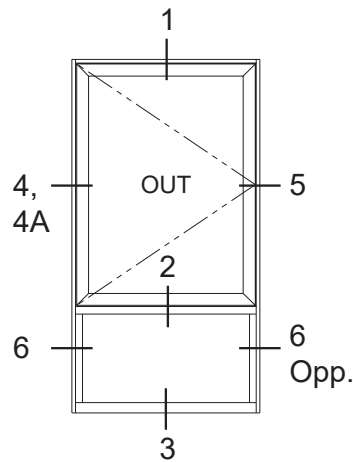


SECTION 4




SECTION 5




SECTION 6




SECTION 6 Opp.




SECTION 4A
With Optional
Multi-Lock Handle




CASEMENT OUTSWING OVER FIXED (BUTT HINGE)

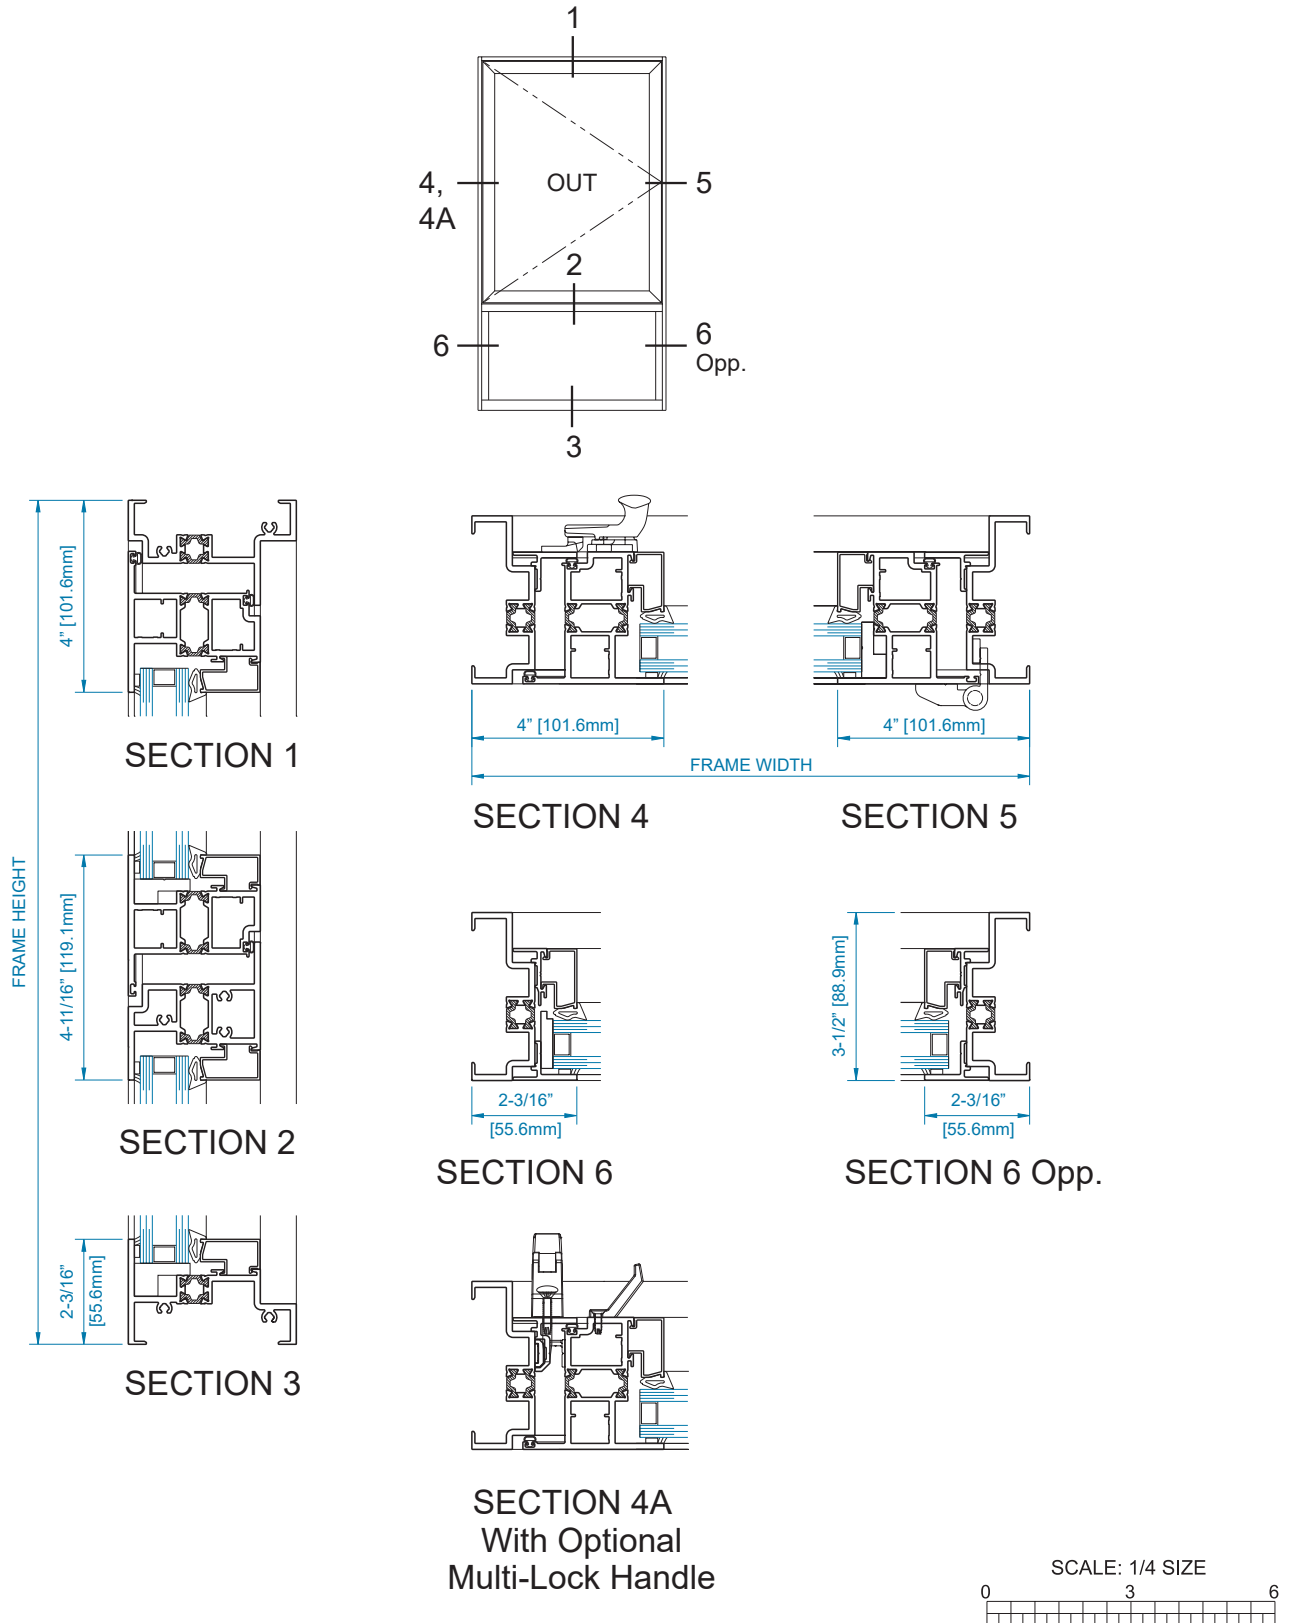






DOUBLE FIXED OVER CASEMENT OUTSWING (4-BAR HINGE)

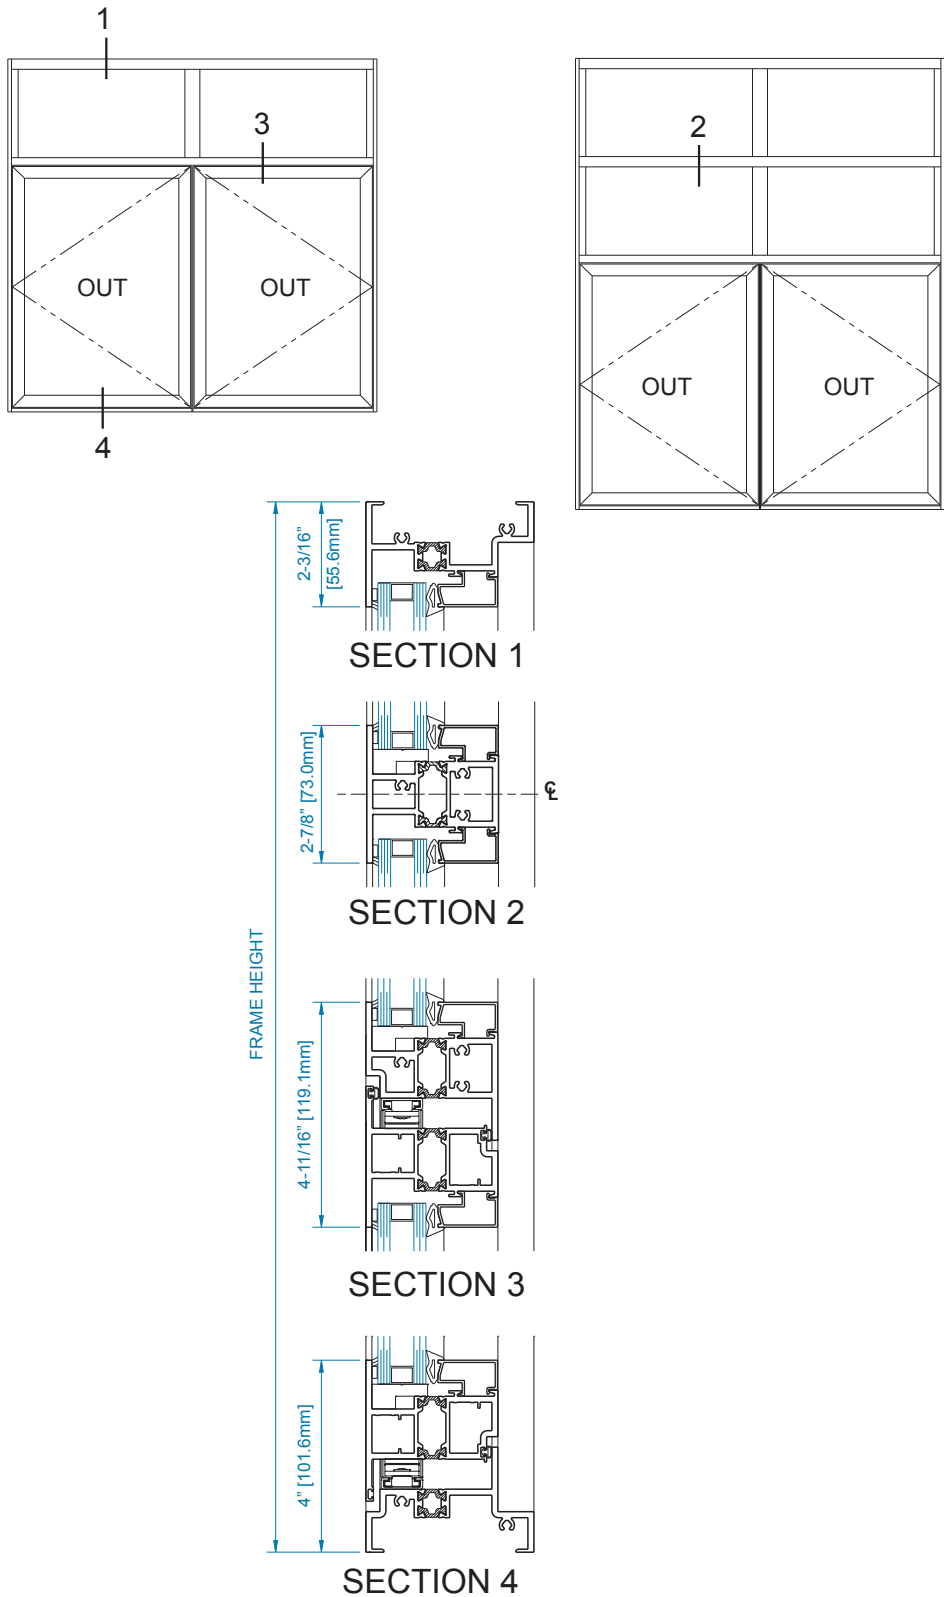



SCALE: 1/4 SIZE








DOUBLE FIXED OVER CASEMENT OUTSWING (4-BAR HINGE, CONT.)

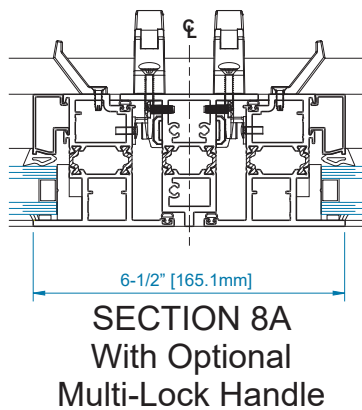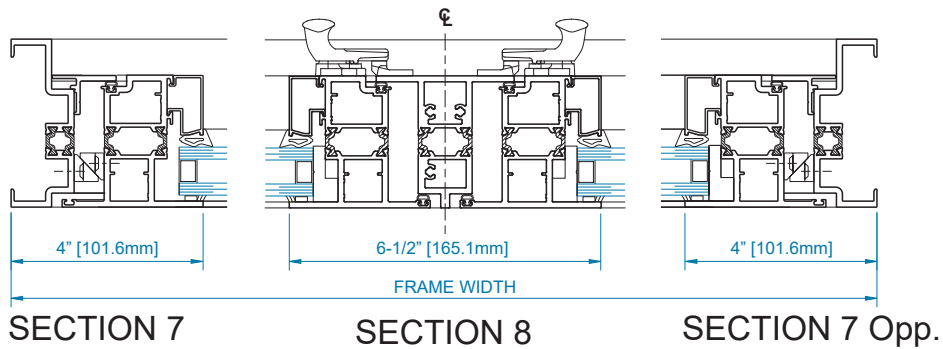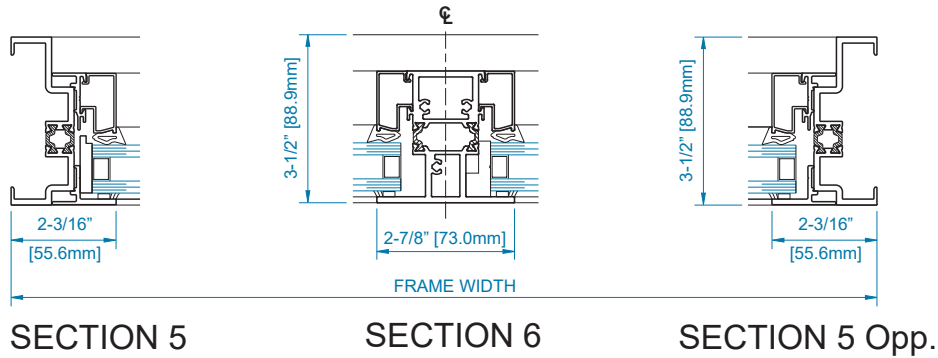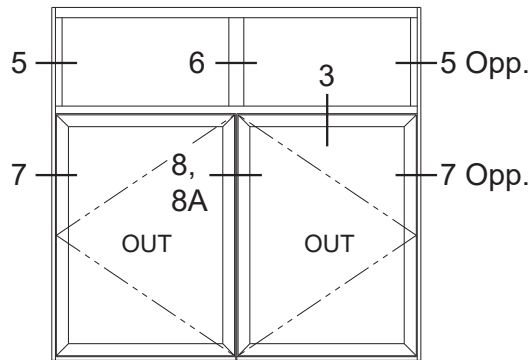



FIXED OVER CASEMENT OUTSWING MASTER FRAME (BUTT HINGE)

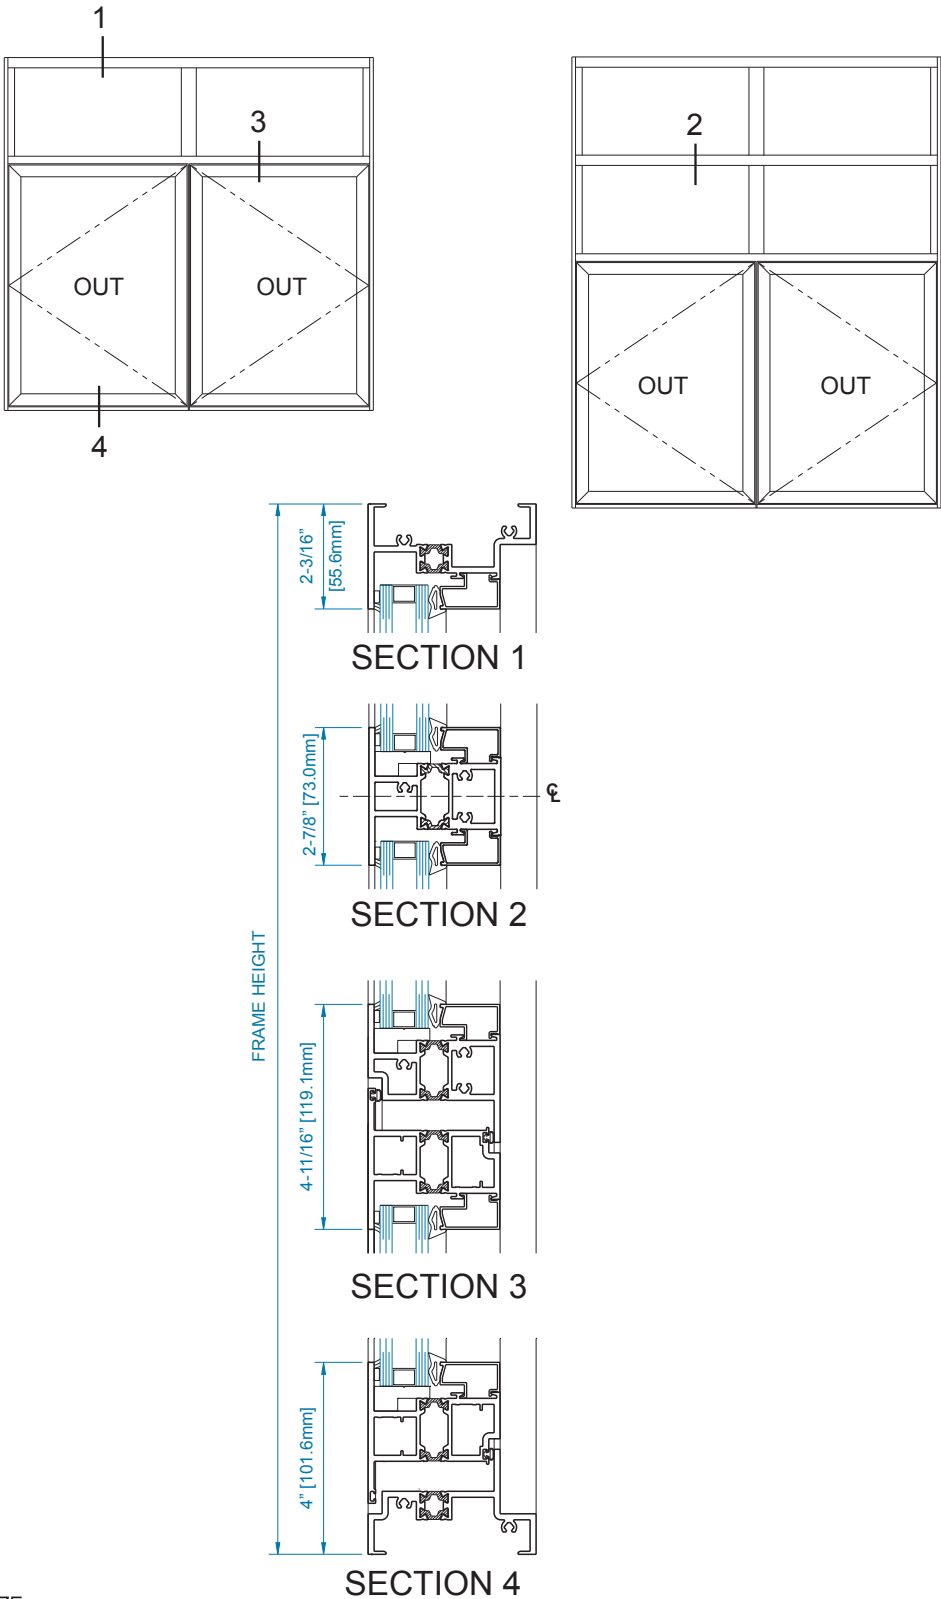


FIXED OVER CASEMENT OUTSWING MASTER FRAME (BUTT HINGE, CONT.)

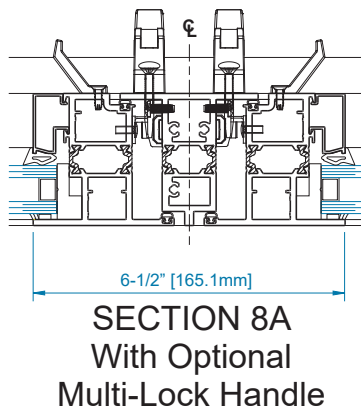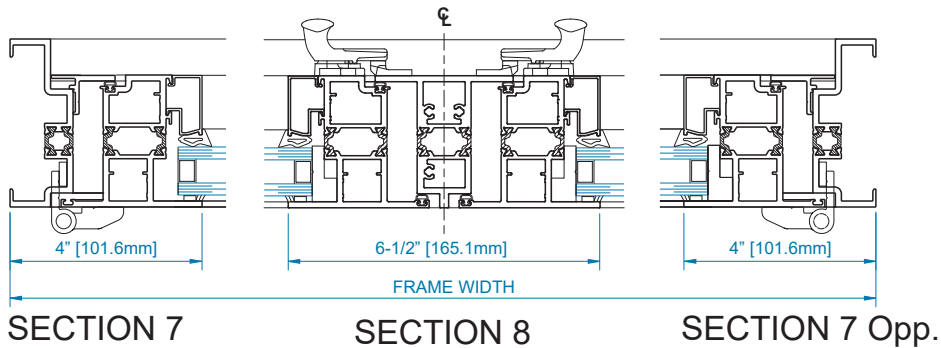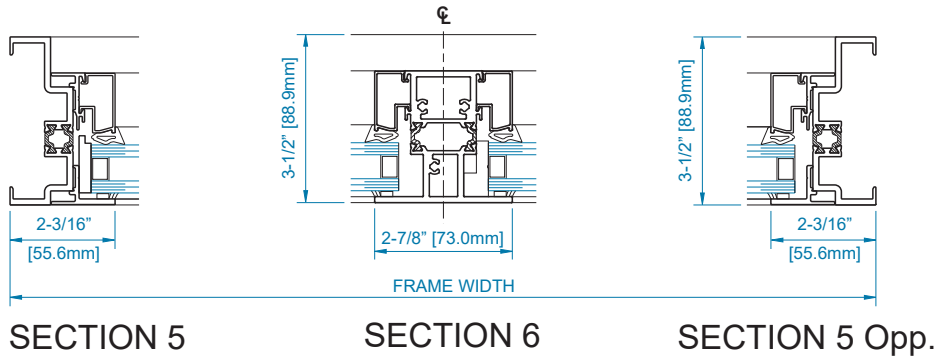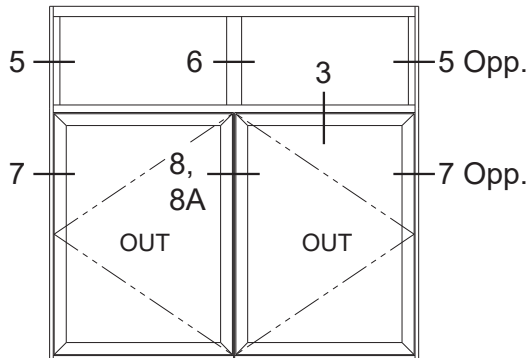


CASEMENT INSWING (BUTT HINGE)

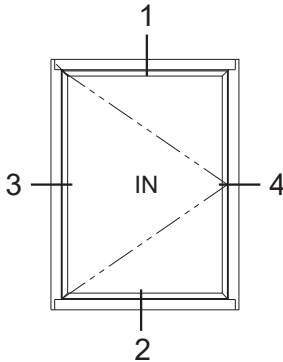


SECTION 1




SECTION 2



SECTION 3




SECTION 4




SECTION 3A
With Optional
Multi-Lock Handle


SCALE: 1/4 SIZE






FIXED OVER CASEMENT INSWING (BUTT HINGE)

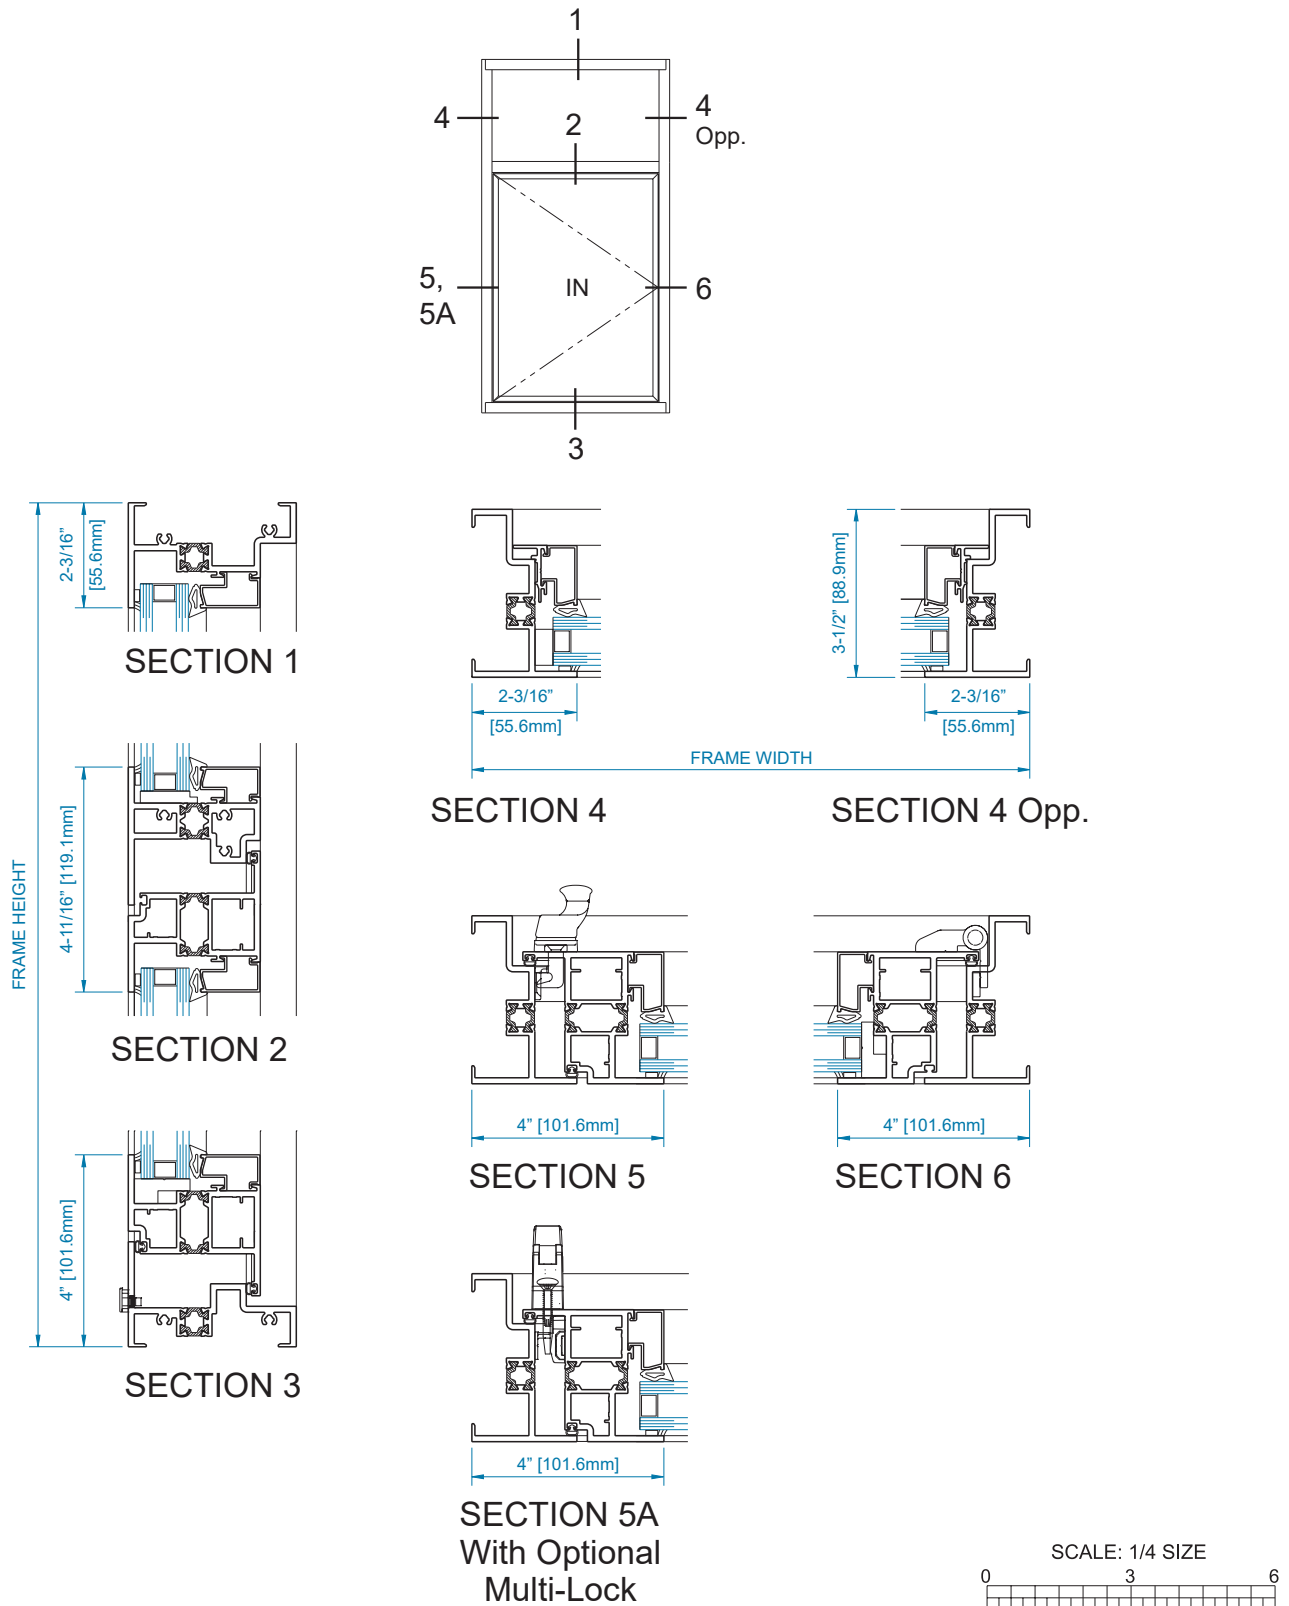


CASEMENT INSWING OVER FIXED (BUTT HINGE)

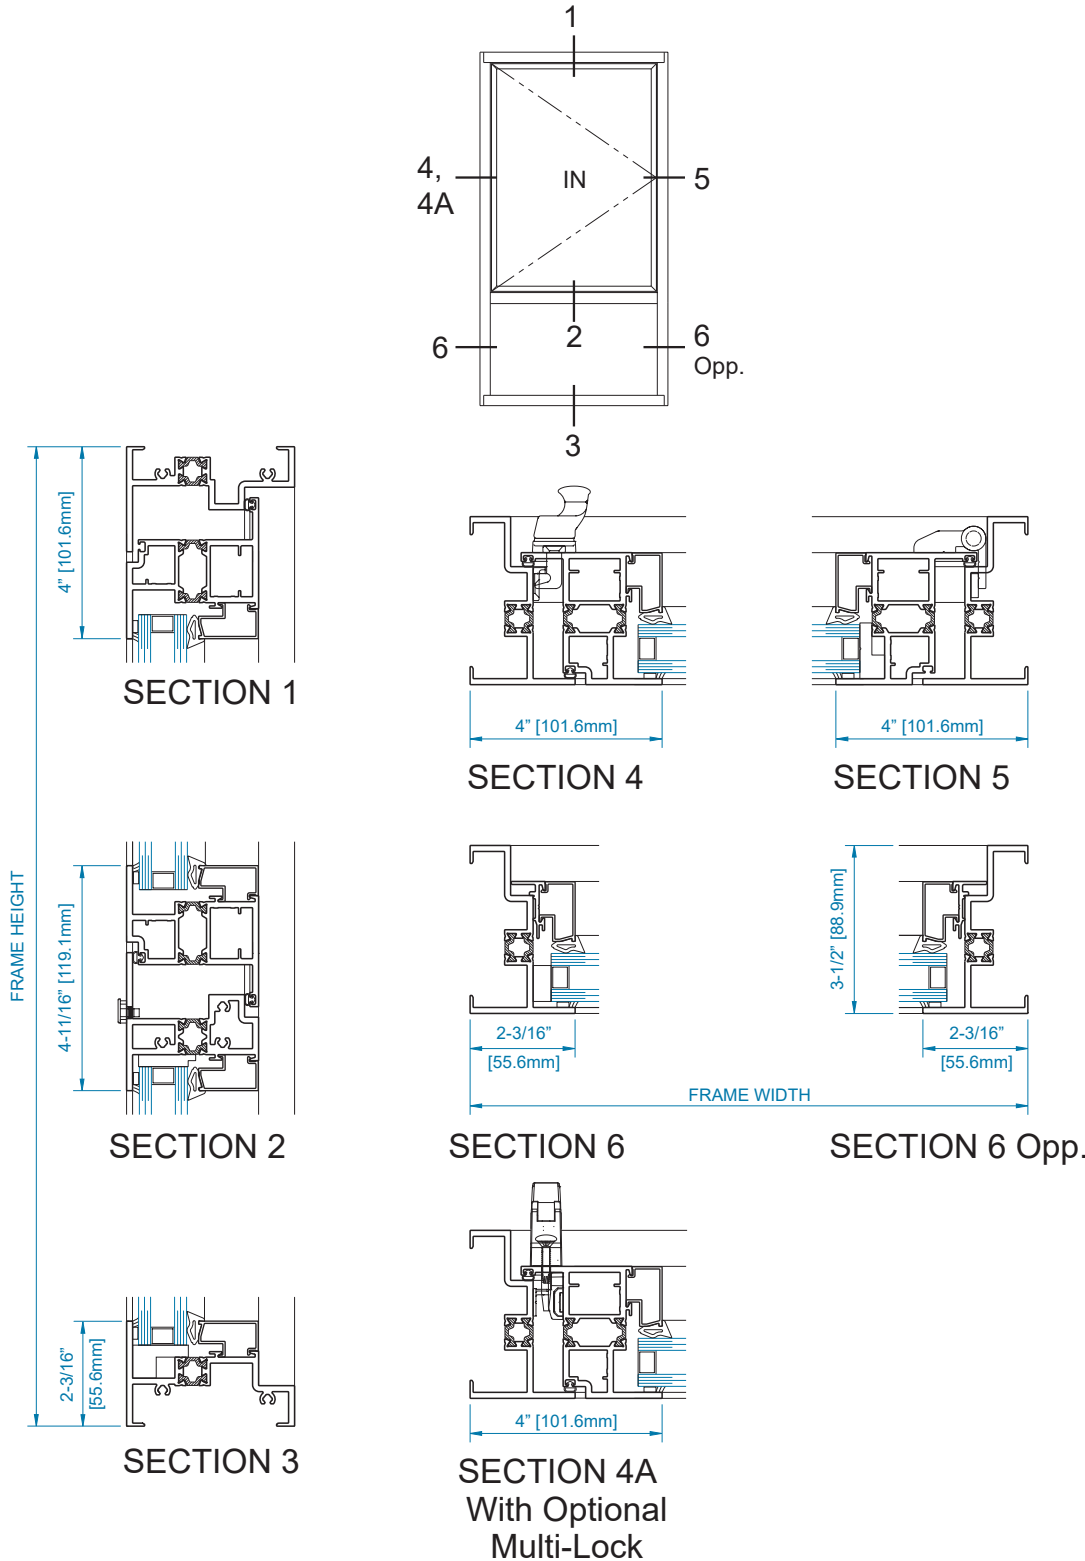




PROJECT OUT

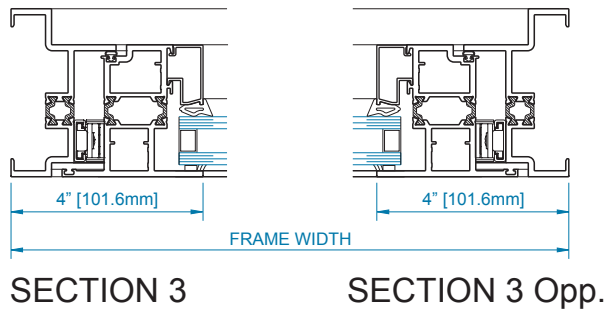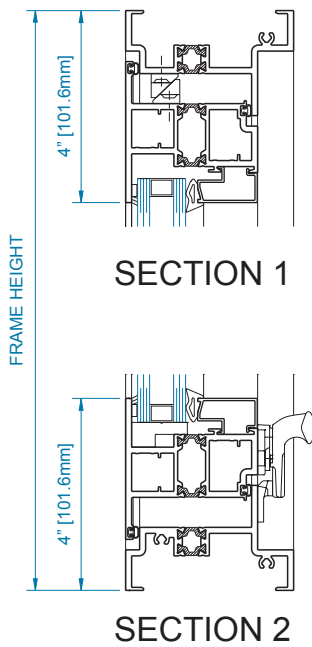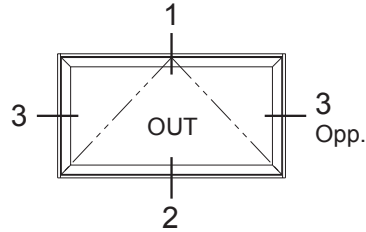


SCALE: 1/4 SIZE




FIXED OVER PROJECT OUT

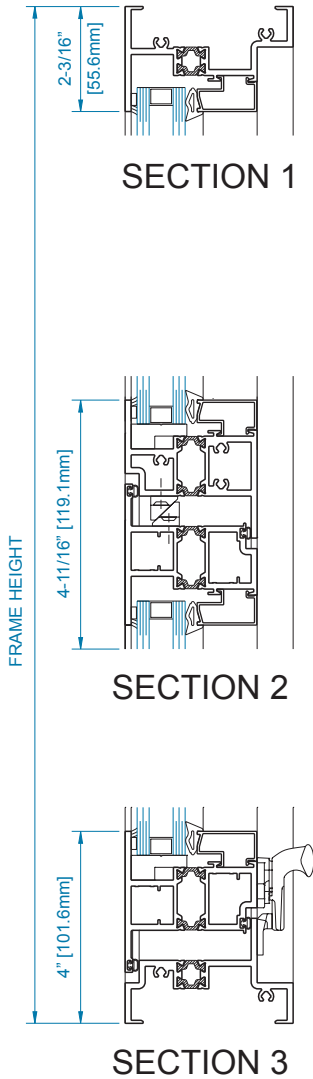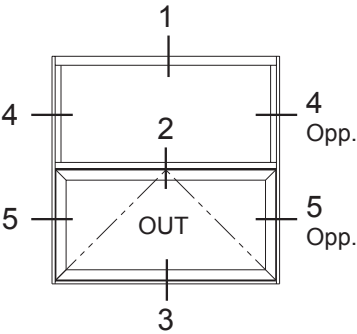


SECTION 4



SECTION 4 Opp.




SECTION 5








SECTION 5 Opp.


FRAME WIDTH




PROJECT OUT OVER PROJECT OUT

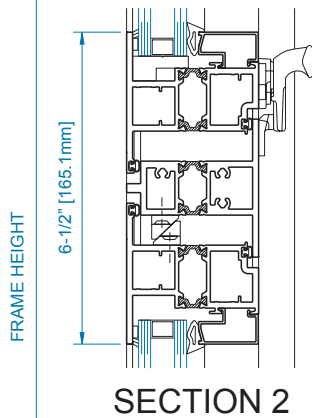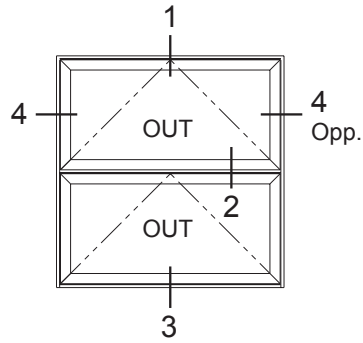



SECTION 4




SECTION 4 Opp.




PROJECT OUT OVER FIXED OVER PROJECT OUT

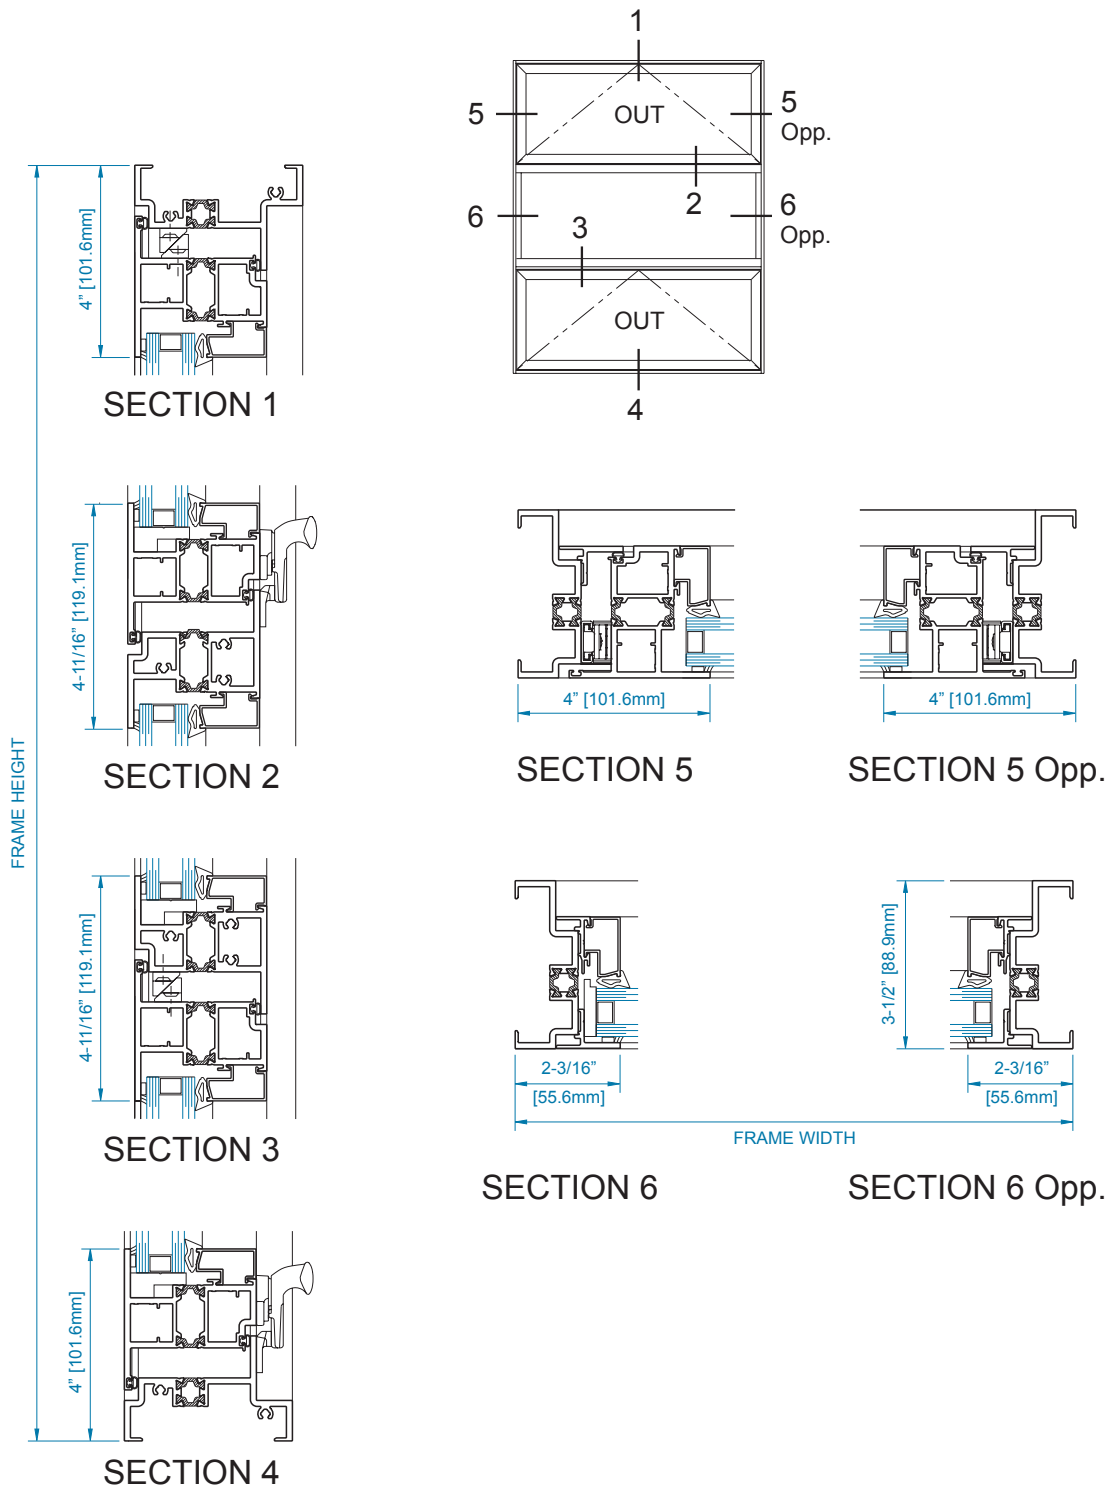



FIXED OVER PROJECT OUT OVER FIXED

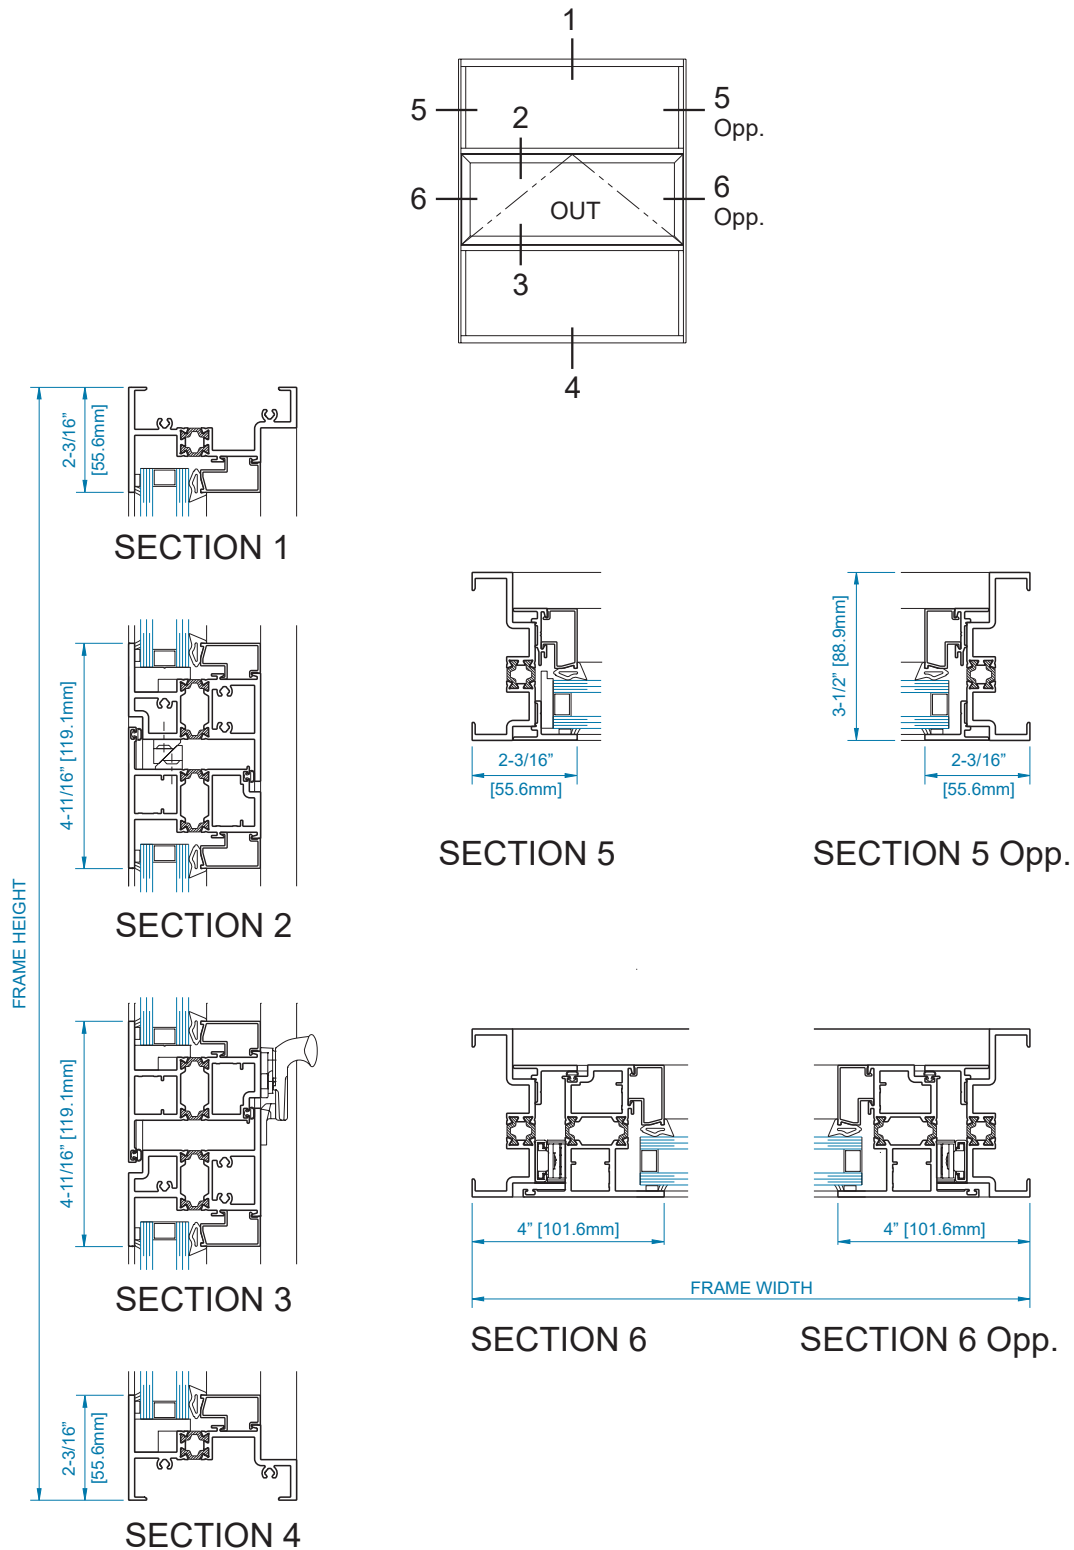




SCALE: 1/4 SIZE







FIXED OVER PROJECT OUT MASTER FRAME

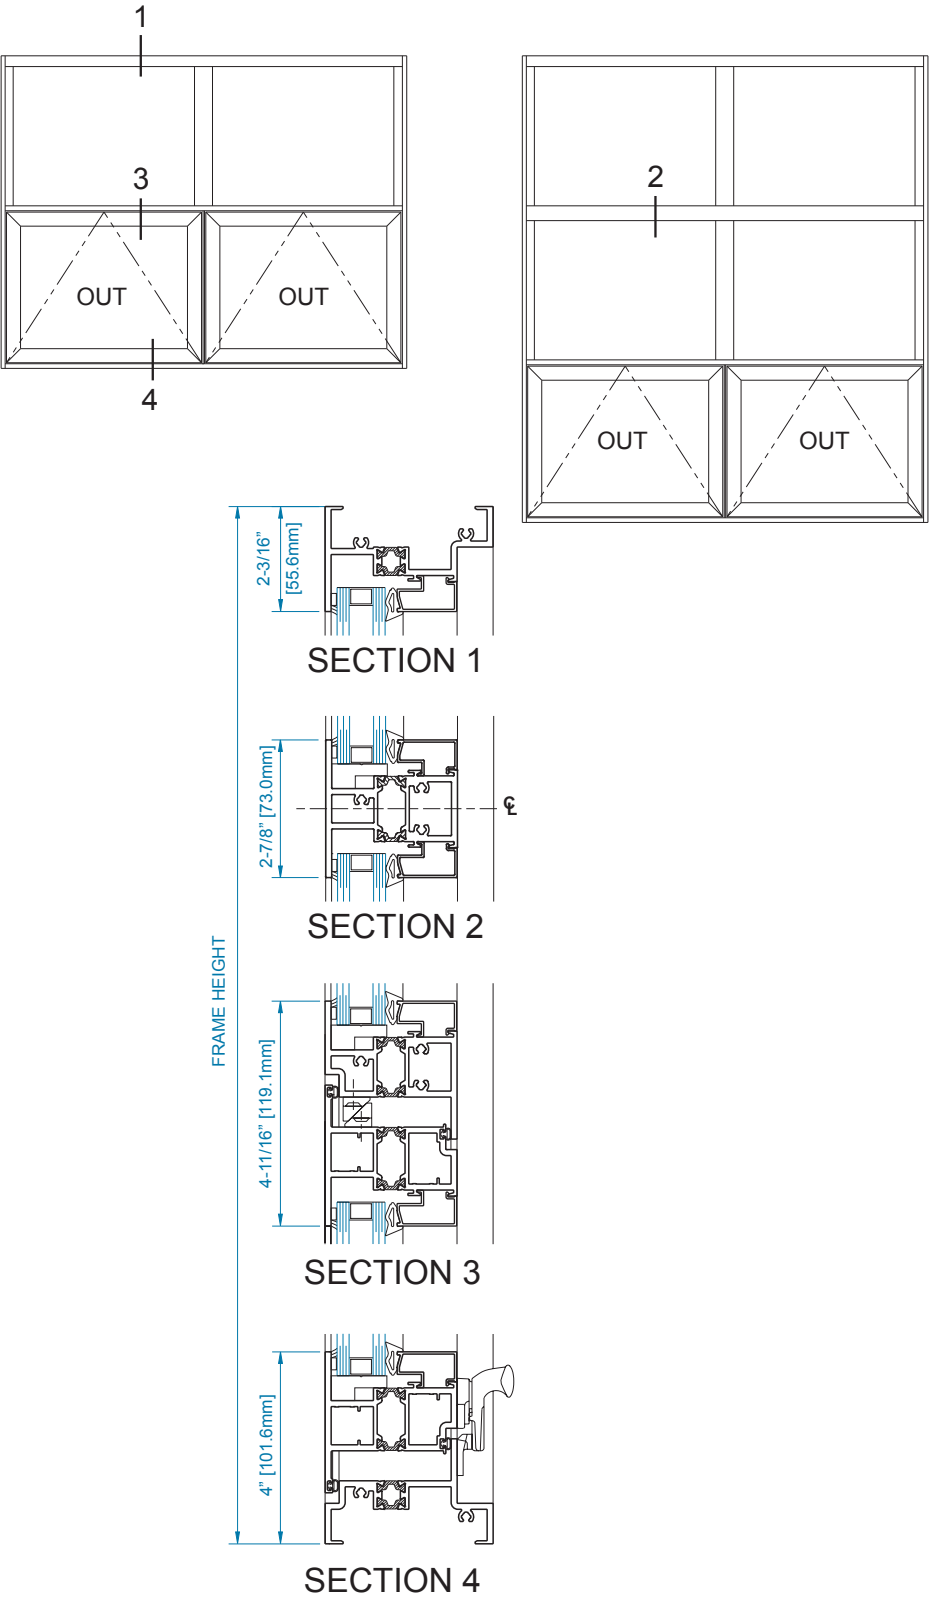

FIXED OVER PROJECT OUT MASTER FRAME (CONT.)

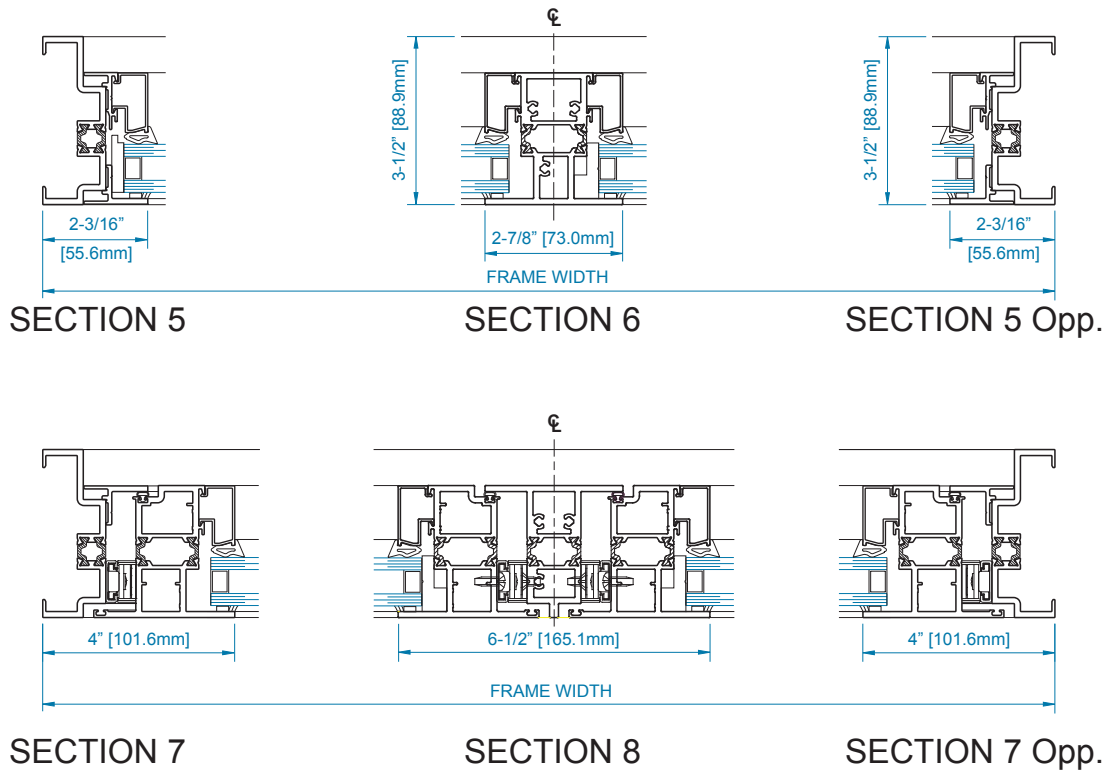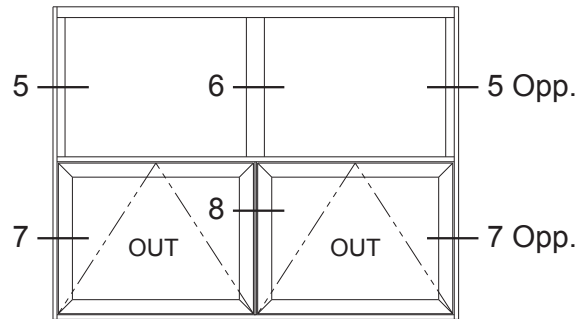


PROJECT IN

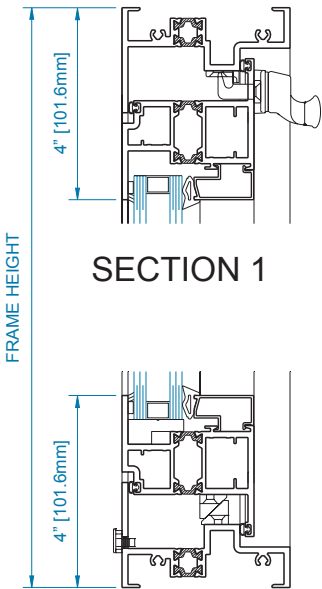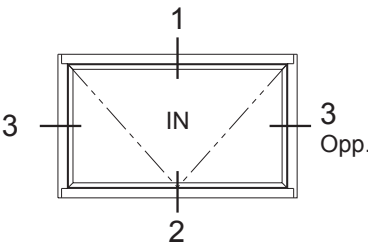


SECTION 2

SECTION 3


SECTION 3 Opp.





FIXED OVER PROJECT IN

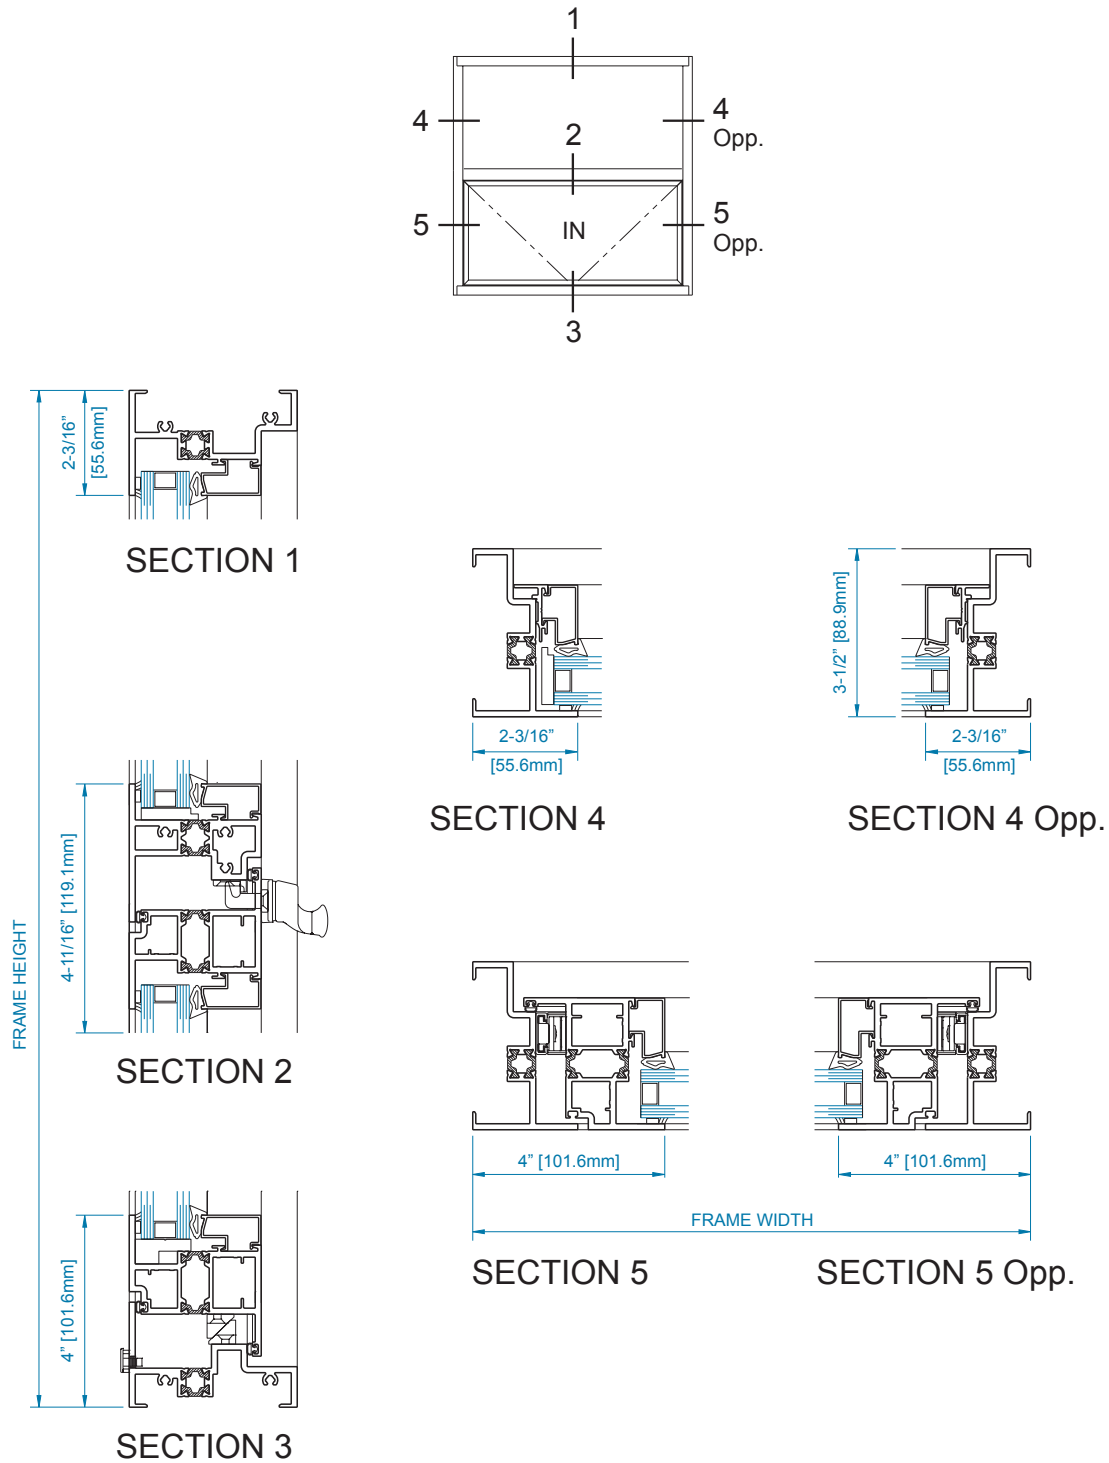


SCALE: 1/4 SIZE




PROJECT IN OVER PROJECT IN

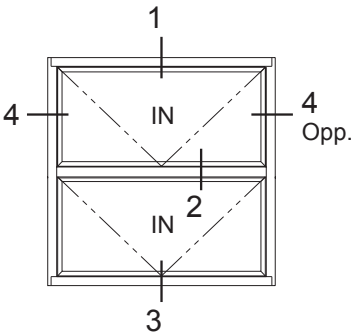


SECTION 1

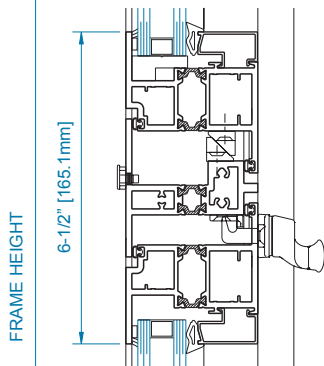


SECTION 2



SECTION 3




SECTION 4




SECTION 4 Opp.



SCALE: 1/4 SIZE





PROJECT IN OVER PROJECT IN

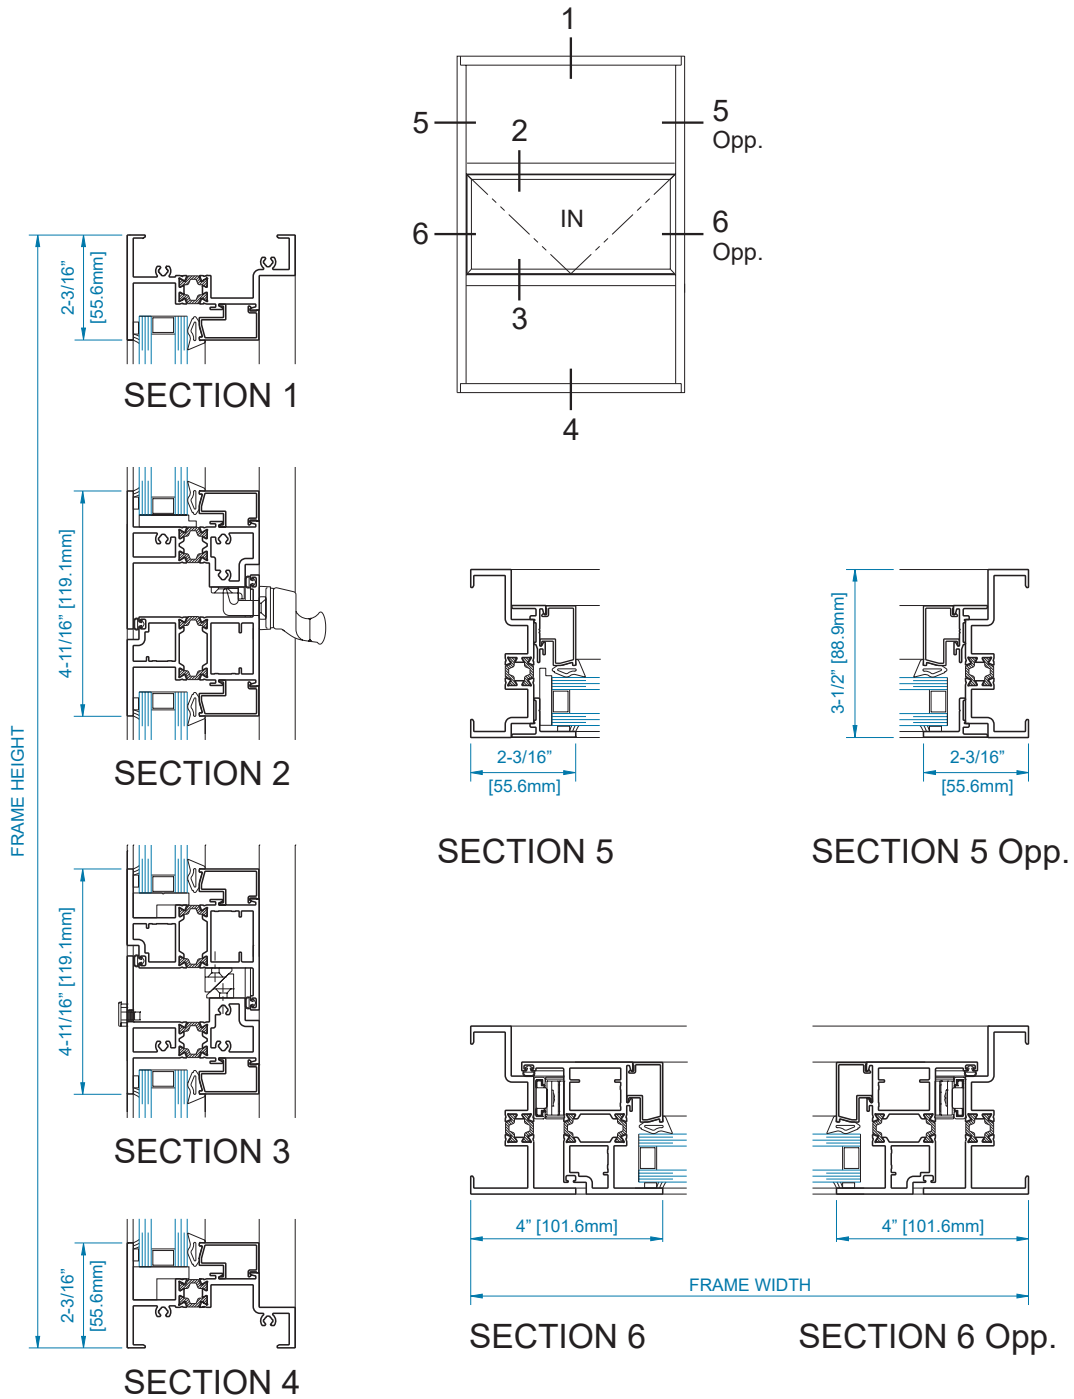


PROJECT IN OVER FIXED OVER PROJECT IN

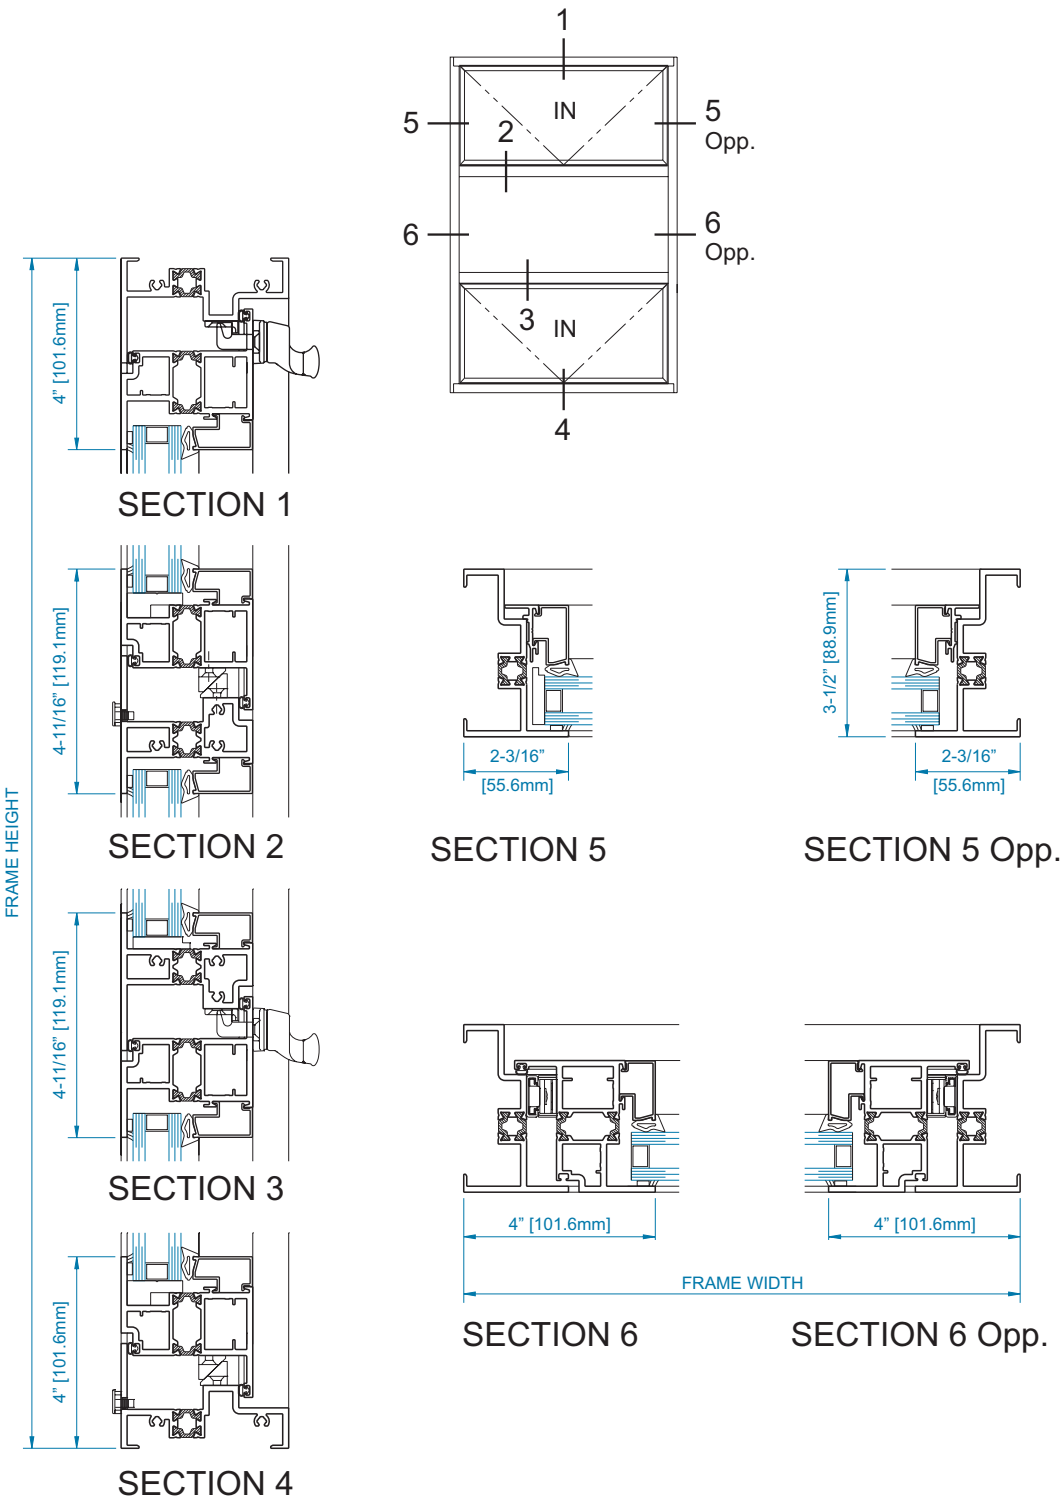


**DUAL GLAZING
With Optional 1" Blind**

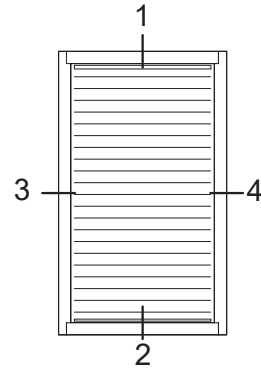


SECTION 1




SECTION 3





SECTION 4




SECTION 2




TRIPLE GLAZING
With Optional 5/8" Blind

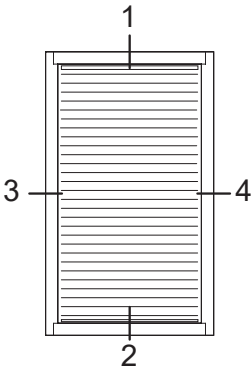


SECTION 1



SECTION 3




SECTION 4




SECTION 2


SCALE: 1/4 SIZE



**MUNTIN GLAZING OPTIONS
SINGLE GLAZING**


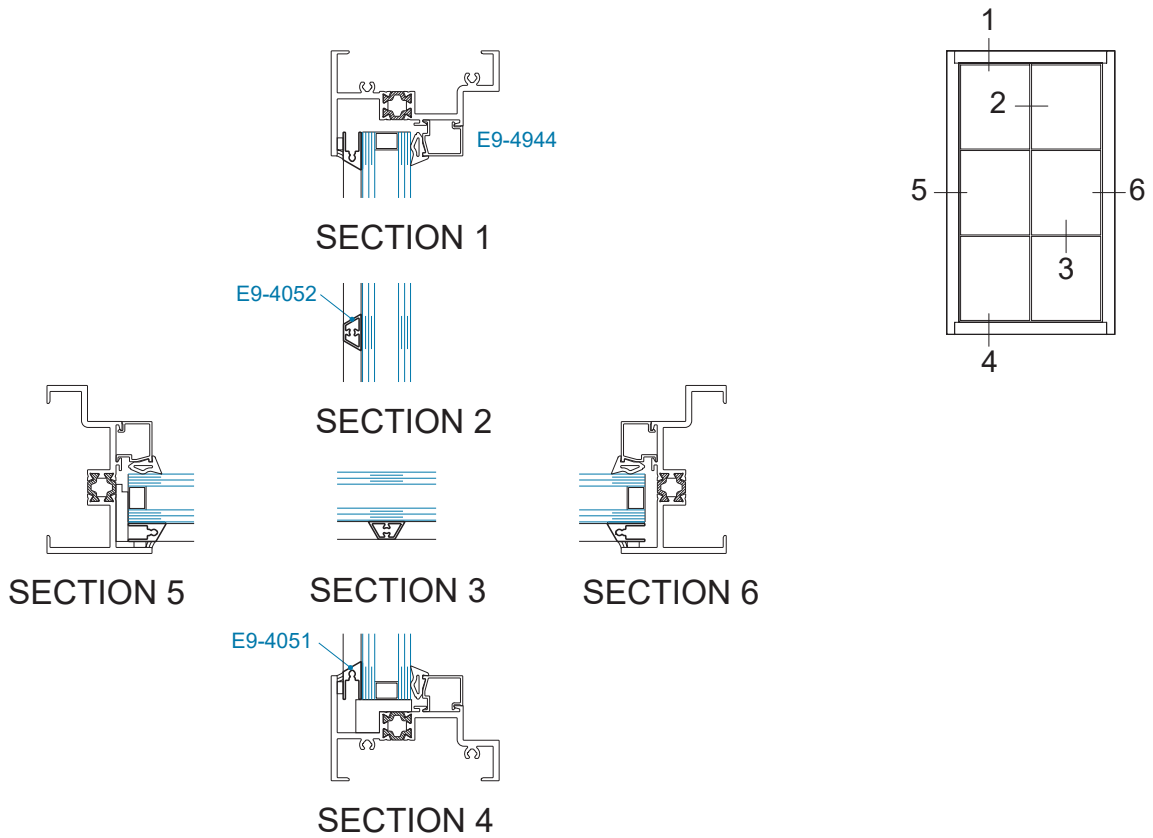


TRIPLE GLAZING

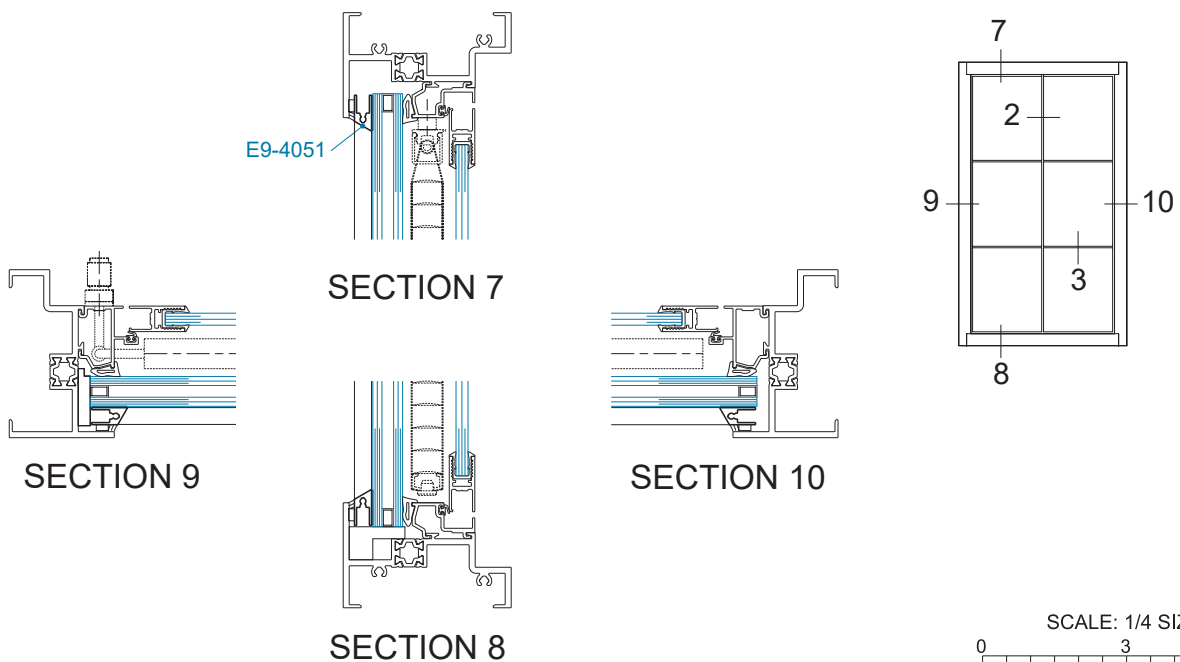


SCALE: 1/4 SIZE
0 3 6


EXPANSION MULLIONS
(Recommended for use with receptor systems)

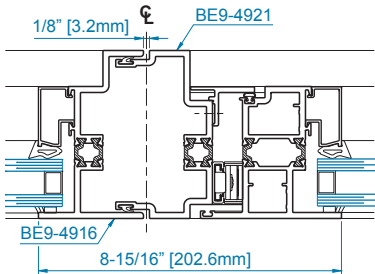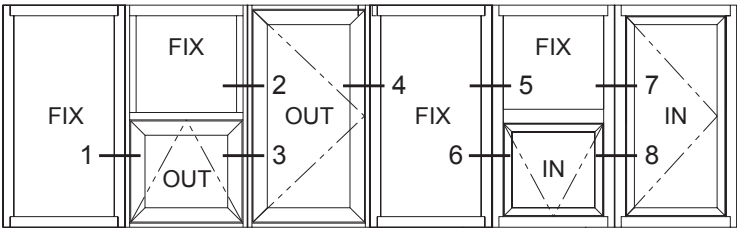


SECTION 1

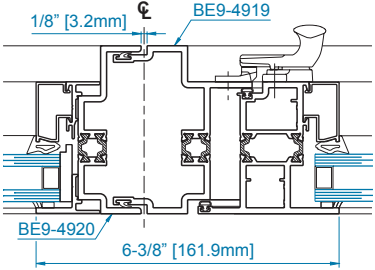


SECTION 2

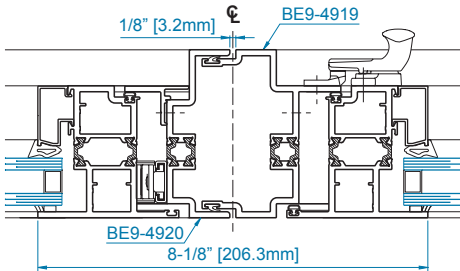


SECTION 3

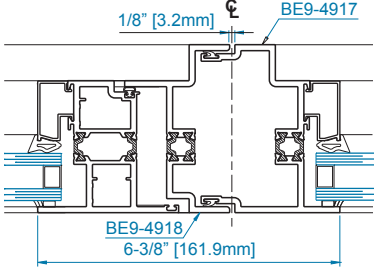


SECTION 4




SECTION 5

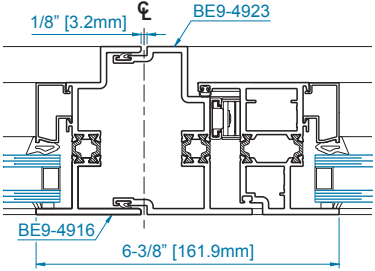


SECTION 6

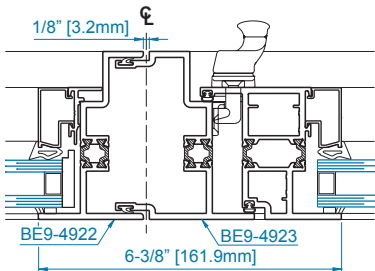



SECTION 7

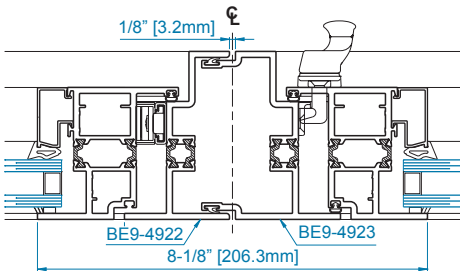


SECTION 8




HEAVY DUTY EXPANSION MULLION
(Recommended for use with receptor systems)

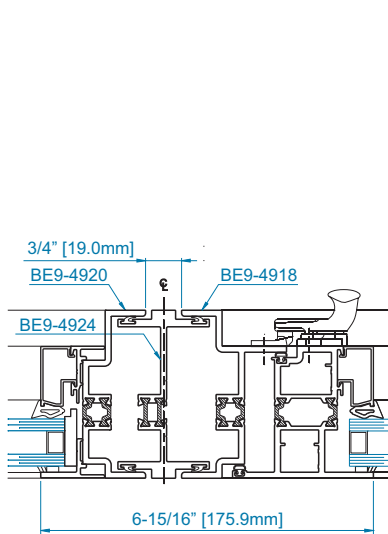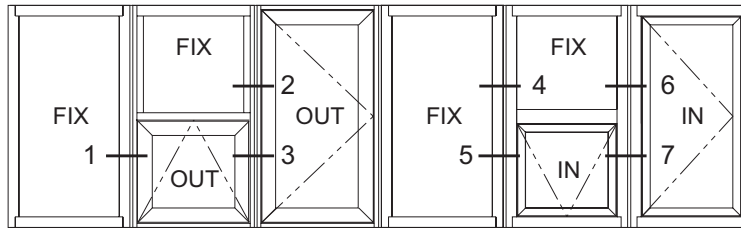


SECTION 2

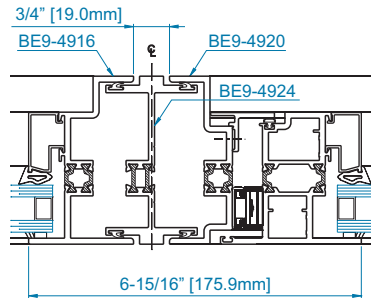


SECTION 2

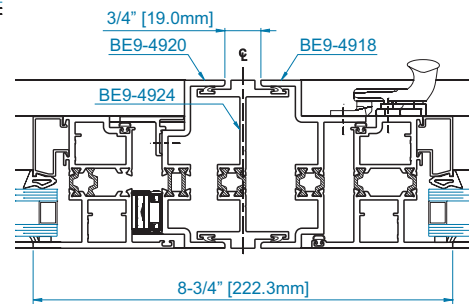


SECTION 3




SECTION 4

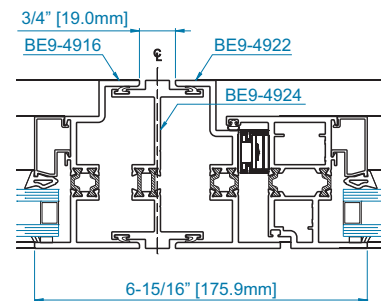

SECTION 5

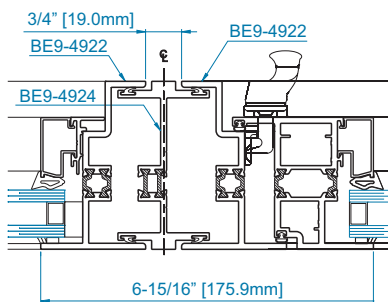


SECTION 6










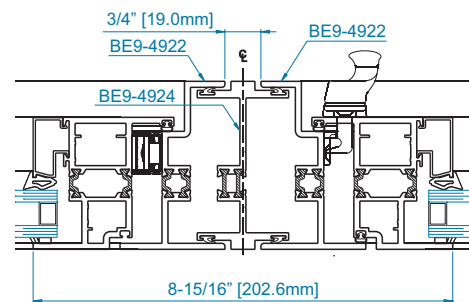


SECTION 7

SCALE: 1/4 SIZE





STACKING MULLION
(Not recommended for use with receptor systems)

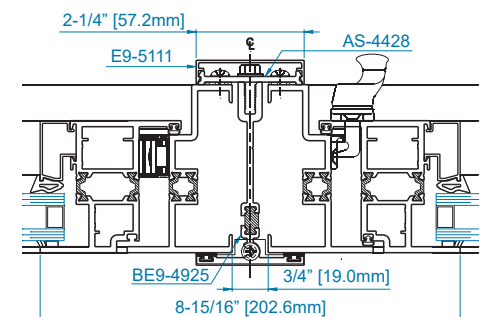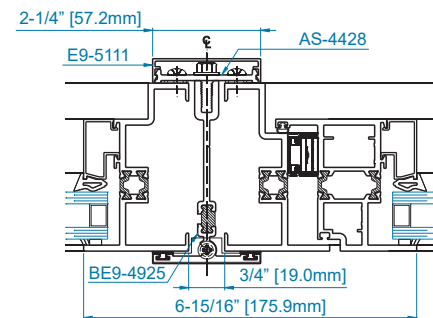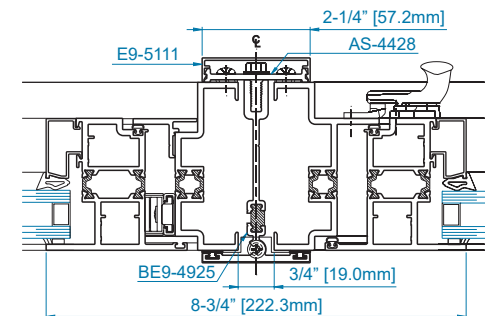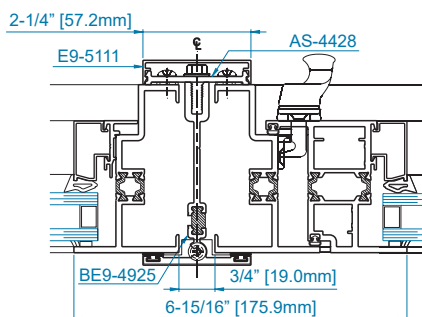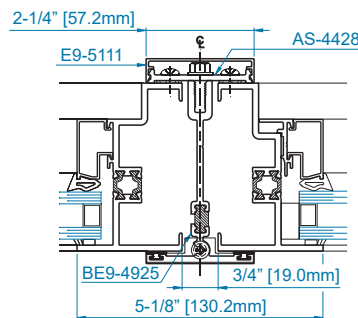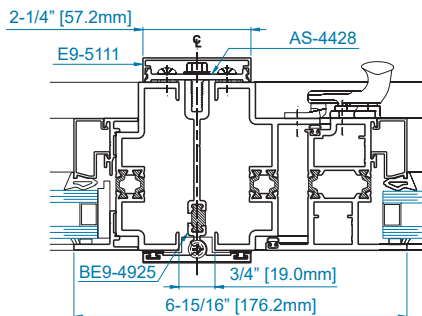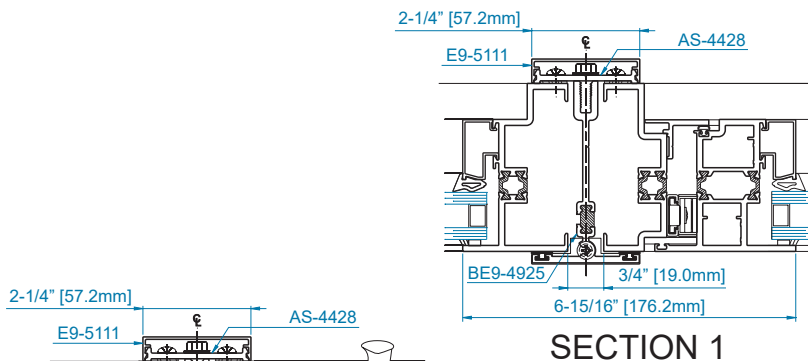
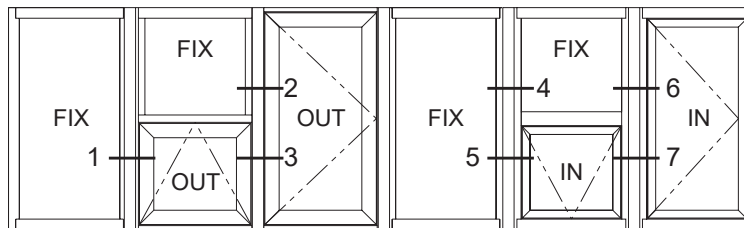


These charts are intended for preliminary application. For detailed analysis, contact YKK AP Engineering at 1-800-955-9551.



EXPANSION MULLION
(Recommended for use with receptor systems)

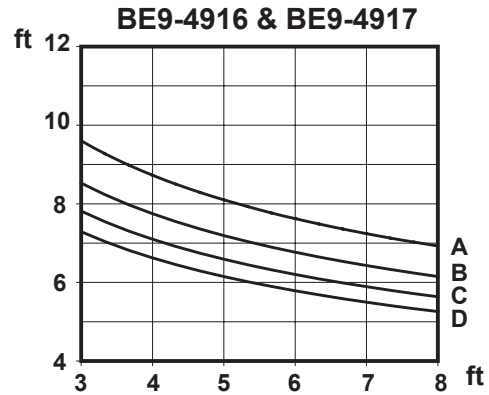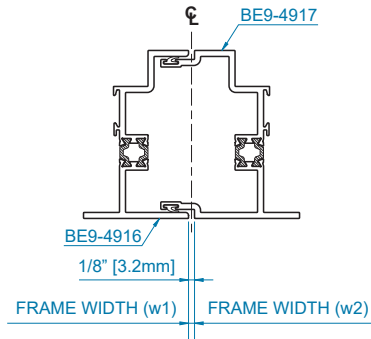

HEAVY DUTY EXPANSION MULLION
(Recommended for use with receptor systems)

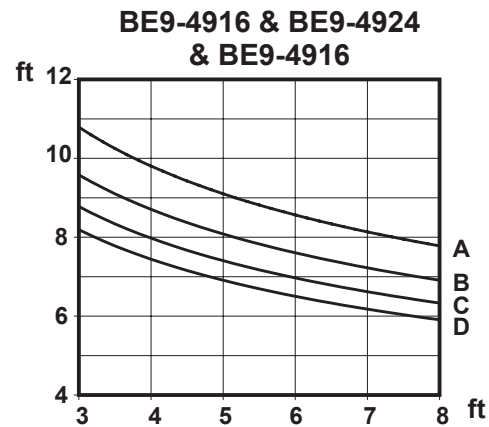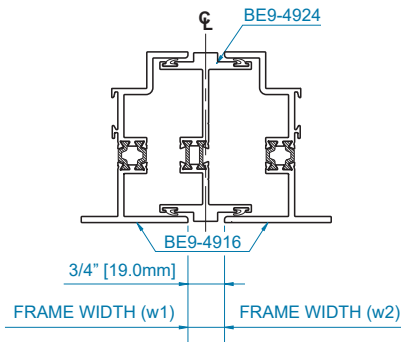


STACKING MULLION

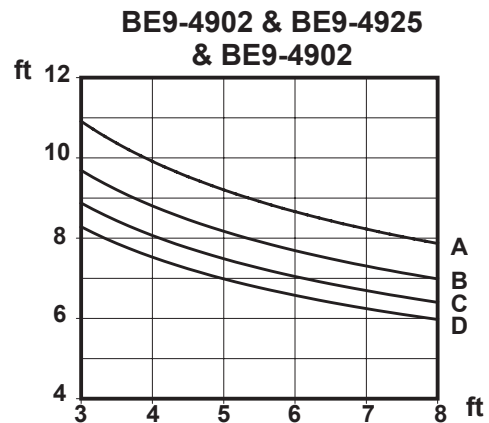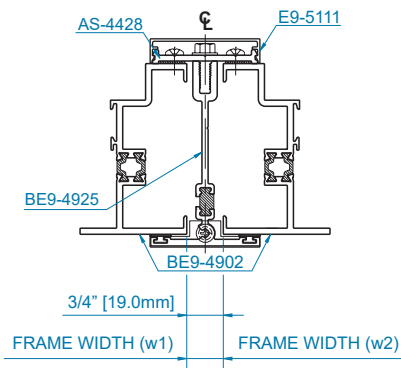

DEFLECTION CRITERIA: L/175


A=35 PSF (1676 Pa) C=65 PSF (3112 Pa)
B=50 PSF (2394 Pa) D=80 PSF (3830 Pa)

These charts are intended for preliminary application. For detailed analysis, contact YKK AP Engineering at 1-800-955-9551.

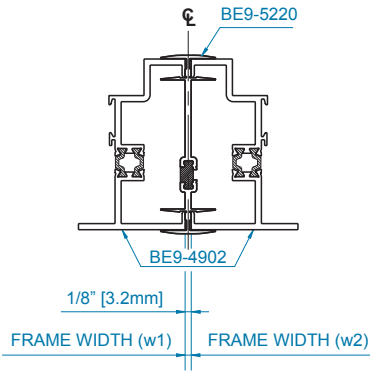

STACKING MULLION


BE9-5220 & BE9-4902

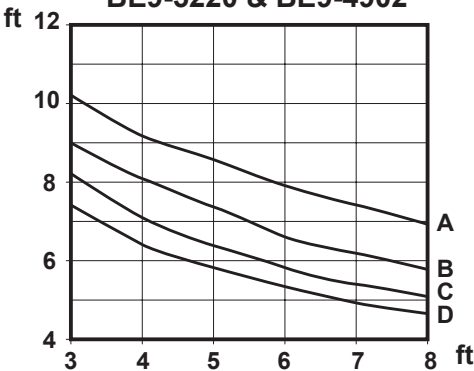


A=35 PSF (1676 Pa) C=65 PSF (3112 Pa)
B=50 PSF (2394 Pa) D=80 PSF (3830 Pa)

WIND LOAD AND DEAD LOAD


WIND LOAD

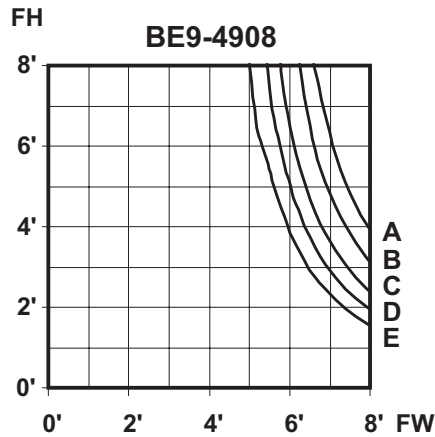



A=35 PSF (1676 Pa)
B=50 PSF (2394 Pa)
C=65 PSF (3112 Pa)
D=80 PSF (3830 Pa)
E=80 PSF (4788 Pa)



DEAD LOAD
(Based on 1" I.G. [1/4"-1/4"])

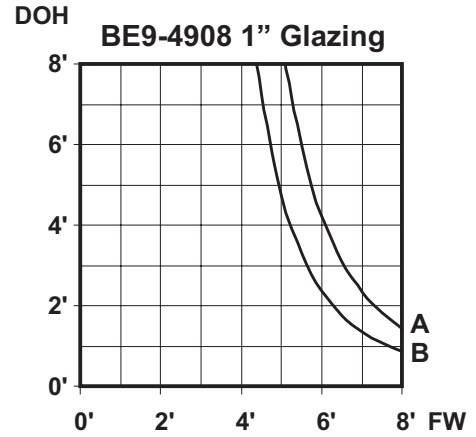


A=Setting Block at 1/8 Point Locations
B=Setting Block at 1/4 Point Locations

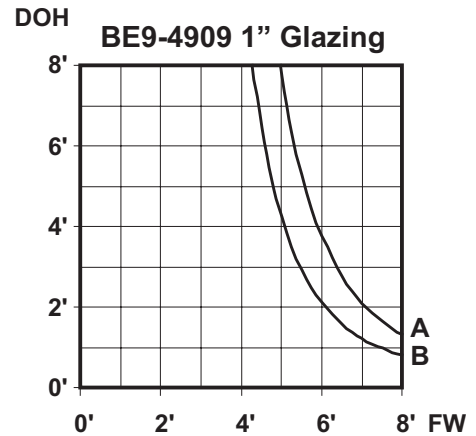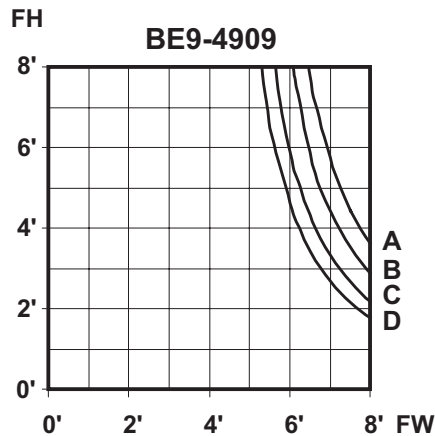


WIND LOAD AND DEAD LOAD


WIND LOAD

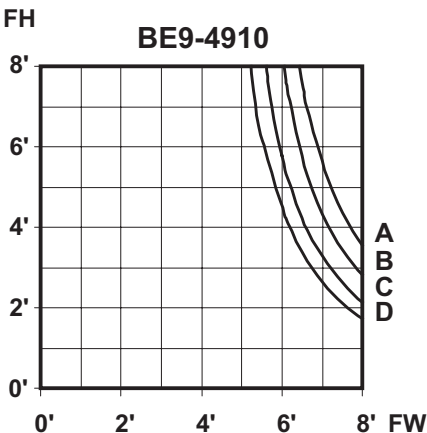

A=35 PSF (1676 Pa)
B=50 PSF (2394 Pa)
C=65 PSF (3112 Pa)
D=80 PSF (3830 Pa)




DEAD LOAD
(Based on 1" I.G. [1/4"-1/4"])

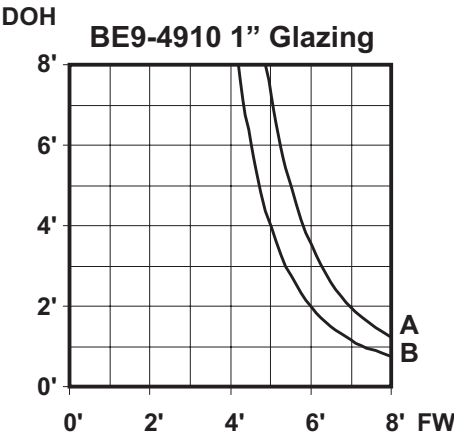


A=Setting Block at 1/8 Point Locations
B=Setting Block at 1/4 Point Locations

RECEPTOR SYSTEM

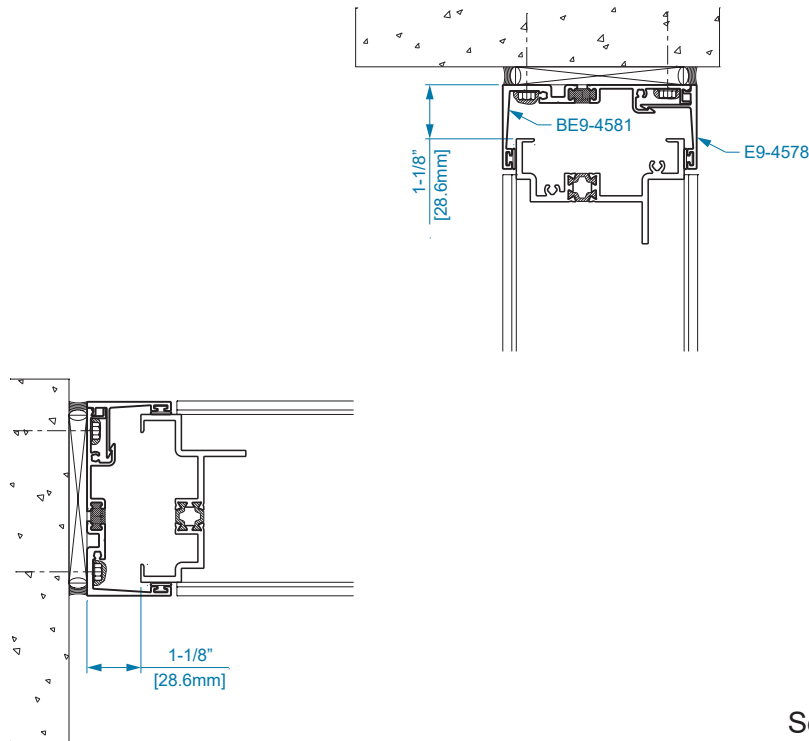


See page 42 for sill options.


ADDITIONAL ANCHORING

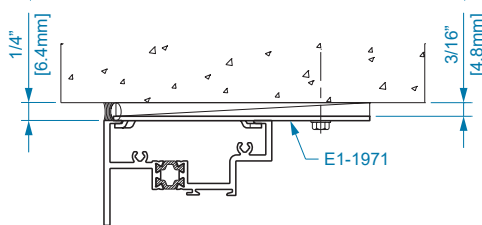


Twist Anchor

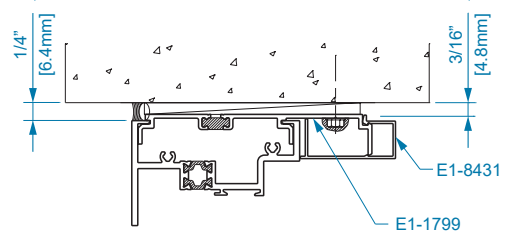

Strap Anchor

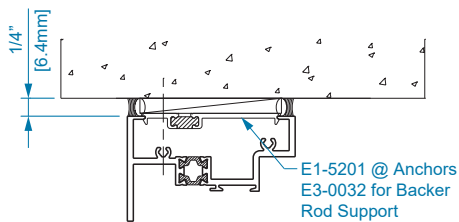


Direct Anchor with Flat Filler


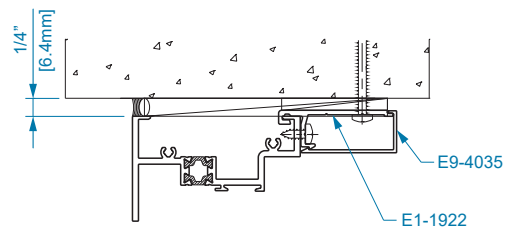


Anchor Clip

EXTERIOR SILL FLASHING DETAILS

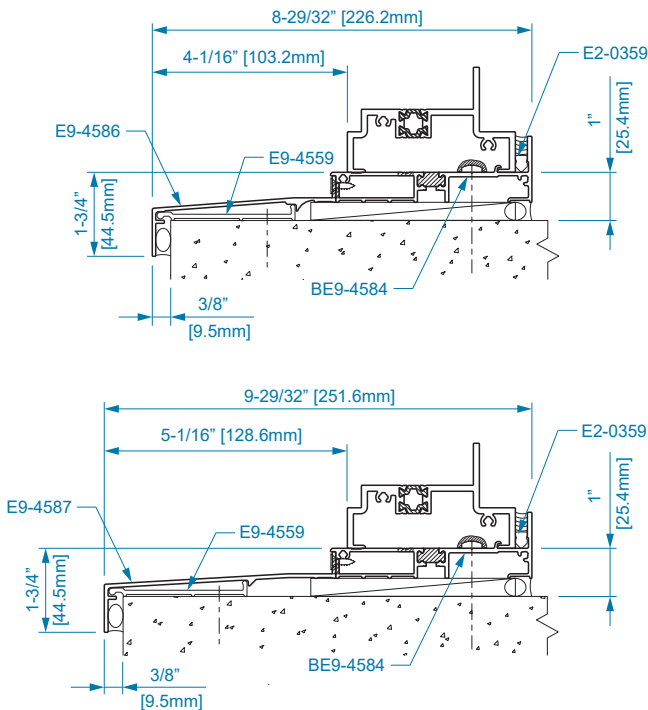


EXTERIOR SILL TRIM DETAILS

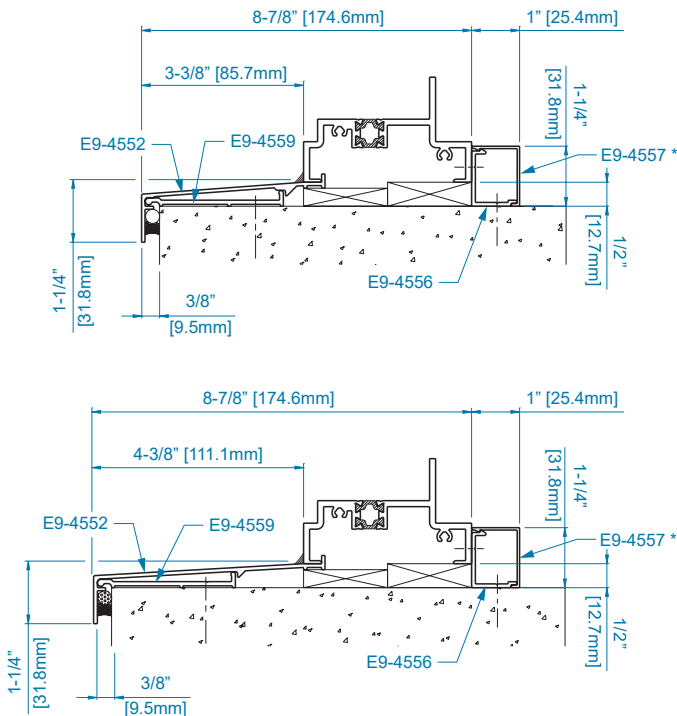


NOTE: Consult YKK AP engineering for conditions other than those listed above.

PANNING AND BOX TRIM DETAILS

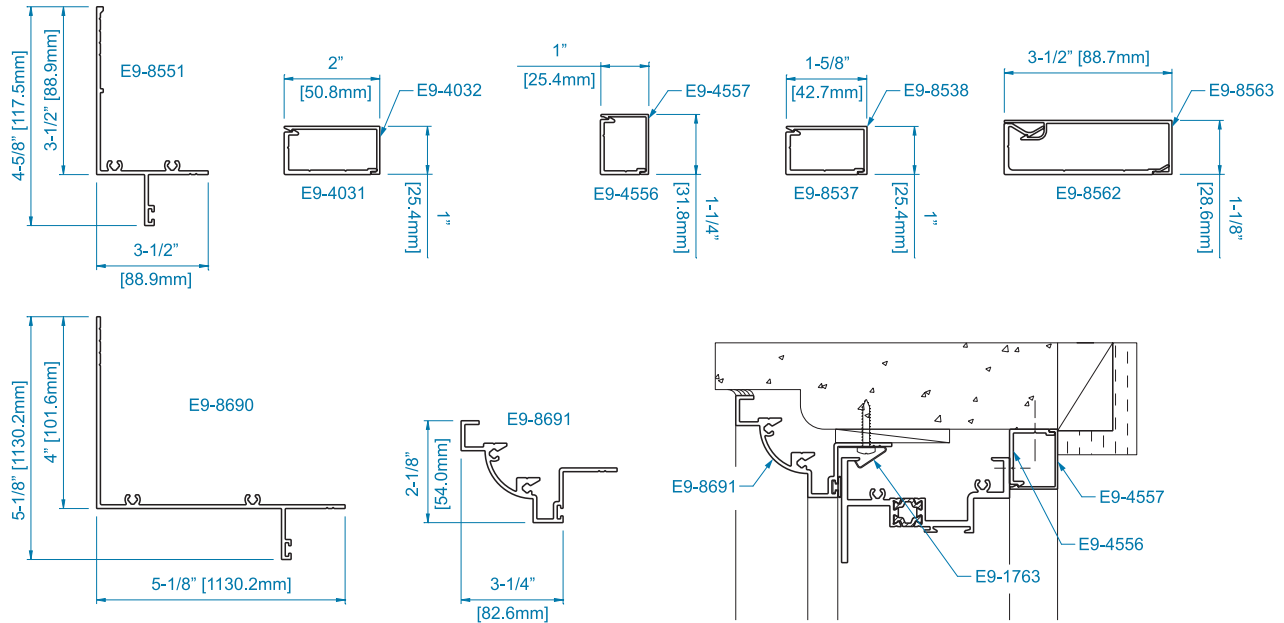


APPLIED MUNTINS AND STOOL TRIM DETAILS

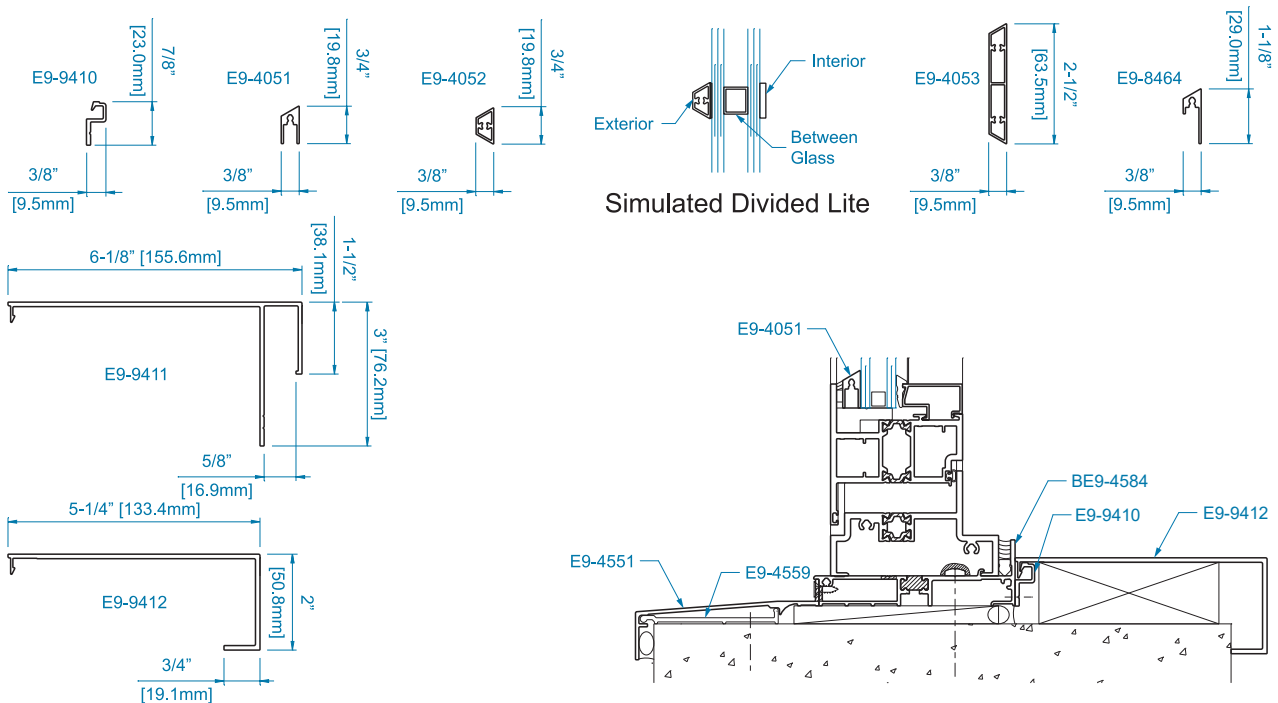



NOTE: Shown above are a small sampling of shapes available. Please consult YKK AP engineering for further information, or job specific requirements.

SCALE: 1/4 SIZE




SCREEN CONFIGURATIONS



OPTIONAL
FULL WICKET DOOR
CASEMENT OUTSWING
(INSTALLED ON INTERIOR)

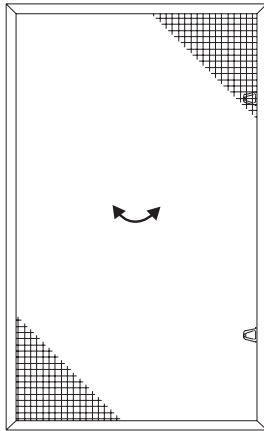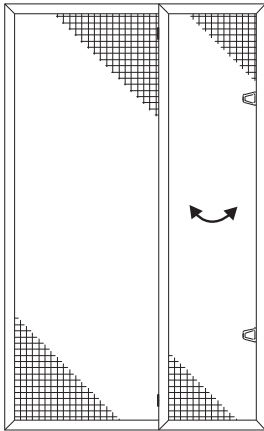



CASEMENT INSWING
(INSTALLED ON
EXTERIOR)

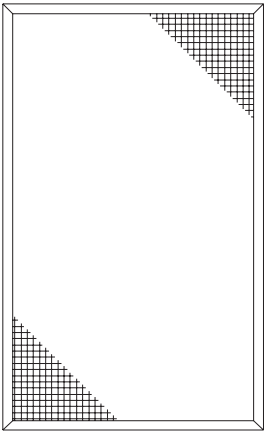



PROJECT IN
(INSTALLED ON EXTERIOR)

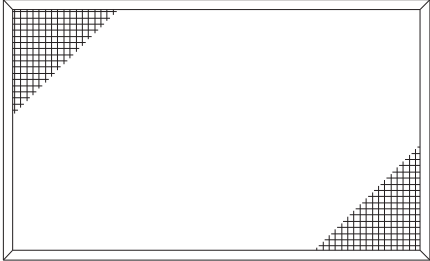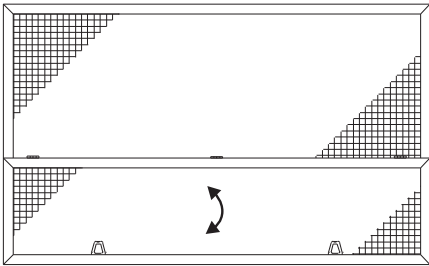



HINGED WICKET
DOUBLE CASEMENT OUTSWING
(INSTALLED ON INTERIOR)

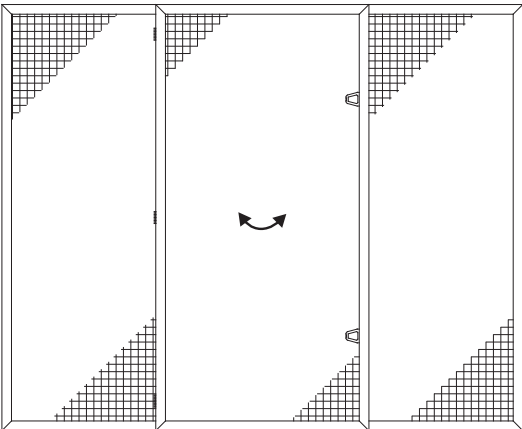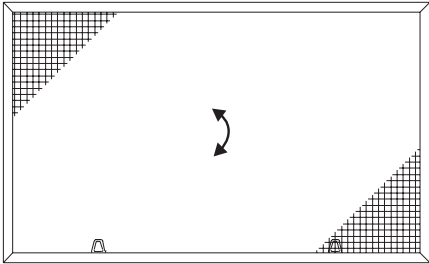

**SCREEN FOR CASEMENT OUTSWING
with CAM HANDLE
(INSTALLED ON INTERIOR)**

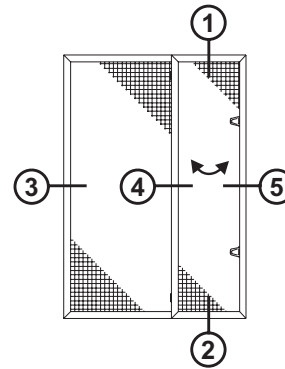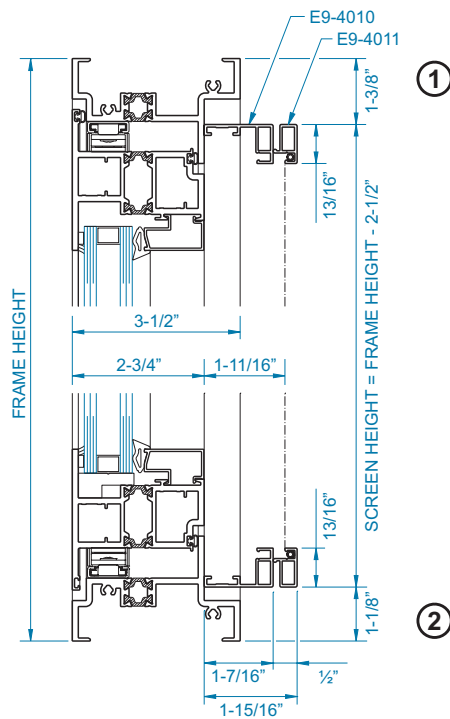


SCREEN ATTACHMENT OPTIONS

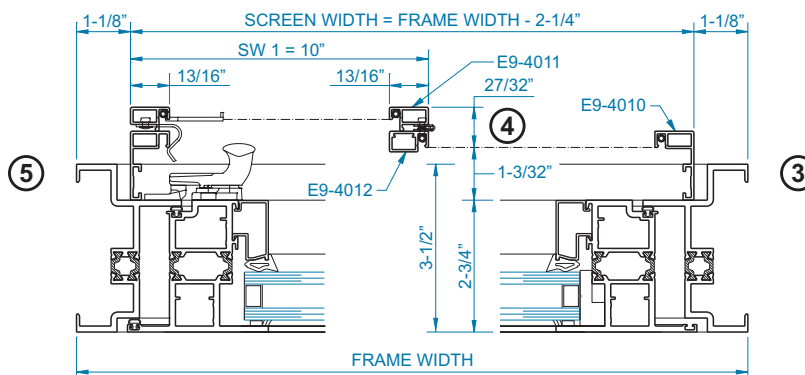
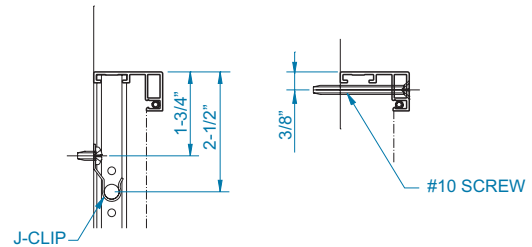


For additional information, contact YKK AP.

SCALE: 1/4 SIZE




SCREEN FOR CASEMENT OUTSWING
with MULTILOCK
(INSTALLED ON INTERIOR)

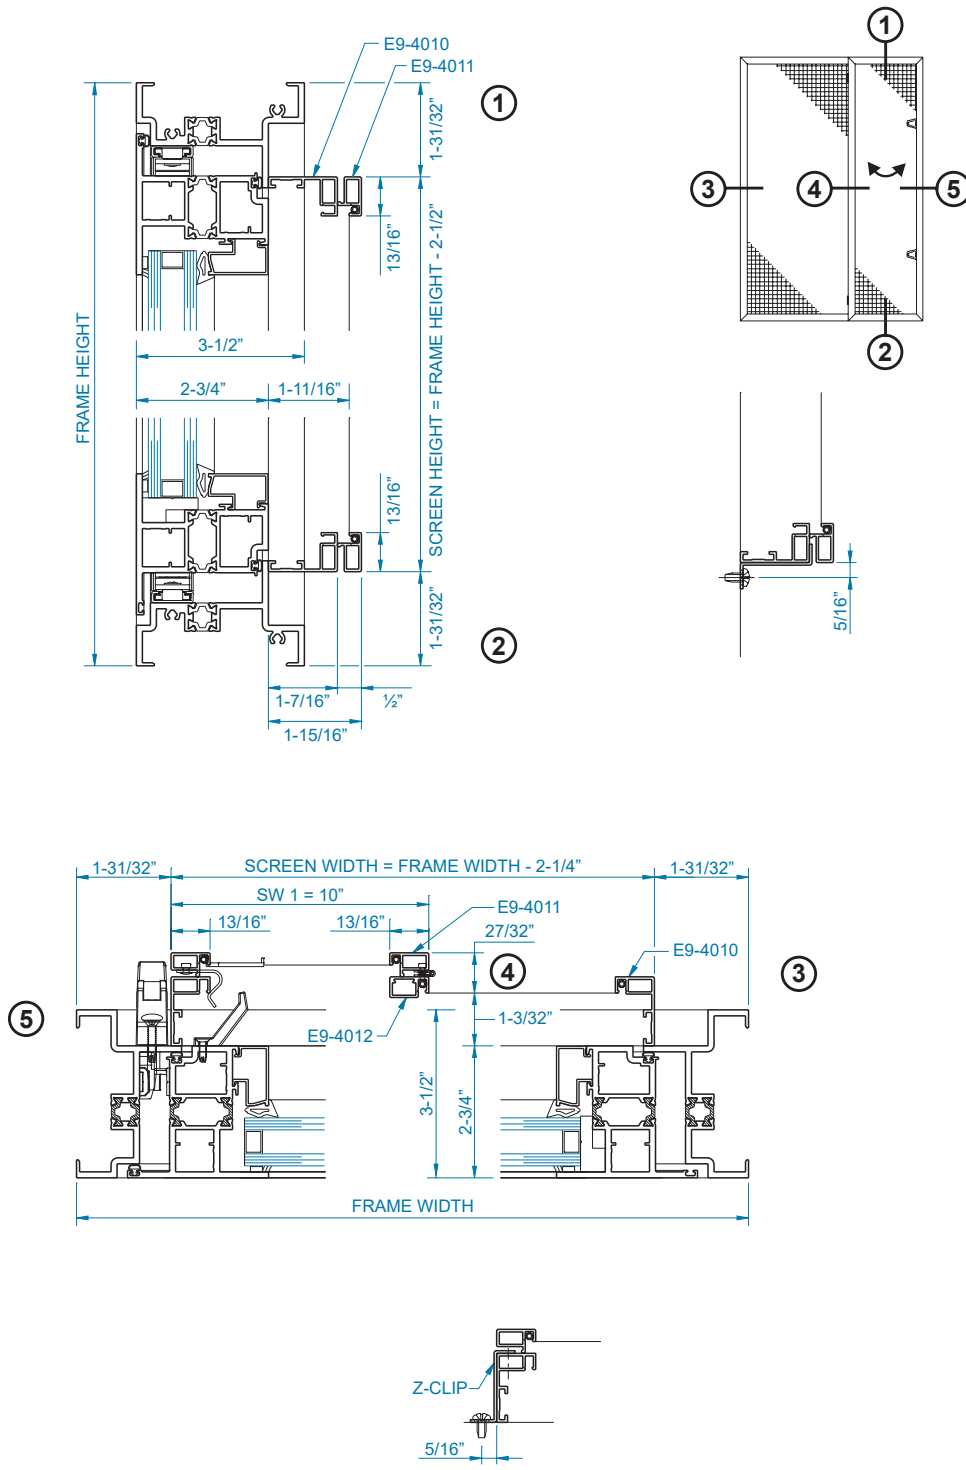


For additional information, contact YKK AP.

**SCREEN FOR PROJECT OUT
with CAM HANDLE
(INSTALLED ON INTERIOR)**

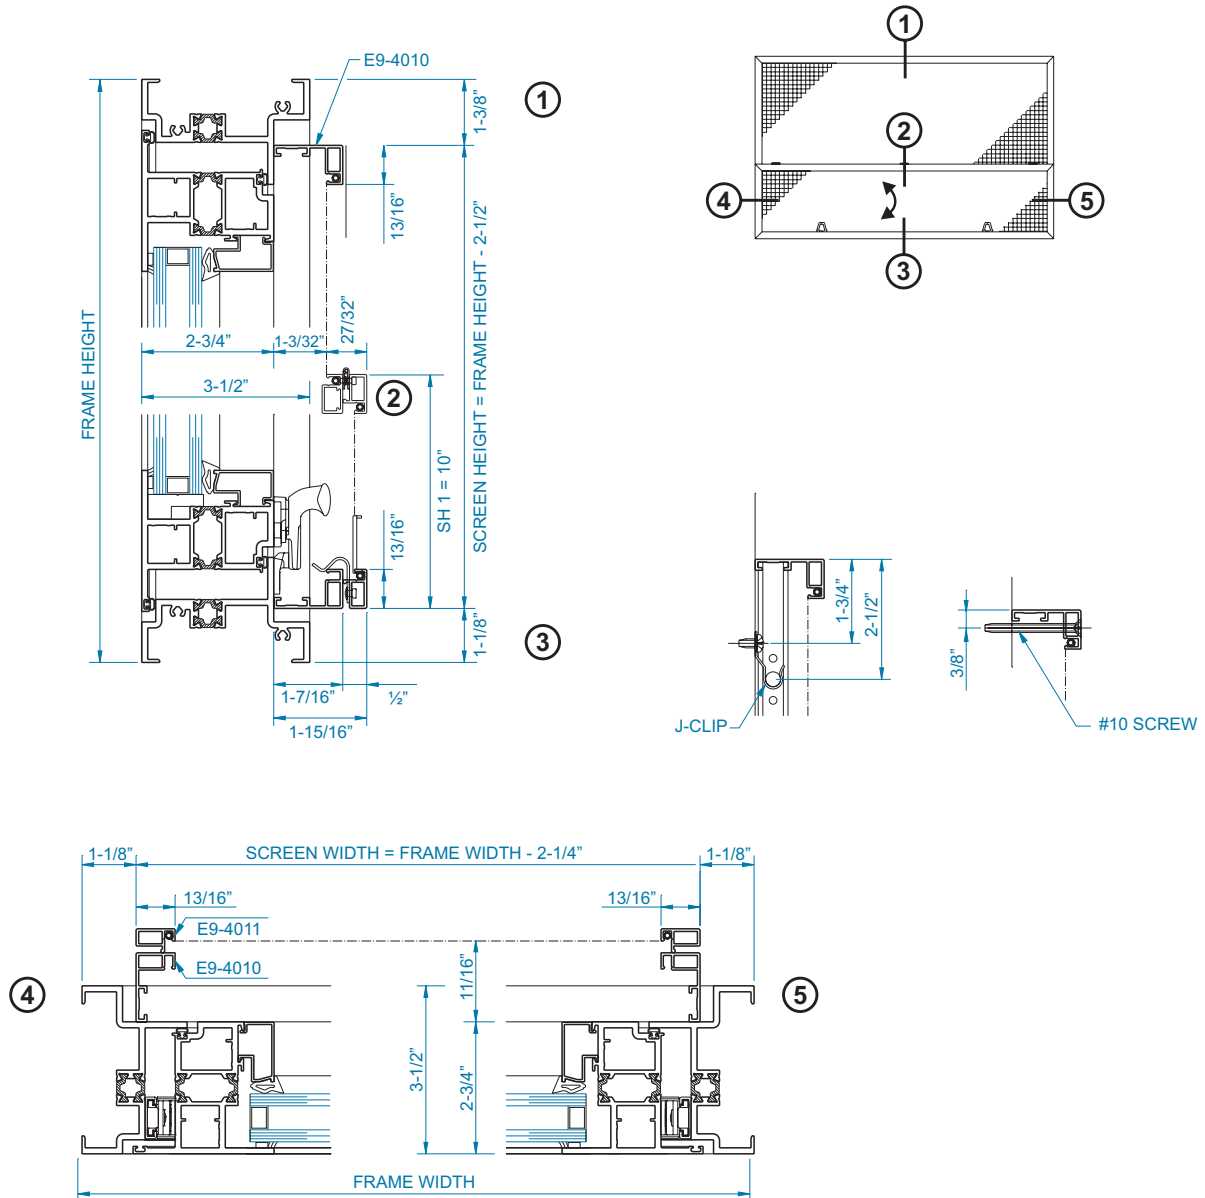


SCREEN ATTACHMENT OPTIONS




For additional information, contact YKK AP.



SCALE: 1/4 SIZE



SCREEN FOR PROJECT INSWING
with CAM HANDLE
(INSTALLED ON EXTERIOR)

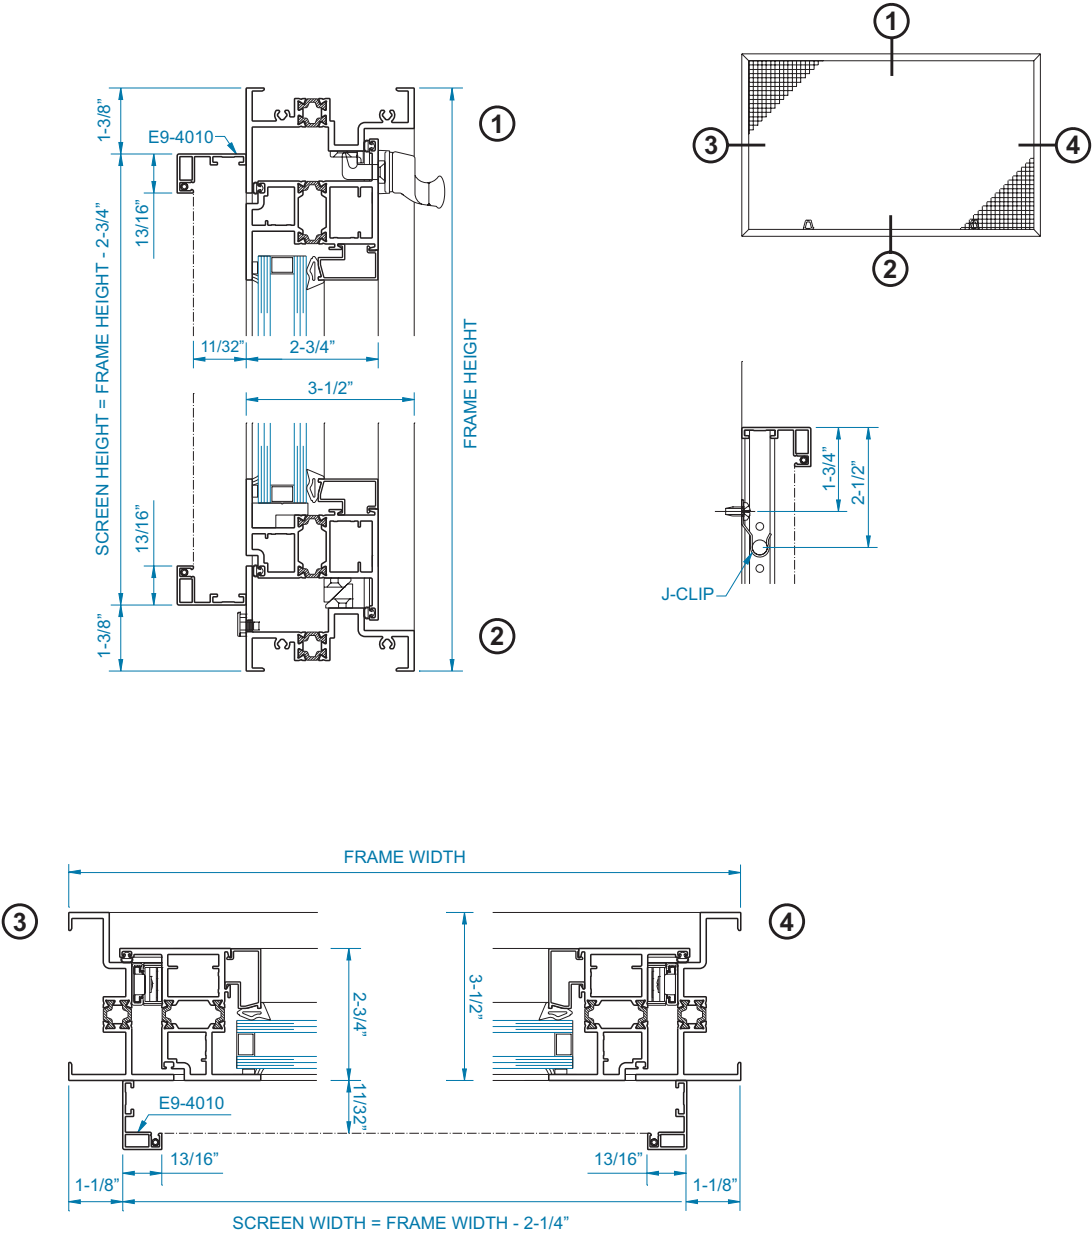


SCREEN ATTACHMENT OPTIONS




For additional information, contact YKK AP.

**SCREEN FOR CASEMENT INSWING
with CAM HANDLE
(INSTALLED ON EXTERIOR)**

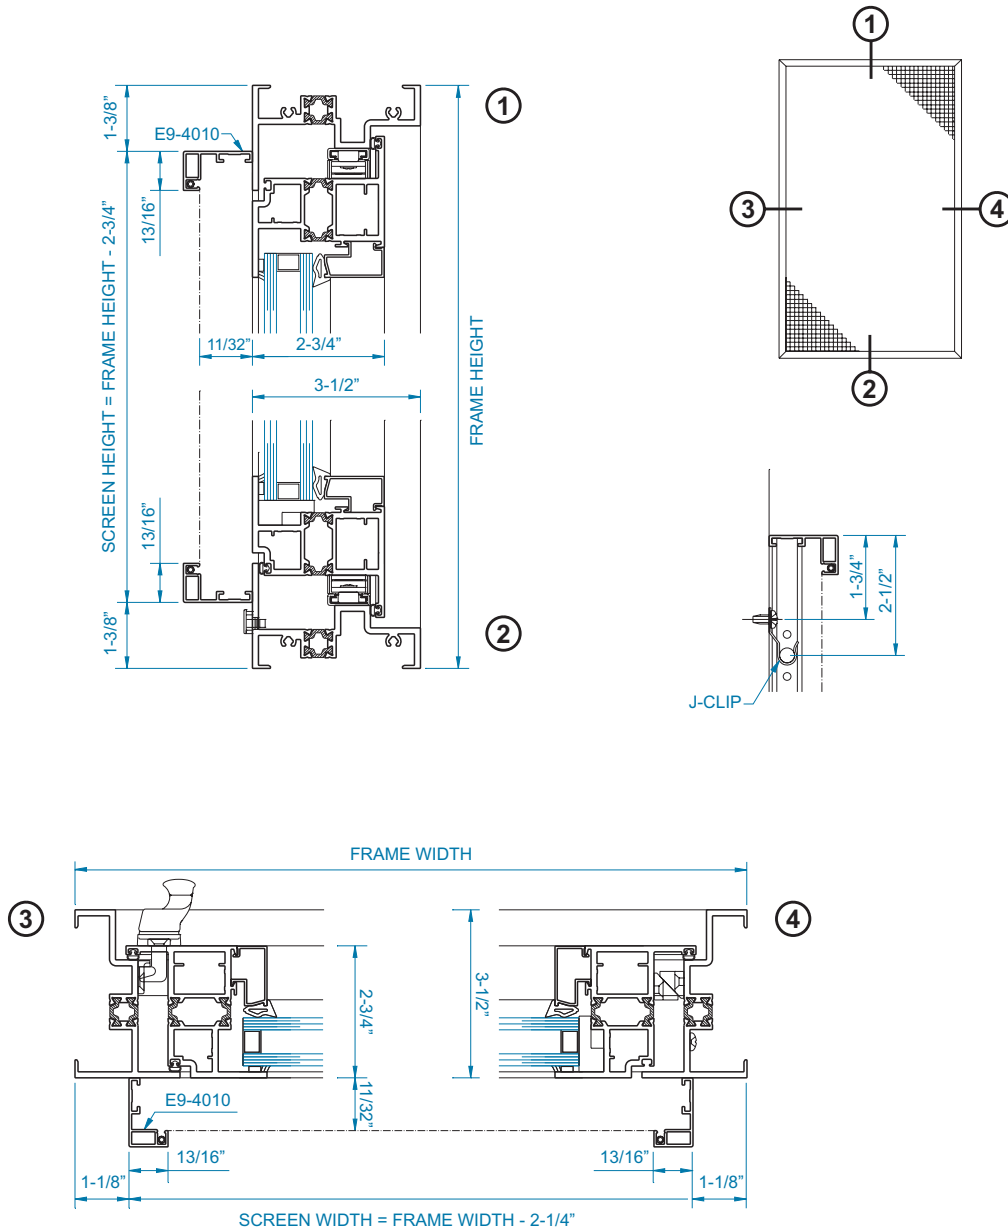


SCREEN ATTACHMENT OPTIONS





For additional information, contact YKK AP.



SCALE: 1/4 SIZE




SCREEN FOR CASEMENT OUTSWING
MASTER FRAME with CAM HANDLE
(INSTALLED ON INTERIOR)

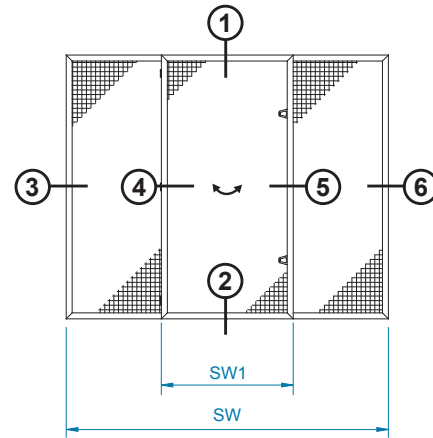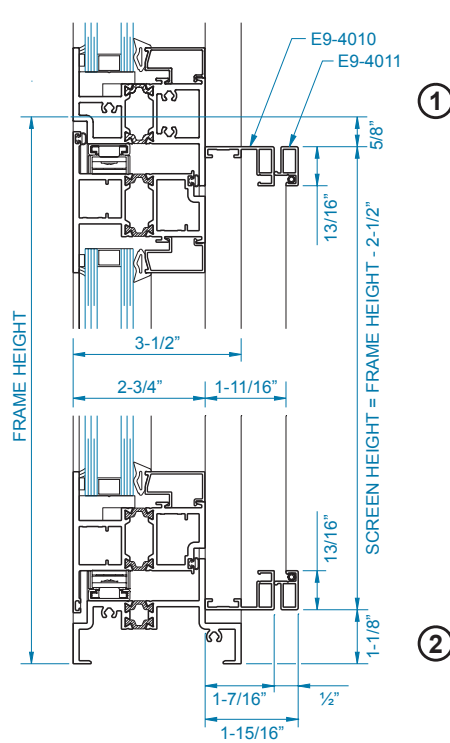

SCREEN ATTACHMENT OPTIONS

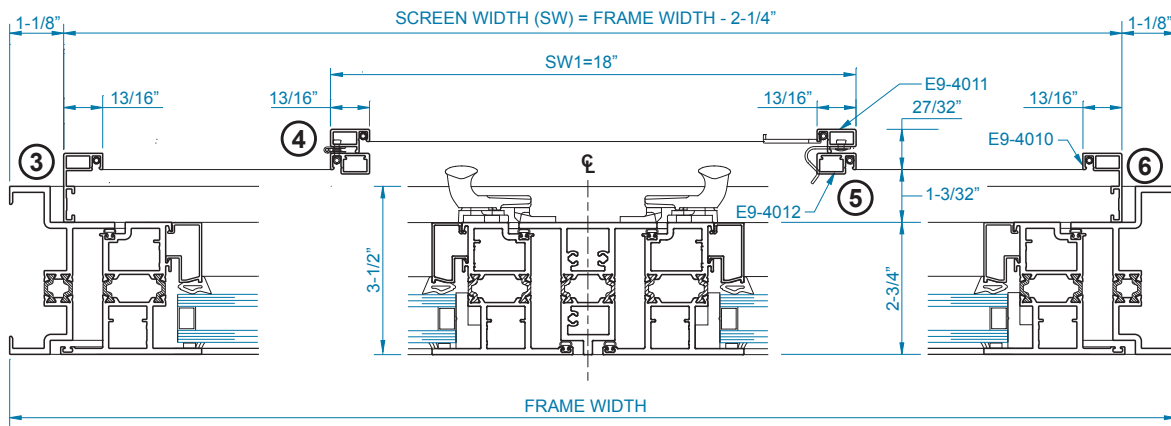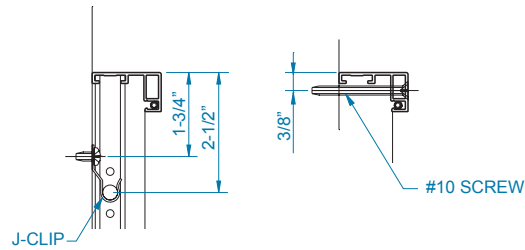


SCALE: 1/4 SIZE





For additional information, contact YKK AP.

**SCREEN FOR CASEMENT OUTSWING
MASTER FRAME with MULTILOCK
(INSTALLED ON INTERIOR)**

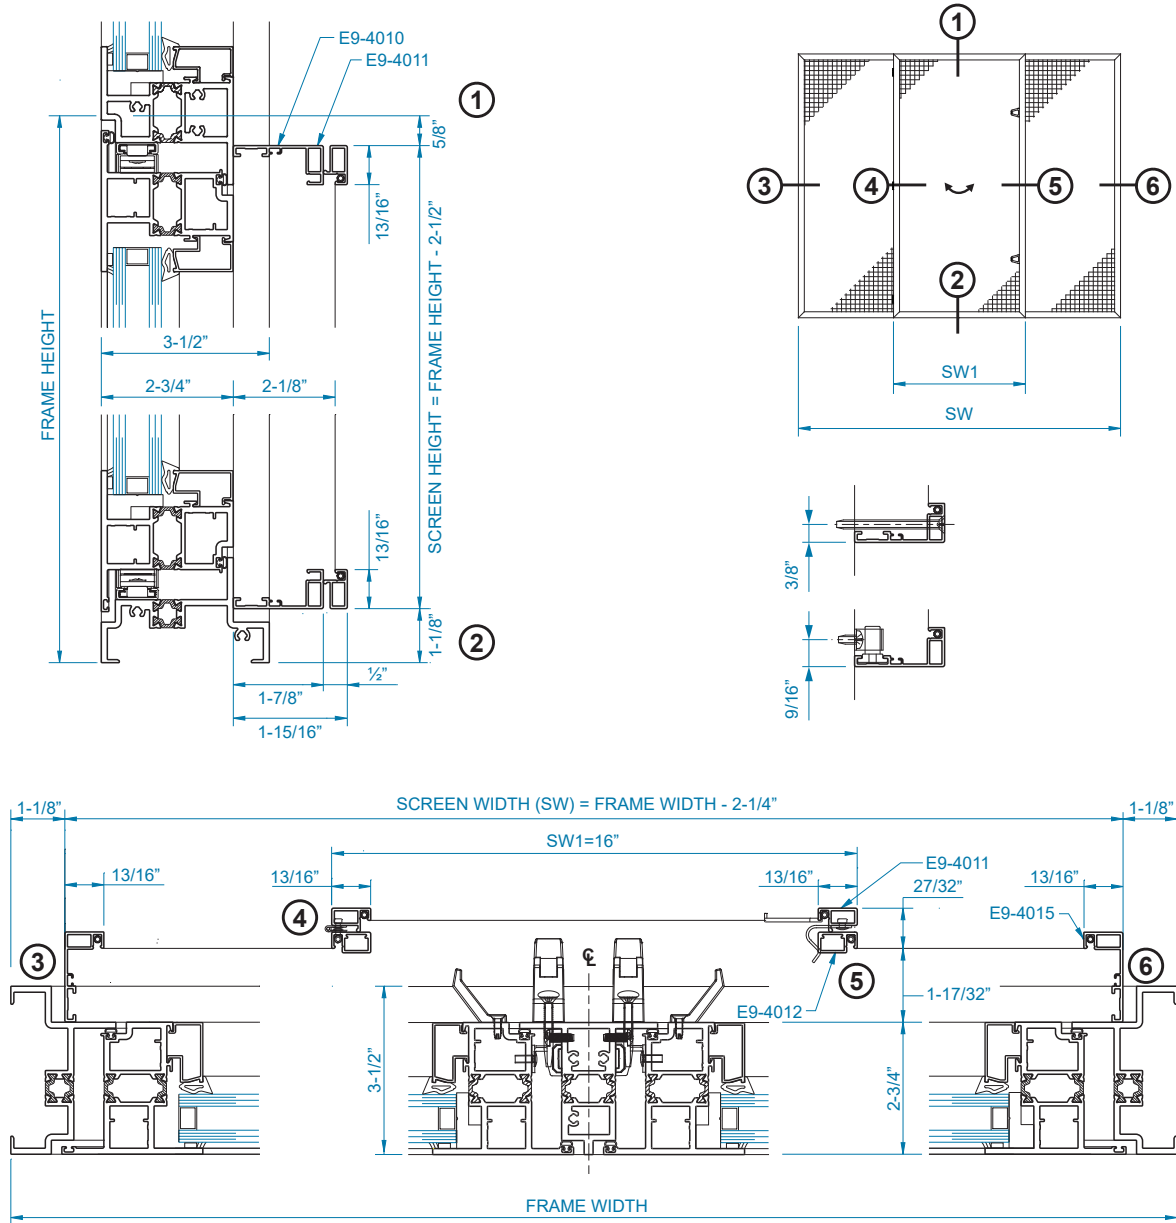


SCREEN ATTACHMENT OPTIONS

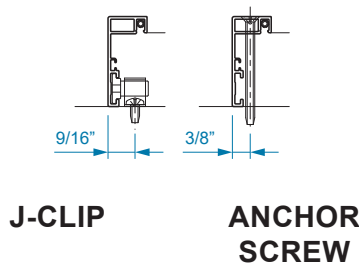

FIXED


1. SIZE LIMITATIONS: (Based on AW-100 Designation)

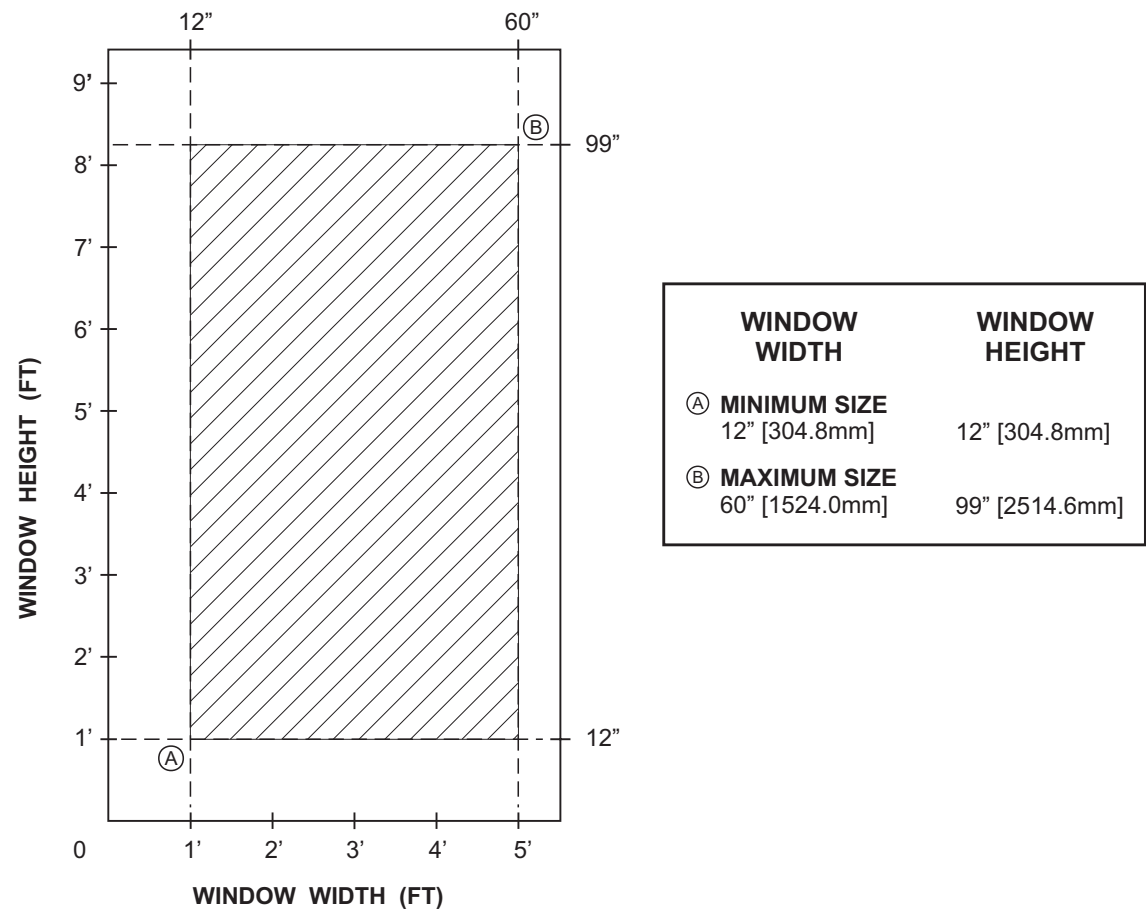

Consult wind load charts for multiple window openings.

FIXED MASTER FRAME


1. SIZE LIMITATIONS: (Based on 40 PSF Design Pressure)

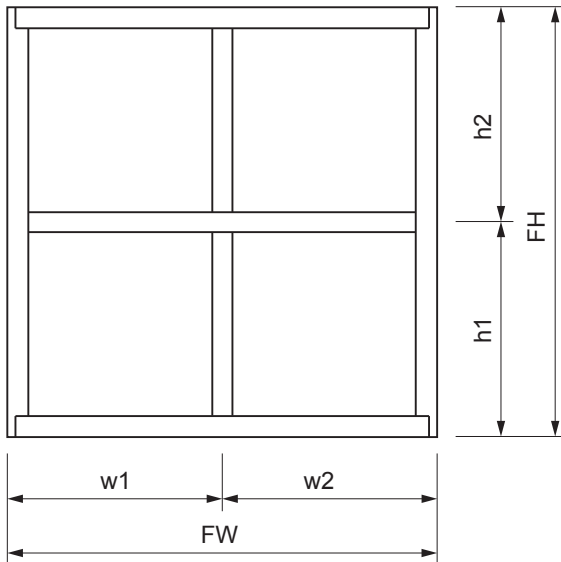

WINDOW WIDTH	WINDOW HEIGHT
MINIMUM FRAME SIZE	
29-1/4" [742.9mm]	29-1/4" [742.9mm]
MAXIMUM FRAME SIZE	
72" [1828.8mm]	84" [2133.6mm]
or	
84" [2133.6mm]	72" [1828.8mm]
Minimum w1 or w2: 14-5/8" [371.5mm]	
Maximum w1 or w2: 42" [1066.8mm]	
Minimum h1 or h2: 14-5/8" [371.5mm]	
Maximum h1 or h2: 42" [1066.8mm]	
Combined Maximum total square feet:	
42.0 sq. ft.	




CASEMENT WITH CAM HANDLE

1. SIZE LIMITATIONS: (Based on AW-80 Designation)

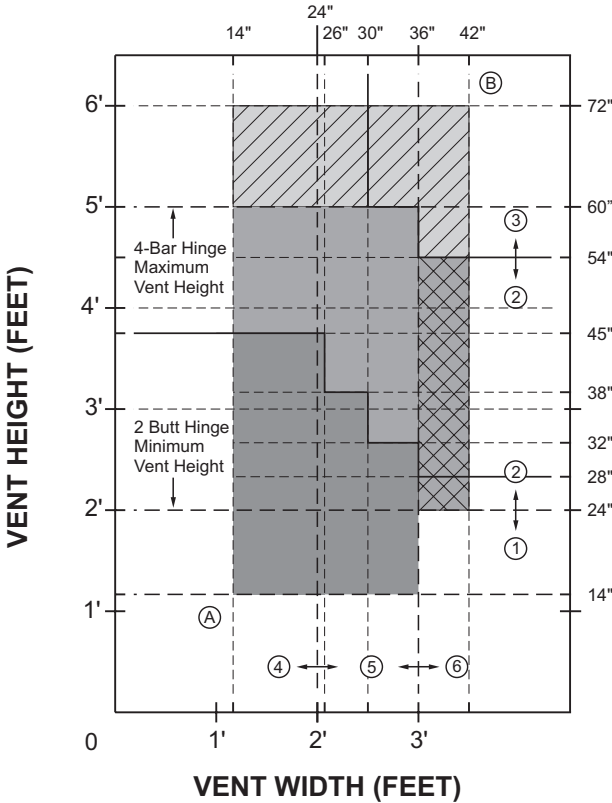

VENT WIDTH		VENT HEIGHT	
Ⓐ MINIMUM SIZE			
14" [355.6mm]		14" [355.6mm]	
When using Butt Hinges			
14" [355.6mm]		24" [609.6mm]	
Ⓑ MAXIMUM SIZE			
42" [1066.8mm]		72" [1828.8mm]	
LOCK POINTS		HINGE TYPE	
① 1 LOCK POINT		④ 12" FOUR BAR	
② 2 LOCK POINTS		⑤ 16" FOUR BAR	
③ 3 LOCK POINTS		⑥ BUTT HINGE	
		TWO BUTT HINGES ONLY	
		THREE BUTT HINGES ONLY	

2. HARDWARE LOCATIONS

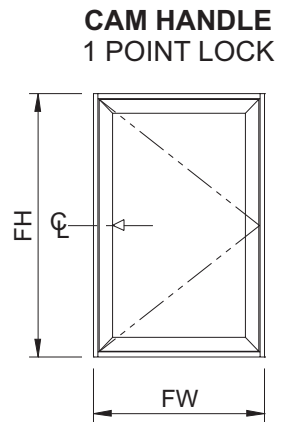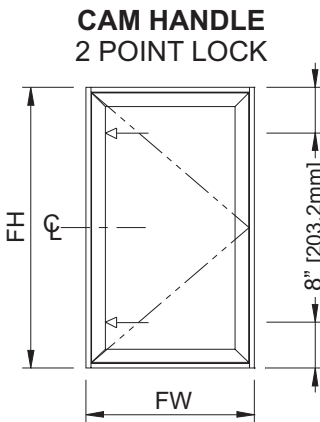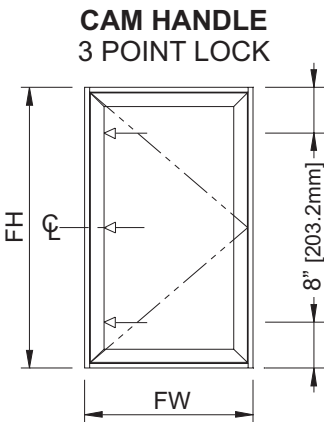


3. FOUR BAR HINGE USAGE

PART NO.	LENGTH	VENT WIDTH	MAX. WEIGHT	MAX. OPENING ANGLE
4K-14207	12"	≤ 24" [609.6mm]	83lbs [38kg]	90°
4K-14208	16"	> 24" [609.6mm]	117lbs [53kg]	90°

◁ : LOCK LOCATION


CASEMENT WITH MULTI-LOCK

1. SIZE LIMITATIONS: (Based on AW-80 Designation)

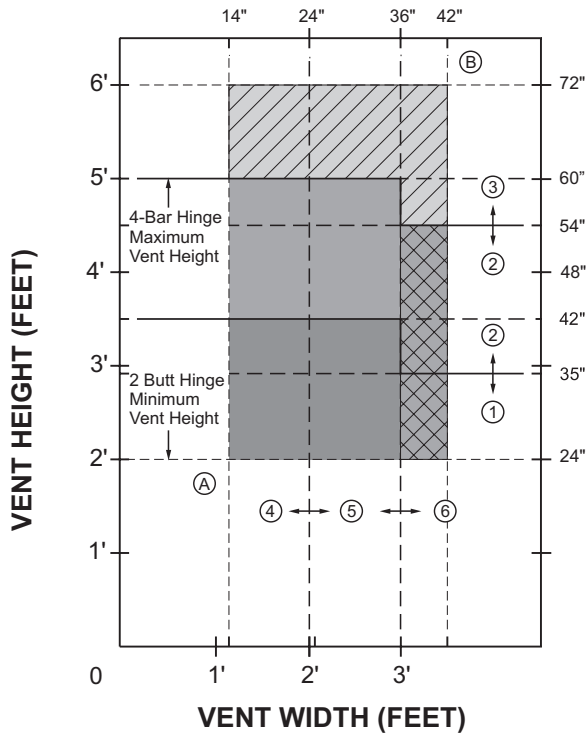

VENT WIDTH		VENT HEIGHT	
Ⓐ MINIMUM SIZE		24" [609.6mm]	
14" [355.6mm]			
Ⓑ MAXIMUM SIZE		60" [1828.8mm]	
42" [1066.8mm]			
LOCK POINTS		HINGE TYPE	
① 2 LOCK POINTS		④ 12" FOUR BAR	
② 3 LOCK POINTS		⑤ 16" FOUR BAR	
③ 4 LOCK POINTS		⑥ BUTT HINGE	
		TWO BUTT HINGES ONLY THREE BUTT HINGES ONLY	

2. HARDWARE LOCATIONS

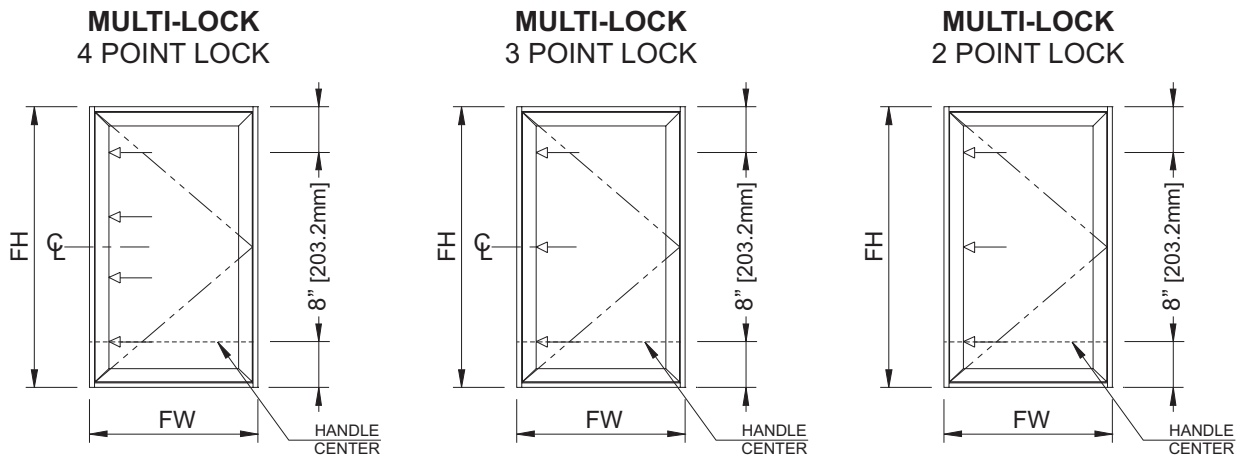


3. FOUR BAR HINGE USAGE

PART NO.	LENGTH	VENT WIDTH	MAX. WEIGHT	MAX. OPENING ANGLE
4K-14207	12"	≤ 24" [609.6mm]	83lbs [83kg]	90°
4K-14208	16"	> 24" [609.6mm]	117lbs [53kg]	90°


◁ : LOCK LOCATION

CASEMENT OUTSWING MASTER FRAME

1. SIZE LIMITATIONS: (Based on 40 PSF Design Pressure)

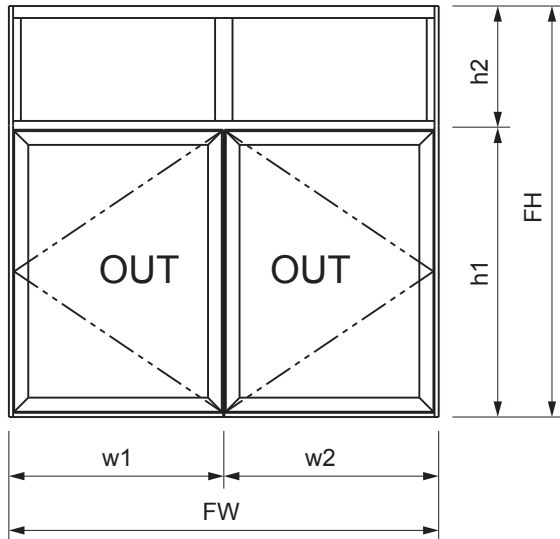


WINDOW WIDTH	WINDOW HEIGHT
MINIMUM FRAME SIZE	
4-Bar Hinge	
30-3/4" [781.1mm]	30" [762.0mm]
Butt Hinge	
30-3/4" [781.1mm]	40" [1016.0mm]
MAXIMUM FRAME SIZE	
72" [1828.8mm]	93" [2362.2mm]
Minimum w1 or w2: 15-3/8" [390.5mm]	
Maximum w1 or w2: 36" [914.4mm]	
Minimum h1: 4-Bar Hinge: 15-3/8" [390.5mm]	
Butt Hinge: 25-3/8" [644.5mm]	
Maximum h1: 60" [1524.0mm]	
Minimum h2: 14-5/8" [371.5mm]	
Maximum h2: 36" [914.4mm]	
Combined Maximum total square feet: 46.5 sq. ft.	

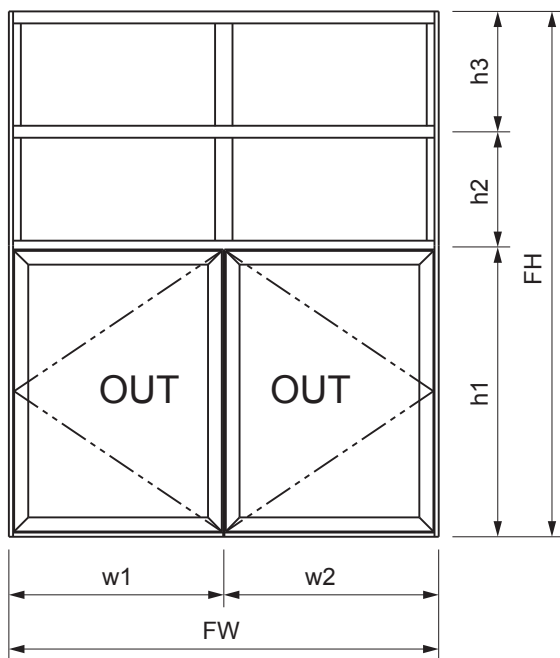

WINDOW WIDTH	WINDOW HEIGHT
MINIMUM FRAME SIZE	
4-Bar Hinge	
30-3/4" [781.1mm]	43-7/8" [1114.4mm]
Butt Hinge	
30-3/4" [781.1mm]	53-7/8" [1368.4mm]
MAXIMUM FRAME SIZE	
72" [1828.8mm]	108" [2743.2mm]
Minimum w1 or w2: 15-3/8" [390.5mm]	
Maximum w1 or w2: 36" [914.4mm]	
Minimum h1: 4-Bar Hinge: 15-3/8" [390.5mm]	
Butt Hinge: 25-3/8" [644.5mm]	
Maximum h1: 60" [1524.0mm]	
Minimum h2: 13-7/8" [352.4mm]	
Maximum h2: 36" [914.4mm]	
Minimum h3: 14-5/8" [371.5mm]	
Maximum h3: 36" [914.4mm]	
Combined Maximum total square feet: 54.0 sq. ft.	



PROJECT

1. SIZE LIMITATIONS: (Based on AW-80 Designation)

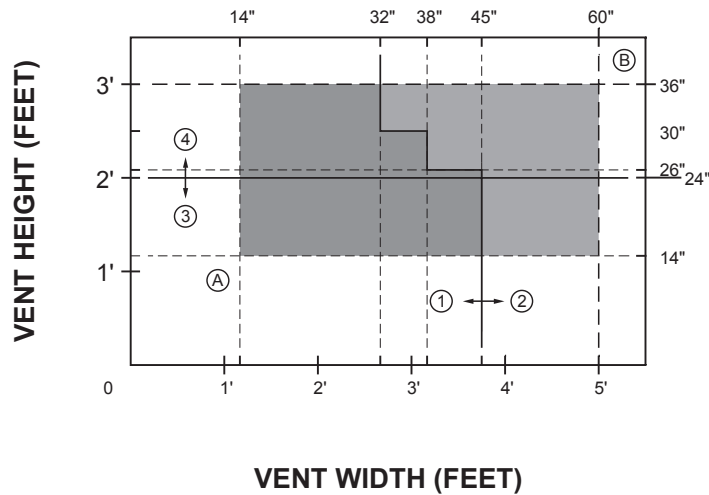

VENT WIDTH		VENT HEIGHT	
Ⓐ MINIMUM SIZE		14" [355.6mm]	
Ⓑ MAXIMUM SIZE		60" [1524.0mm]	
LOCK POINTS		HINGE TYPE	
① 1 LOCK POINT		③ 12" FOUR BAR	
② 2 LOCK POINTS		④ 16" FOUR BAR	

2. HARDWARE LOCATIONS

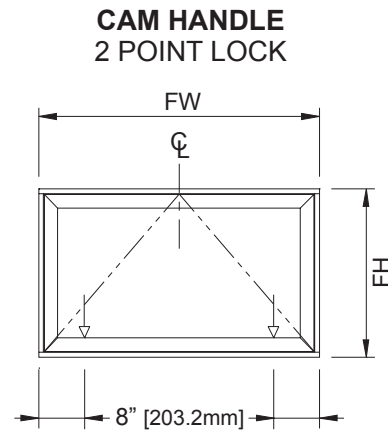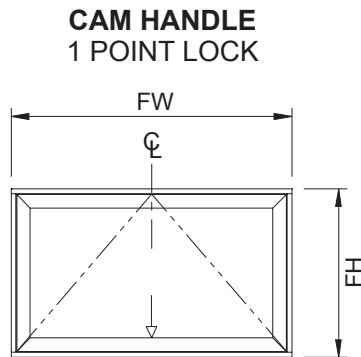


3. FOUR BAR HINGE USAGE

PART NO.	LENGTH	VENT HEIGHT	MAX. WEIGHT	MAX. OPENING ANGLE
4K-14207	12"	≤ 24" [609.6mm]	97lbs [44kg]	40° w/Limit Stop
5K-15284	16"	> 24" [609.6mm]	145lbs [66kg]	30° w/o Limit Stop

◁ : LOCK LOCATION

DUAL / TRIPLE GLAZING / DUAL GLAZING WITH 1" BLINDS


1. SIZE LIMITATIONS: (Based on AW-80 Designation)

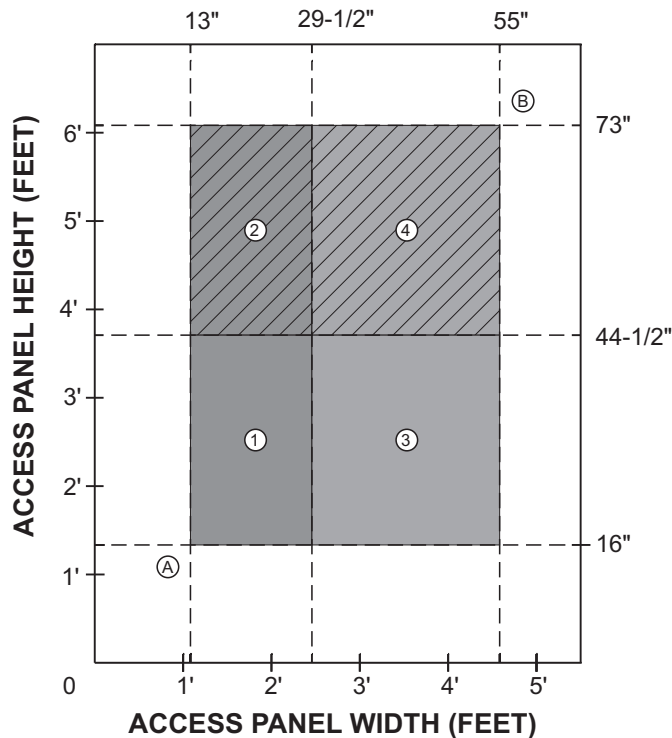

PANEL WIDTH	PANEL HEIGHT
Ⓐ MINIMUM SIZE 13" [330.2mm]	16" [406.4mm]
Ⓑ MAXIMUM SIZE 55" [1397.0mm]	73" [1854.2mm]
LOCK POINTS	
① 2 LOCK POINTS	④ 4 LOCK POINTS
② 4 LOCK POINTS	⑤ 6 LOCK POINTS


△ : LOCK LOCATION

2. HARDWARE LOCATIONS

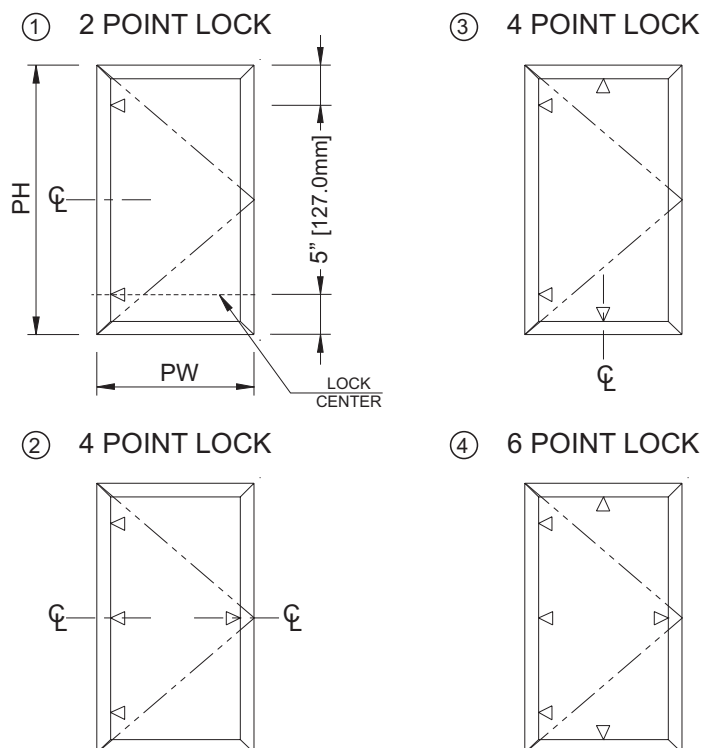

TRIPLE GLAZING WITH 5/8" BLINDS

1. SIZE LIMITATIONS: (Based on AW-80 Designation)

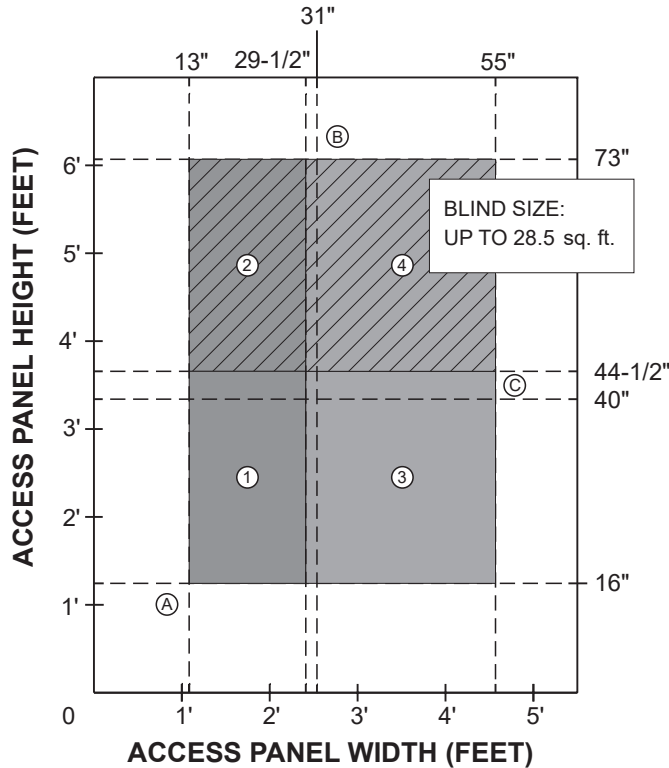


PANEL WIDTH	PANEL HEIGHT
Ⓐ MINIMUM SIZE 13" [330.2mm]	16" [406.4mm]
Ⓑ MAXIMUM SIZE 31" [787.4mm]	73" [1854.2mm]
Ⓒ MAXIMUM SIZE 40" [1016.0mm]	40" [1016.0mm]
LOCK POINTS	
Ⓐ 2 LOCK POINTS	Ⓒ 4 LOCK POINTS
Ⓑ 4 LOCK POINTS	Ⓓ 6 LOCK POINTS

△ : LOCK LOCATION



Note: As a result of less blind overlap than the 1" blind, expect a 30% increase of light infiltration with the use of 5/8" blinds.

2. HARDWARE LOCATIONS

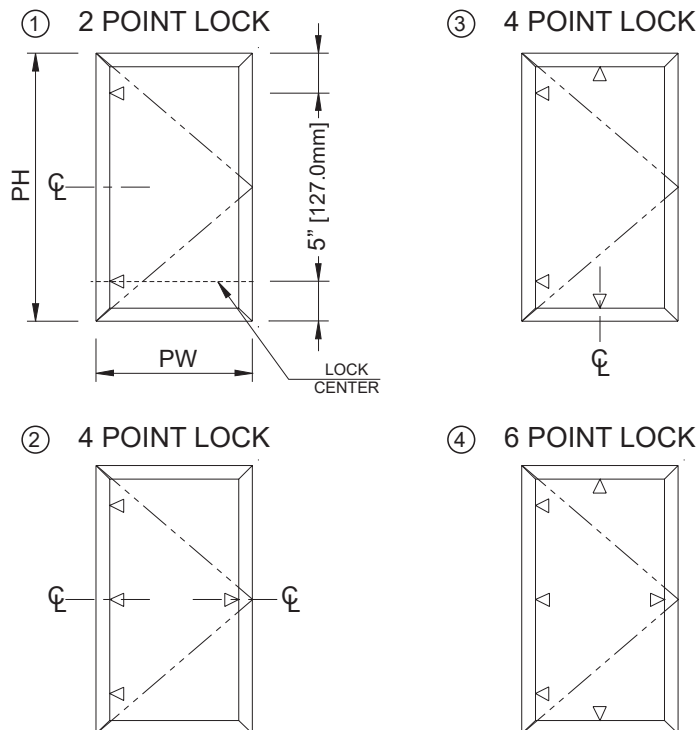

PROJECT OUT MASTER FRAME

1. SIZE LIMITATIONS: (Based on 40 PSF Design Pressure)

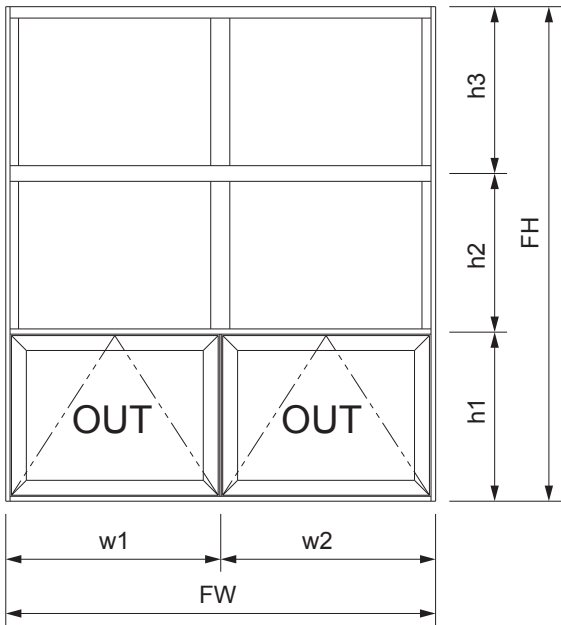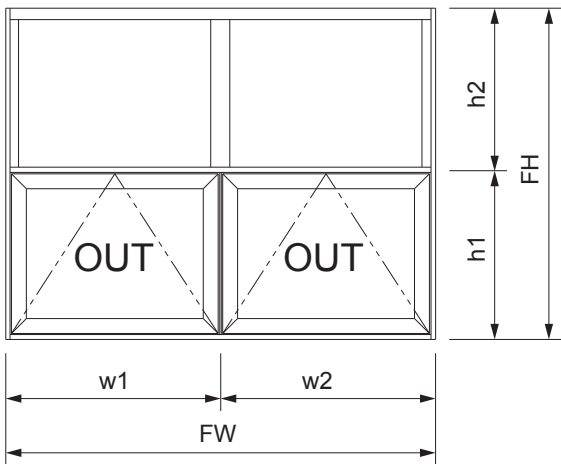

WINDOW
WIDTH

WINDOW
HEIGHT

Based on Manufacturing Limits

MINIMUM FRAME SIZE

30-3/4" [781.1mm] 30" [762.0mm]

MAXIMUM FRAME SIZE

72" [1828.8mm] 93" [2362.2mm]

Minimum w1 or w2: 15-3/8" [390.5mm]

Maximum w1 or w2: 37" [939.8mm]

Combined Maximum total square feet: 47.8 sq. ft.

Based on Manual Glazing

MAXIMUM FRAME SIZE

84" [2133.6mm] 93" [2362.2mm]

Maximum w1 or w2: 42" [1066.8mm]

Combined Maximum total square feet: 47.8 sq. ft.

Minimum h1: 15-3/8" [390.5mm]

Maximum h1: 36" [914.4mm]

Minimum h2: 14-5/8" [371.5mm]

Maximum h2: 57" [1447.8 mm]

WINDOW
WIDTH

WINDOW
HEIGHT

Based on Manufacturing Limits

MINIMUM FRAME SIZE

30-3/4" [781.1mm] 43-7/8" [762.0mm]

MAXIMUM FRAME SIZE

74" [1879.6mm] 108" [2743.2mm]

Minimum w1 or w2: 15-3/8" [390.5mm]

Maximum w1 or w2: 37" [939.8mm]

Combined Maximum total square feet: 55.5 sq. ft.

Based on Manual Glazing

MAXIMUM FRAME SIZE

84" [2133.6mm] 108" [2743.2mm]

Maximum w1 or w2: 42" [1066.8mm]

Combined Maximum total square feet: 47.8 sq. ft.

Minimum h1: 15-3/8" [390.5mm]

Maximum h1: 36" [914.4mm]

Minimum h2: 13-7/8" [352.4mm]

Maximum h2: 36" [914.4 mm]

Minimum h3: 14-5/8" [371.5mm]


Maximum h3: 36" [914.4mm]

ACCESS PANEL HANDING

FIXED


RH	RH	RH

HANDING BY LOCATION

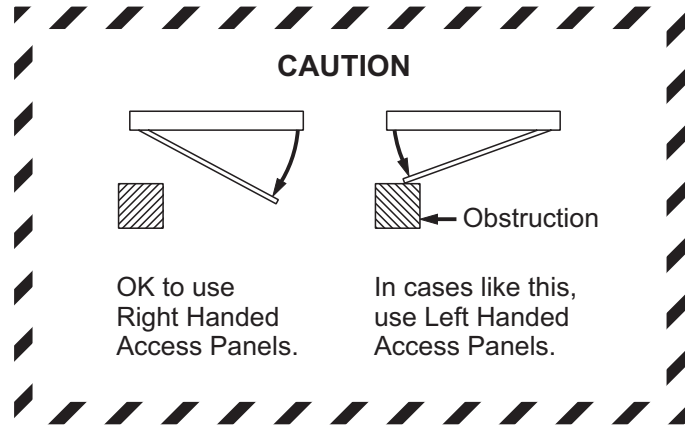

CASEMENT

FOR VENT	RH	LH	RH	LH	RH	LH
FOR FIXED			RH	LH	RH	LH







Handing

To determine correct handing, picture yourself standing with your back to the pivot jamb. If panel swings to the left it is a left hand panel. If it swings to the right, it is a right hand panel.





PROJECTED

FOR VENT	RH	RH	RH	RH	RH	RH
FOR FIXED		RH	RH	RH	RH	RH

HARDWARE & ACCESSORIES

NAME	DETAIL	DESCRIPTION	MATERIAL
1" BLIND ASSEMBLY		Blind assembly consisting of extruded aluminum headrail, bottom rail, and slats of .006" roll formed aluminum with baked on enamel finish.	ALUMINUM
5/8" BLIND ASSEMBLY		Blind assembly consisting of extruded aluminum headrail, bottom rail, and slats of .006" roll formed aluminum with baked on enamel finish. Note: Blind size is limited to 15 square feet.	ALUMINUM
BLIND TILT KNOBS	       	Tilt Knob Straight (Standard) Tilt Knob Extended (Standard) Tilt Knob Straight (7/16" Hex Knob) Tilt Knob Angled Tilt Knob Vertical Mount Angled (7/16" Hex Knob) Tilt Knob Vertical Mount Angled w/ Tilt Wand and U-Joint Tilt Knob Surface Mount, Low Profile Tilt Knob Removeable Key Operator (Requires Key)	—

HARDWARE & ACCESSORIES

NAME	DETAIL	DESCRIPTION	MATERIAL
ACCESS PANEL LOCK ASSEMBLY		Custodial two-piece lock operated by removable key.	BLACK POLYAMIDE ZINC
REMOVABLE KEY		Key for operating access panel custodial lock assembly.	STEEL
GUIDE BLOCK		Positions access panel sash for locking.	BLACK POLYAMIDE
TOP PIVOT BASE LH		Top pivot guide for access panel, handed operation.	STAINLESS STEEL
BOTTOM PIVOT BASE		Bottom pivot base for access panel.	BLACK POLYAMIDE
AT PLUG		Blocks air movement at glass stop.	BLACK EVA SPONGE
D-ROD HOLDER		Slotted 1-1/2" diameter, 2" long polyurethane foam. D-rod is inserted in slot, then both are inserted into glass stop pocket.	POLYURETHANE FOAM