

DOOR OPENING CLEARANCE


Single Acting Door

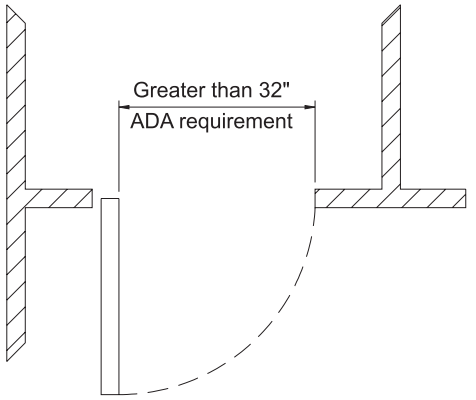


Double Acting Door

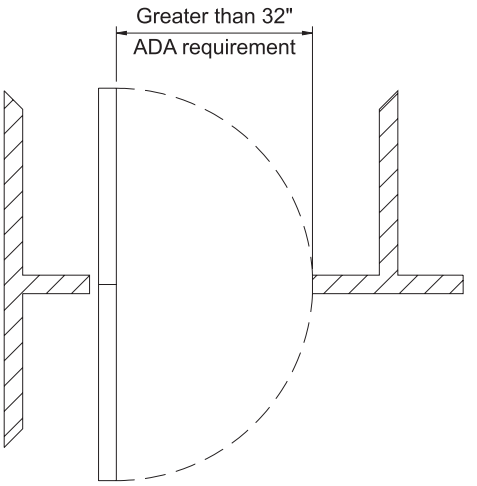

STANDARD ENTRANCE HARDWARE LOCATION

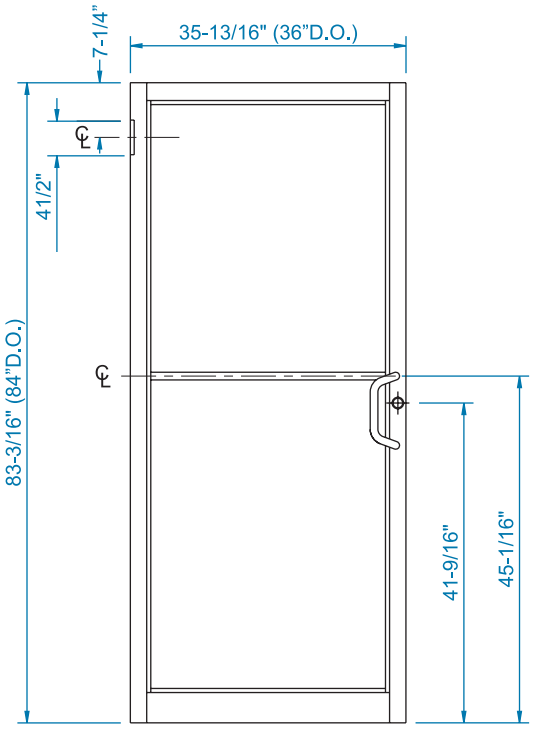

Standard Hardware
MS Hookbolt Lock with Thumbturn
Smart Series Push/Pull
Pair of Standard Butt Hinges
1-1/2 pair for doors over 90"

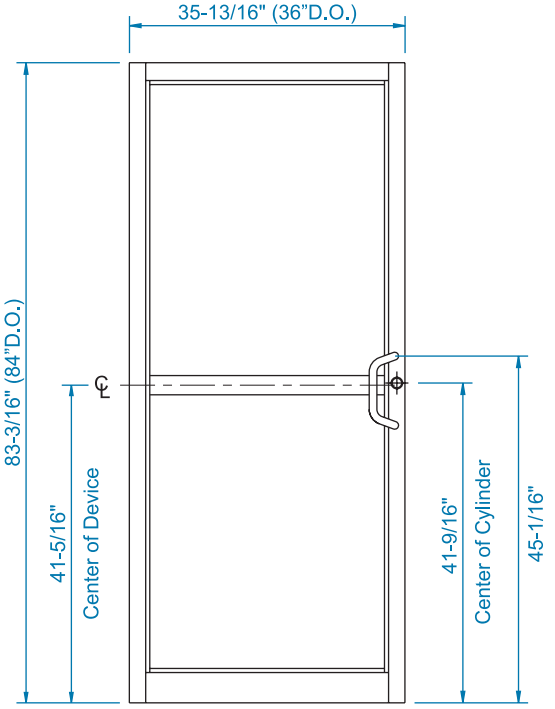


Standard Exit Devices
YKK AP Standard Rim Panic
With YKK AP Smart Series Pull


NOTE: All dimensions shown are for actual door leaf.
Standard floor clearance = 11/16".
Clearance plus hardware location dimensions = height above finished floor. May vary by door bottom clearance requirements.

STANDARD ENTRANCE HARDWARE LOCATION

NOTE: All dimensions shown are for actual door leaf.

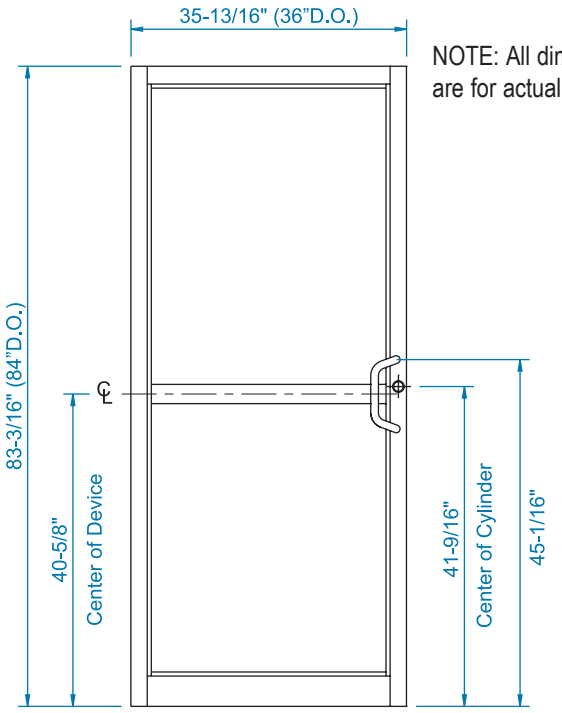


Standard Exit Devices
YKK AP Standard CVR Panic
With YKK AP Smart Series Pull

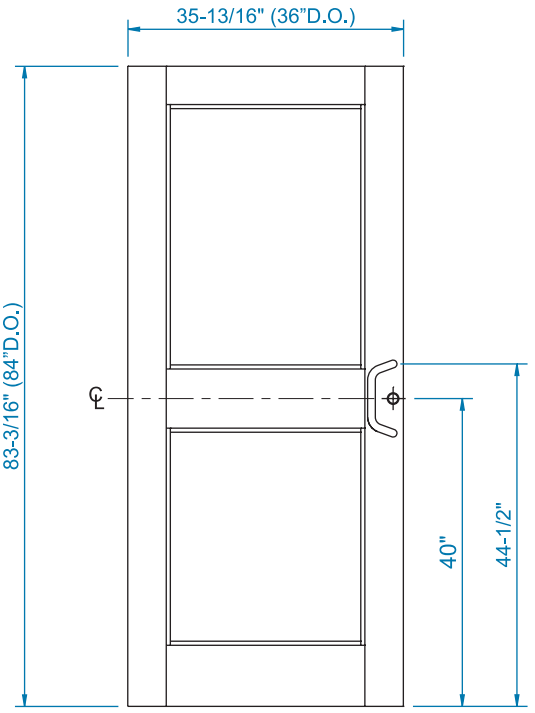


Mid-rail Exit
YKK AP Standard Midpanel Panic
With Smart Series Pull

OPTIONAL ENTRANCE HARDWARE LOCATION

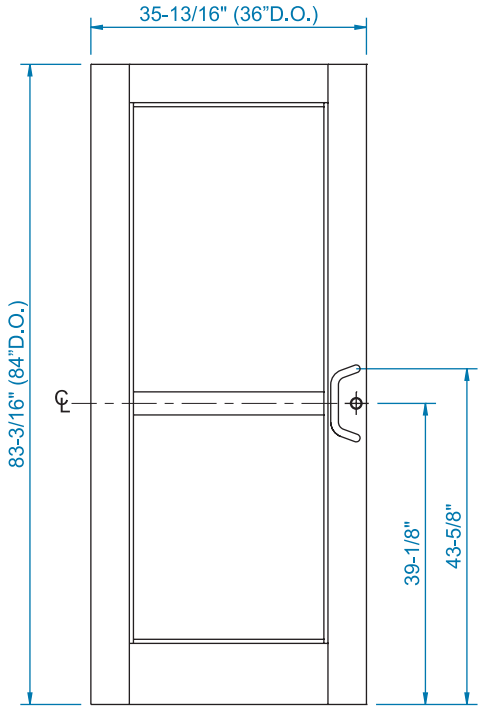


Optional Exit Devices-Single Door
Von Duprin® 33 Series Rim
Von Duprin® 99 Series Rim (50D&50M only)
With Smart Series Pull

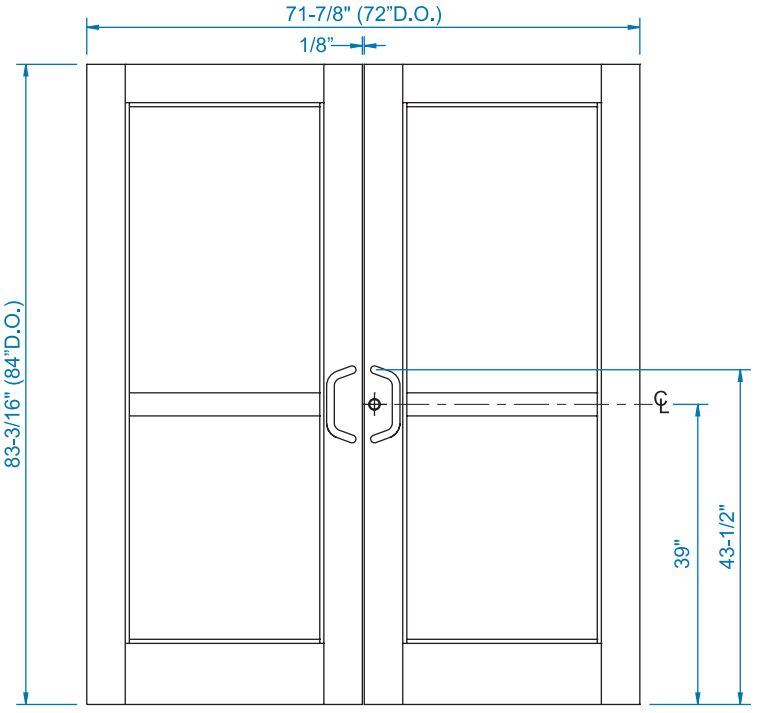


Optional Exit Devices-Pair Doors
Von Duprin® 33 Series Rim
Von Duprin® 99 Series Rim (50D&50M only)
With Smart Series Pull

OPTIONAL ENTRANCE HARDWARE LOCATION

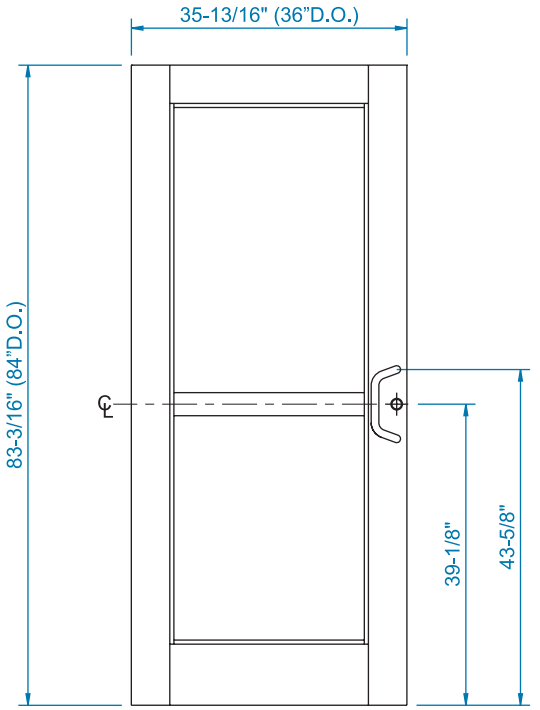


Optional Exit Devices
Von Duprin® 3347 Series CVR
With Smart Series Pull

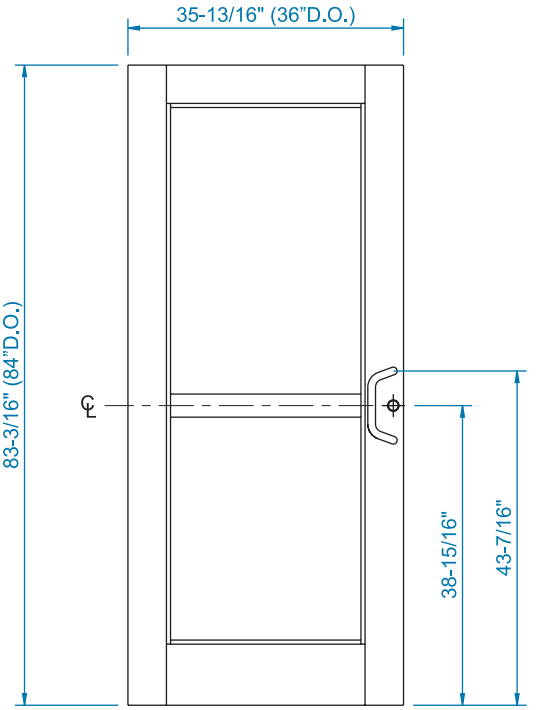

Optional Exit Devices
Von Duprin® 9947 Series CVR
(50D & 50M only)
With Smart Series Pull

NOTE: Continuous hinges are mounted flush with top of door

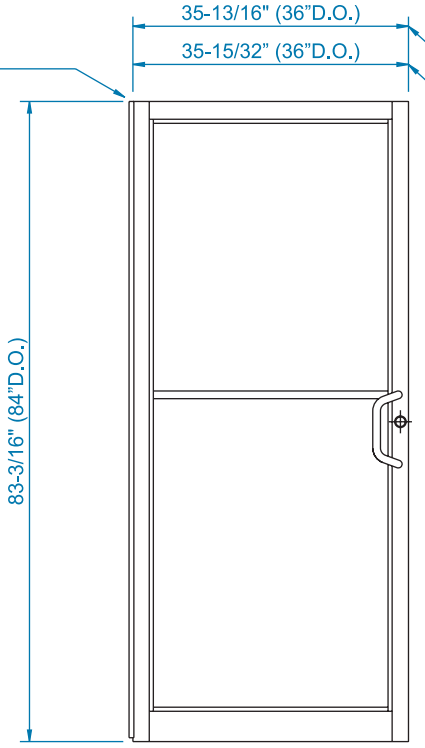


Models 25T/35T/50T, 35XT/50XT and 35H only.

All Other Doors.

Continuous Hinge
MS Hookbolt Lock with Thumbturn
YKK AP Smart Series Push/Pull
Select® SL27HD (35H/50H Door)
Roton® 780-226HD (35H, 40M/50M Doors)
Roton® 780-224HD (20D/35D/50D Doors)
Roton® 780-111HD (25T/35T/50T and 35XT/50XT Doors)

NOTE: All dimensions shown are for actual door leaf.
Standard floor clearance = 11/16".
Clearance plus hardware location dimensions = height above finished floor. May vary by door bottom clearance requirements.

CALIFORNIA COMPLIANT HARDWARE LOCATION

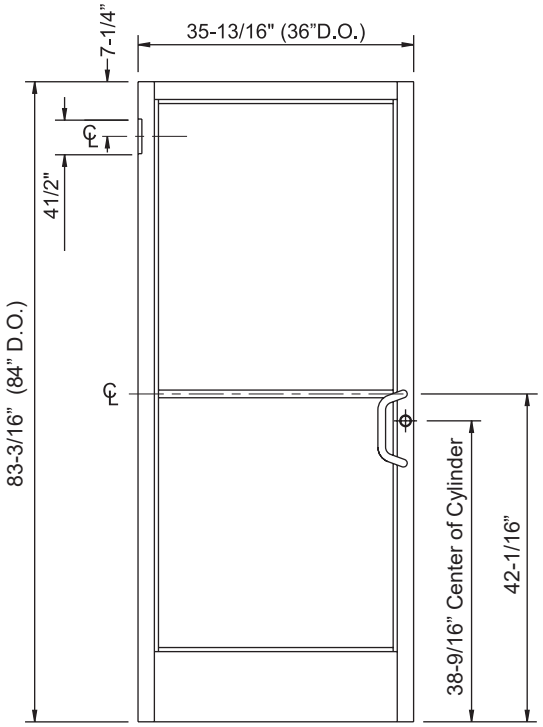

Standard Hardware
MS Hookbolt Lock with Thumbturn
Smart Series Push/Pull
Pair of Standard Butt Hinges
1-1/2 pair for doors over 90”

NOTE: All dimensions shown are for actual door leaf.
Standard floor clearance = 11/16".
Clearance plus hardware location dimensions = height above finished floor. May vary by door bottom clearance requirements.

Reference California Building Code:
Chapter 11 B - Accessiblility to Public Buildings, Public Accommodations, Commercial Buildings, and Public Housing