


**YKK
ap**®

Commercial
Standard Entrance
Hardware

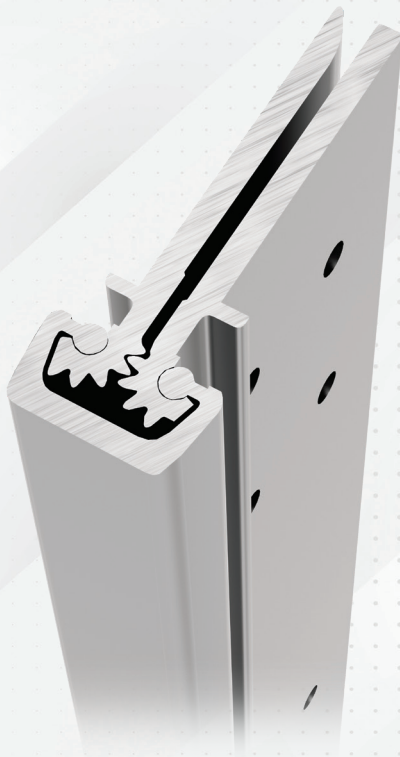

Description

- Heavy duty for high-frequency doors or heavy, medium frequency doors.
- Conforms to ANSI A156.26 for A31011G.
- Continuous geared hinges use a rotating joint to minimize lateral wear on the hinge while evenly distributing door weight along with the full length of the frame.
- Frame leaf alignment rib for proper hinge and door location.
- Door edge protection lip on the hinge.

Compatible Entrances

20D/35D/50D, 35HL/50HL, & 25FD

Material Composition

Aluminum 6063-T6

Finishes

Coated Finish: 628 Clear or 335 Black

Application

Active leg of hinge stile wraps door stile for greater strength. Specific glass formulas are required.

Hardware Vendor



Vendor Part or Series

Hager Roton 780 Series - 780-224HD

Certifications

- BHMA ANSI A156.26
- UL10C Positive Pressure Rated
- UL10B Neutral Pressure Rated

21-5023-00

H-20100

Standard Heavy Duty Continuous Hinge