


**YKK
AP**

Commercial
Standard Entrance
Hardware

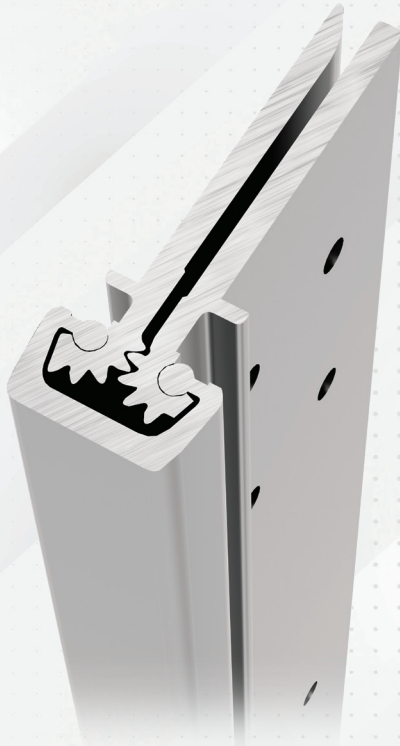

Description

- Heavy duty for high-frequency doors or heavy, medium frequency doors.
- Conforms to ANSI A156.26 for A31011G.
- Continuous geared hinges use a rotating joint to minimize lateral wear on the hinge while evenly distributing door weight along with the full length of the frame.
- Frame leaf alignment rib for proper hinge and door location.
- Door edge protection lip on the hinge.

Compatible Entrances

25T/35T/50T & 35XT/50XT

Material Composition

Aluminum 6063-T6

Finishes

Coated Finish: 628 Clear or 335 Black

Application

Hinge Stile includes mortised edge to allow standard glass formulas to be used.

Hardware Vendor



Vendor Part or Series

Hager Roton 780 Series - 780-111HD

Certifications

- BHMA ANSI A156.26
- UL10C Positive Pressure Rated
- UL10B Neutral Pressure Rated

21-5026-00

P-26005

Standard Heavy Duty Continuous Hinge