


Hardware

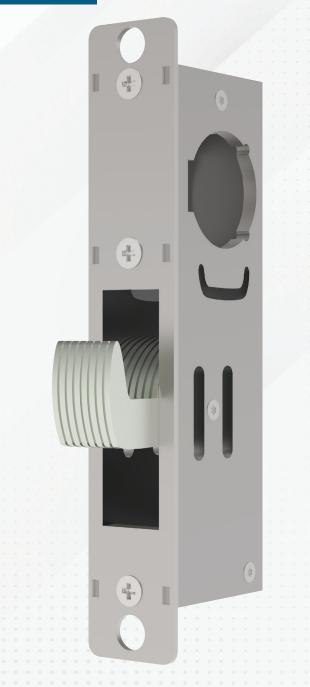

### **Description**

- Adams-Rite<sup>®</sup> series Hookbolt with five ply laminated steel hookbolt; non-handed.
- Standard backset is 1-1/8" (narrow stile door) or 1-1/2" (medium & wide stile doors).
- Assembly accepts any standard 1-5/32" diameter mortised cylinder, thumbturn cylinder, or dummy cylinder. All operating cylinder types require MS cam.
- Requires faceplate on single door.
- Considered maximum security for YKK AP . standard and upgrade locking devices.

#### **Compatible Entrances**

H-3201: (1-1/8" backset) 20D

H-3202: (1-1/2" backset) 35D/50D, 25T/35T/50T, 40M/50M. 35XT/50XT. 35H/50H

### **Material Composition**

Aluminum

## **Dimensions**

**Case:** 1" × 6" × backset depth Bolt: 5/8" x 1-3/8" with 13/16" throw Faceplate: 1" x 6-7/8"

### **Hardware Vendor**





#### Vendor Part or Series

Adams Rite MS-1853A-050

21-5028-00

# H-3201 / H-3202 Standard Hookbolt Lock Assembly