

ENVIRONMENTAL PRODUCT DECLARATION

ALUMINUM STOREFRONT SYSTEMS

YKK AP AMERICA, ENERGFACADE® ENERGY EFFICIENT BUILDING SOLUTIONS, PROTEK® HURRICANE MITIGATION AND BLAST MITIGATION SYSTEMS



Storefront framing systems are commonly used in ground floor and low-rise applications as shown here in Abercorn Commons in Savannah, GA.

All YKK AP products are manufactured, finished and inspected for quality in the YKK AP environmentally certified, state-of-the-art facility in Dublin, GA.



YKK AP America is taking positive steps toward sustainable manufacturing helping to balance ecology and economy—improving the environment and society over the longterm. YKK AP® is the proud manufacturer of architectural products, including aluminum sun control systems, which provide safe and comfortable environments for building occupants and help reduce energy usage.

A dedicated partner in green building design and sustainability, YKK AP helps create innovative, high quality architectural systems that add to the strength, energy efficiency and longevity of the building envelope.

All YKK AP® products are created in a facility that is a model of environmental responsibility. YKK AP's U.S. manufacturing plant in Dublin, GA, is ISO 14001 certified and has been recognized by the U.S. Department of Energy for exceptional leadership in industrial energy efficiency.

For additional information, visit commercial.ykkap.com.





ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL ENVIRONMENT 333 PFINGSTEN RD, NORTHBROOK, IL 60062	WWW.UL.COM WWW.SPOT.UL.COM
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	Program Operator Rules v 2.7 2022	
MANUFACTURER NAME AND ADDRESS	YKK AP Headquarters 101 Marietta Street NW, Suite 2700 Atlanta, GA 30303	
DECLARATION NUMBER	4789555932.103.1	
DECLARED PRODUCT & DECLARED UNIT	Aluminum Storefront System, 1 m²	
REFERENCE PCR AND VERSION NUMBER	Part A: Calculation Rules for the LCA and Requirements Project Report, (IBU/UL Environment (ULE, 2022); and, Part B: PCR for curtain walls (IBU, V1.7, 04.01.2019) (IBU, 2019)	
DESCRIPTION OF PRODUCT APPLICATION/USE	Self-supporting façade element / Used in construction / Storefront application	
MARKETS OF APPLICABILITY	North America	
DATE OF ISSUE	December 1, 2022	
PERIOD OF VALIDITY	5 years	
EPD TYPE	Company specific	
EPD SCOPE	Cradle to gate	
YEAR(S) OF REPORTED PRIMARY DATA	2019	
LCA SOFTWARE & VERSION NUMBER	GaBi v10 (Sphera, 2020)	
LCI DATABASE(S) & VERSION NUMBER	GaBi 2021 (CUP 2021.1)	
LCIA METHODOLOGY & VERSION NUMBER	IPCC AR5 (GWP), CML-IA v4.8, (GaBi, 2021), TRACI 2.1 (Bare, 2012)	
The sub-category PCR review was conducted by:	Institut Bauen und Umwelt (IBU)	
	PCR review panel	
	ibu-epd.com	
This declaration was independently verified in accordance with ISO 14025: 2006. The UL Environment "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report," in conformance with ISO 21930:2017, serves as the core PCR, with additional considerations from the USGBC/UL Environment Part A Enhancement (2017) <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL		
	Cooper McCollum, UL Environment	
This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:	Sphera	
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	James Mellentine, Thrive ESG	

LIMITATIONS

The environmental impact results of steel products in this document are based on a declared unit and therefore do not provide sufficient information to establish comparisons. The results shall not be used for comparisons without knowledge of how the physical properties of the steel product impact the precise function at the construction level. The environmental impact results shall be converted to a functional unit basis before any comparison is attempted. See the results section for additional EPD comparability guidelines.

Environmental declarations from different programs (ISO 14025) may not be comparable.



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Product Definition And General Information

Description of Organization

Aluminum storefront framing systems are commonly used in ground-floor and low-rise applications and used in other areas where performance meets design requirements. Storefront system performance is focused on protecting the building interior, its occupants and contents from the elements by forming a barrier against wind, moisture and temperature. Storefronts are frequently integrated with entrances.

YKK AP® offers a broad selection of installation and aesthetic options to satisfy your project needs. Storefront systems are available with a variety of glazing options. Whether you prefer screw spline or shear block installation, consider your design needs covered. Many of YKK AP's storefront systems are impact tested and utilize either our MegaTherm® or ThermaBond Plus® thermal barrier technology to improve performance and enhance occupant comfort.

All YKK AP® products are manufactured, finished and inspected for quality in YKK AP's environmentally certified, state-of-the-art facility in Dublin, GA. As a result, YKK AP products

fit together without a lot of jobsite re-work. YKK AP offers a complete suite of tools and engineering services to assist in proper system selection, specification, and installation

Materials & Coatings

Aluminum Alloys:
6063 T5, 6063 T6,
6061 T6

Available Finishes:
ANODIZED PLUS®,
AAMA 2604/2605,
Painted Finishes

Product Description

The following YKK AP America aluminum storefront systems are covered by this EPD (glazing is excluded from this study):



YES 20 1" x 2" Commercial Storefront System

YES 20 is a complete sash system intended to provide a framing system for single lites of glass.



YES 40 FS 1-3/4" x 4" Commercial Storefront System

YES 40 FS is a center set, flush glazed storefront framing system designed primarily for 1/4" glass or infill panels 1/4" to 3/8" thick.



YES 40 FI 2" x 4" Commercial Storefront System

YES 40 FI is a center set; flush glazed framing system developed for 1" insulating glass and other types of infill panels of varying thicknesses.



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017




YES 45 FI 2" x 4" Commercial Storefront System

YES 45 FI is a center set; flush glazed framing system developed for 1" insulating glass and other types of infill panels of varying thicknesses.




YES 45 FS 1-3/4" x 4-1/2" Commercial Storefront System

YES 45 FS is a center set, flush glazed framing system designed primarily for 1/4" glass or infill panels 1/4" to 3/8" thick.



YES 45 XT 2" x 4-1/2" enerGfacade® High Performance Storefront System Featuring Dual Thermal Barriers

This energy saving storefront system features a dual thermal barrier design to significantly reduce heat transfer and keep internal surfaces warmer.



YES 45 FT 2-1/2" x 4-1/2" Thermally Broken Commercial Storefront System

YES 45 FT is a thermally broken, center set; flush glazed storefront system for monolithic and insulating glass.



YES 45 TU Center Set 2" x 4-1/2" Thermally Broken Commercial Storefront System

YES 45 TU is a thermally broken, center set; flush glazed storefront system for insulating glass.

Outside or inside glaze.



YES 45 TU Front Set 2" x 4-1/2" Thermally Broken Commercial Storefront System

YES 45 TU is a thermally broken, front set; flush glazed storefront system for insulating glass.

Outside or inside glaze.



YES 600 1-3/4" x 4-1/2" or 6" enerGfacade® Thermally Broken Front Loading Commercial Storefront System

YES 600 is a thermally broken front-loaded storefront system for 1" insulated glass.




ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017



YHS 50 FS 2-1/2" x 5" ProTek® Impact Resistant and Blast Mitigation Storefront System for Monolithic Glass

YHS 50 FS is a high performance monolithic storefront system designed and tested to meet the most demanding conditions.




YHS 50 FI 2-1/2" x 5" ProTek® Impact Resistant and Blast Mitigation Storefront System for Insulating Glass

YHS 50 FI is a high performance storefront system designed for insulating glass 1" to 1-5/16" thick and tested to meet the most demanding conditions.




YHS 50 TU 2-1/2" x 5" ProTek® Thermally Broken, Impact Resistant and Blast Mitigating Storefront System for Insulating Glass

YHS 50 TU is a high performance storefront system designed for insulating glass 1" to 1-5/16" thick and tested to meet the most demanding conditions.




YES 60 XT 2" x 6" enerGfacade® Thermally Broken Commercial Storefront

YES 60 XT is a thermally broken front-loaded storefront system for 1" insulated glass.



YES 60 FI 2" x 6 Non-Thermal Commercial Storefront

YES 60 FI is a non-thermal front-loaded storefront system for 1" insulated glass.



YES 60 TU 2" x 6 Thermally Broken Commercial Storefront

YES 60 TU is a thermally broken front-loaded storefront system for 1" insulated glass.



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Product Average

This EPD covers a weighted average storefront system with surface finish. The results for final product are calculated for the Dublin, GA production site in GA.

Application

Aluminum storefront systems are used in buildings.

Industry Standards

- AAMA 1801, ASTM E1425, ASTM E90, ASTM E413, ASTM E1332, ASTM E2235, ASTM E283, ASTM E330, AAMA 507, AAMA 1503, NFRC 100, NFRC 102, NFRC 200, NFRC 500, ASTM E331
- ProTek® hurricane and blast mitigation products: TAS 201, TAS 202, TAS 203, ASTM E1886, ASTM E1996, ASTM F1642, UFC 4-010-01

YKK AP® does not test or rate the declared products for extraordinary effects, i.e., performance under unforeseeable influence of fire, water or mechanical destruction.

Declaration of methodological framework

A “cradle-to-gate with options” analysis using life cycle assessment (LCA) techniques was conducted for this EPD. The analysis was done according to the product category rule (PCR) for Curtain wall published by the German Institute Construction and Environment (IBU) and followed LCA principles, requirements and guidelines laid out in the ISO 14040/14044 standards.

Delivery Status

YKK AP® storefront systems vary in size depending on the site. Aluminum storefront framing systems are commonly used in ground-floor and low-rise applications and are frequently integrated with entrances.

Technical Properties of the product as delivered

Table 1: Technical specifications

Name	Notes*	Value	Unit
Thermal Transmittance (U-Factor) AAMA 1503.1, AAMA 507, and NFRC 100	1,2,3,4	0.29 to 0.46	Btu/hr • ft ² • °F
Solar Heat-Gain Coefficient (SHGC) NFRC 200	1,2,3,4	0.23 to 0.24	
Condensation Resistance Factor (CRFf) AAMA 1503.1	2,3,4	33 to 72	
Water Infiltration** ASTM E 331 and AAMA 501.1	2	10 to 15	psf
Air Infiltration** ASTM E283 at 6.24 psf		0.06	cfmft ²
Impact Resistance ASTM E1886/E1996, Testing Application Standard 201/202/203	2,3,4	A, D, E	

* (1) Calculated based on U (Center of Glass) = 0.20 and SHGC (COG) = 0.25 (2) Varies by product type (3) Dependent on glazing specified (4) Based on products tested

** Predominantly describes the framing



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Material Composition

Aluminum storefront systems are made primarily from Aluminum. Some other assembly components such as sealing compounds are also used. Glazing is excluded from this EPD.

Base and Ancillary Material

Base and Ancillary materials for the weighted average product are presented for Storefront product family.

Table 2: Base and Ancillary material

Material	Mass [kg]	Mass [%]
Aluminum extrusion profile	5.91E+00	85.5
Aluminum extrusion (mill finish)	3.45E-03	0.05
Polyoxymethylene part (POM)	4.86E-03	0.07
Polyvinylchloride part (PVC)	1.04E-01	1.50
PP/EPDM-part	4.86E-01	7.03
Silicone sealing compound	1.79E-01	2.59
Steel part	3.61E-02	0.52
ThermaBond insulation material	1.89E-01	2.73
SUM TOTAL PER DECLARED UNIT	6.91E+00	100%

Note: Glazing is excluded from this study.

Manufacturing

All YKK AP® products are manufactured, finished, and inspected for quality in our environmentally certified, state-of-the-art facility in Dublin, GA.

The manufacturing process comprises the steps shown below:




ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

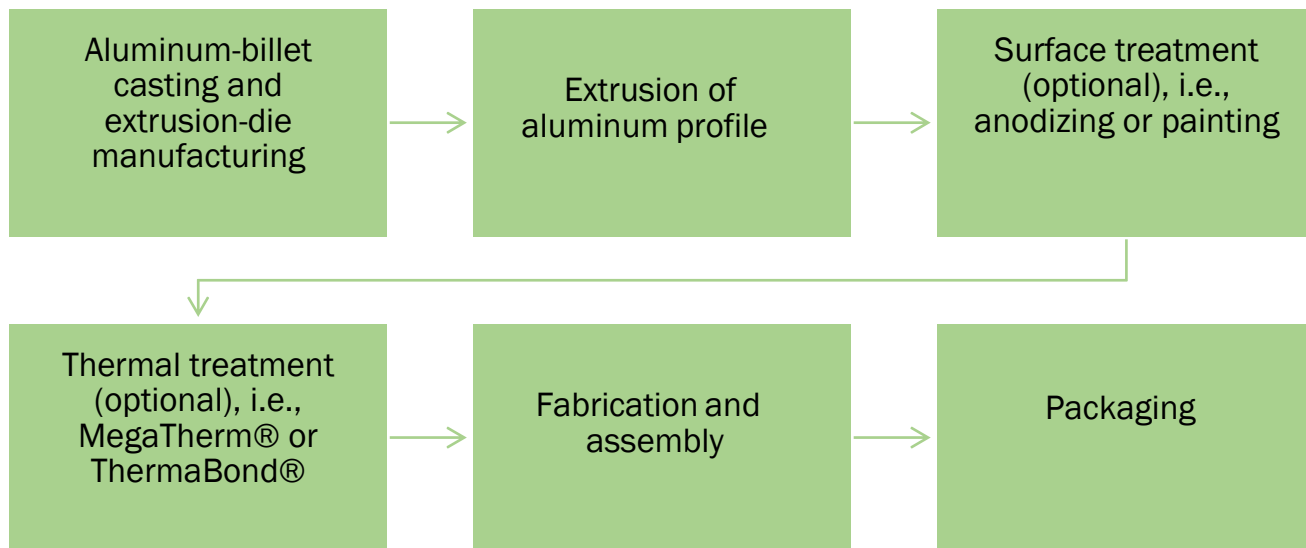

The main material input into the YKK AP® m manufacturing process is aluminum ingot. The ingot is first alloyed to the desired grade and cast into billets. Subsequently, the billets are extruded into profiles using steel dies that are manufactured on-site. The extruded profiles may then be anodized or painted. Optional thermal treatment, whereby a system is thermally broken, leads into the product's fabrication and assembly. In a last step, the complete assemblies are packed for shipment.

Packaging

Packaging data were not tracked, and was below the cut-off criteria, therefore, not included in the primary data provided by YKK. The life cycle impact of the overall product would likely be dominated by metals.

Transportation

Transportation to the customer or construction site is outside the scope of this EPD.

Product Processing/Installation

Outside of the scope of this EPD (installation stage excluded).

Use

Outside of the scope of this EPD.

Reference Service Life, Condition of Use

Outside of the scope of this EPD (use stage excluded).



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Recycling and Disposal

Aluminum extrusions are a highly efficient sustainable building material. Aluminum is 100% recyclable and can be recycled repeatedly. Recycled aluminum is identical to smelted aluminum but requires only 1/20 of the energy to manufacture. In building and construction aluminum scrap has a recycling rate of 95% [AA, 2013]. The remaining 5% are sent to landfill.

Table 3 Recycling and disposal

Name	Unit
Deconstruction	--
Transportation to the disposal site	100 km by truck
Waste processing	--
Disposal to landfill	5%
Recycling rate of the product	95%
Removals of biogenic carbon	N/A

Environment and Health

Product manufacturing: Plant emissions to air/soil/water are monitored (if applicable) and comply with local laws.

Product use: YKK AP® products are not expected to create exposure conditions that exceed safe thresholds for health impacts to humans or flora/fauna under normal operating conditions. Use stage is outside of the scope of this EPD.

Life Cycle Assessment Background Information

Declared Unit

The declared unit for an EPD is one square meter (1 m²) of storefront product.

Table 4 Declared unit

Name	Value	Unit
Declared unit	1	m ²
Conversion factor to 1 kg	6.91	kg/m ²

System Boundaries

Per the PCR, this “cradle-to-gate with options” analysis provides information on the Product Stage of the aluminum product life cycle, comprising modules A1–A3, and on the “options” Disposal and Credits, i.e., modules C4 and D. Module C1 and C3 are assumed to be zero. End-of-life transportation (C2) is assumed to be 100 km.



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025 and ISO 21930:2017

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)																
PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE			BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES	
Raw material supply	Transport	Manufacturing	Transport	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse- Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	X	MND	X	X

* X = module included, MND = module not declared

Time coverage: Primary data were collected on production within calendar year 2019. Background data for upstream and downstream processes (i.e., raw materials, energy resources, transportation, and ancillary materials) were obtained from GaBI CUP 2021.1 databases.

Technology coverage: Data were collected for the production of aluminum storefront system products at YKK AP's manufacturing facility in the United States.

Geographical coverage: All YKK AP® products are manufactured in Dublin, Georgia, USA. As such, the geographical coverage for this study is based on United States system boundaries for all processes and products. Whenever US background data were not readily available, European data or global data were used as proxies.

Estimates and Assumptions

This study was performed based on primary YKK AP data for the production of a production-weighted average storefront system. However, up to fabrication and assembly, where a bill of materials (BoM) specifies the parts which comprise an individual product, the underlying model was created to describe YKK AP® aluminum extrusions as generic intermediates. Thus, it was assumed that the same annual average split for surface treatments—i.e., 50% anodized, 18% painted, 32% remain mill finish—apply to extrusions going into storefront products as well as extrusions going into other products, e.g., windows (see separate EPD).

Another assumption was made in accounting for packaging materials, i.e., wood and corrugated cardboard. Due to a lack of data granularity, which is, at least partially, owed to the realities on the factory floor, packaging materials were scaled with the aluminum content as identified in the BoM.

Beyond that, no significant assumptions have been made. All of the raw materials and energy inputs were modeled using processes and flows that closely follow actual production raw materials and processes. All of the material and energy flows have been accounted.

Cut-off-Criteria

As required by EN 15804, in case of insufficient input data or data gaps for a unit process, the cut-off criteria were 1% of



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

renewable and non-renewable primary energy usage and 1% of the total mass input of that unit process. The total of neglected input flows per module was a maximum of 5% of energy usage and mass.

Product packaging information and end-of-life transportation are excluded from this study.

In practice, all inputs and outputs for which data were available have been included in the calculation. Data gaps have been filled by conservative assumptions with average or generic data. Capital items for the production processes (machines, buildings, etc.) were not taken into consideration. No known flows are deliberately excluded from this EPD.

Period Under Review

Primary data were collected for storefront product system during the years 2019 and 2020. Background data for aluminum were taken from Aluminum Association (AA) dataset and represents aluminum production during 2016 respectively. This analysis is intended to represent storefront manufacturing in 2019 (AA, 2022).

Data Sources

The LCA model was created using the GaBi 10 software system for life cycle engineering, developed by Sphera (Sphera, 2021). Background life cycle inventory data for raw materials and processes were obtained from the GaBi 2021 database (CUP 2021.1). Primary manufacturing data were provided by YKK.

In order to model the life cycle for the production and recycling of the extruded aluminum, the GaBi Professional software system developed by Sphera was used. All relevant background data necessary for the production of extruded aluminum were taken from the GaBi 2021 databases.

Industry average Aluminum Association (AA) dataset for primary Aluminum ingot is used to represent all primary Aluminum in this study.

Data Quality

A variety of tests and checks were performed by the LCA practitioner throughout the project to ensure high quality of the completed LCA. Checks included an extensive internal review of the project-specific LCA models developed as well as the background data used. A full data quality assessment is documented in the background report.

Allocation

No multi-output (i.e., co-product) allocation was performed in the foreground system of this study.

Primary data were collected in 2 separate stages. Primary data for different unit processes (casting, extrusion, anodizing, painting, thermal) were provided by YKK for the entire Dublin (GA) facility aggregated for all products. At this stage, inputs and outputs were allocated based on the reference mass flow of each product. In the second set of data, product BOM (bill of materials) were provided for each product including the sales volume for the year of data collection. We calculated the weighted average from each product family based on the sales volume to represent that specific product. No allocation was performed at this stage.

Allocation of background data (energy and materials) taken from the GaBi 2021 databases is documented online at <https://sphera.com/wp-content/uploads/2020/04/Modeling-Principles-GaBi-Databases-2021.pdf>. Also please refer to the 2022 LCA report on semi-fabricated aluminum. for more information: https://www.aluminum.org/sites/default/files/2022-01/2022_Semi-Fab_LCA_Report.pdf

Per the PCR guidance, recycling and recycled content in the cradle-to-gate system are modeled using the cut-off rule (a.k.a, the recycled content rule). All materials that are recycled from unit processes are considered to have left the system



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

boundary. Recycled content is modeled in the system only when the percent of recycled content was specified in the material purchase.

Interpreting the Results in Module D

The values in Module D include a recognition of the benefits or impacts related to aluminum recycling which occur at the end of the product's service life. The results included in Module D attempt to capture future benefits and impacts but are based on a methodology that uses current industry-average data reflecting current processes.

The net scrap approach is based on the perspective that material that is recycled into secondary material at end of life is able to substitute an equivalent amount of virgin material. Hence, a 'recycling credit' is given to account for this material substitution. A schematic of the Module D calculation is presented in Figure 1.

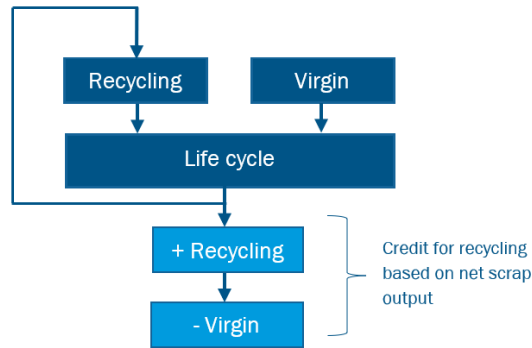


Figure 1: Schematic for the net-scrap approach (credit given at the end-of-life)



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Life Cycle Assessment Results

North American life cycle impact assessment (LCIA) results are declared using TRACI 2.1 (Bare, 2012; EPA, 2012) methodology, with the exception of GWP which is reported using the IPCC AR5 (IPCC, 2013) methodology, excluding biogenic carbon. CML -IA v4.8 results are presented as a requirement for the PCR part B. Primary energy use represents the lower heating value (LHV) a.k.a. net calorific value (NCV).

LCIA results are relative expressions and do not predict actual impacts, the exceeding of thresholds, safety margins or risks. The result for the weighted average product is given per the declared unit of 1 m² of curtain wall (storefront) system.

Table 5 Results for the weighted average of Storefront System per declared unit of 1m²

Impact Category	Unit	A1	A2	A3	C2	C4	D
LIFE CYCLE IMPACTS ASSESSMENT (LCIA) RESULTS							
<i>IPCC, AR5 (IPCC, 2013)</i>							
Global Warming Potential	kg CO ₂ eq.	7.28E+01	4.70E-01	1.21E+01	6.61E-02	5.69E-02	-4.34E+01
<i>CML-IA v4.8</i>							
Abiotic Depletion (ADP elements)	kg Sb eq.	5.92E-05	1.34E-07	1.22E-05	2.17E-08	2.46E-08	-1.61E-05
Abiotic Depletion (ADP fossil)	MJ	7.37E+02	6.09E+00	1.70E+02	9.67E-01	8.52E-01	-3.91E+02
Acidification Potential (AP)	kg SO ₂ eq.	3.37E-01	5.72E-03	1.77E-02	1.47E-04	2.23E-04	-2.19E-01
Eutrophication Potential (EP)	kg (PO ₄) ³⁻ eq.	2.12E-02	1.23E-03	2.34E-03	4.55E-05	2.99E-05	-1.31E-02
Ozone Layer Depletion Potential (ODP, steady state)	kg R11 eq.	2.15E-09	7.86E-17	4.32E-10	1.38E-17	1.90E-16	-1.46E-14
Photochem. Ozone Creation Potential (POCP)	kg C ₂ H ₄ eq.	1.76E-02	2.68E-04	1.02E-02	-5.11E-05	2.12E-06	-1.08E-02
<i>TRACI 2.1</i>							
Acidification Potential (AP)	kg SO ₂ eq.	3.16E-01	7.34E-03	1.85E-02	1.99E-04	2.42E-04	-2.03E-01
Eutrophication Potential (EP)	kg N eq.	7.66E-03	4.24E-04	1.91E-03	2.28E-05	1.35E-05	-4.51E-03
Ozone Depletion (ODP)	kg CFC 11 eq.	2.28E-09	7.86E-17	4.33E-10	1.38E-17	1.90E-16	-1.46E-14
Resources, Fossil fuels (FF)	MJ surplus energy	6.37E+01	8.13E-01	1.88E+01	1.29E-01	1.11E-01	-2.89E+01
Smog Formation Potential (SFP)	kg O ₃ eq.	2.74E+00	2.21E-01	4.62E-01	4.54E-03	4.30E-03	-1.67E+00
RESOURCE USE INDICATORS							
Renewable primary resources used as energy carrier (fuel) (RPRE)	MJ	4.34E+02	9.71E-02	2.68E+01	4.02E-02	7.23E-02	-2.82E+02



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Impact Category	Unit	A1	A2	A3	C2	C4	D
Renewable primary resources with energy content used as material (RPR _M)	MJ	--	--	--	--	--	--
Non-renewable primary resources used as an energy carrier (fuel) (NRPRE)	MJ	7.52E+02	6.13E+00	1.74E+02	9.75E-01	8.70E-01	-3.98E+02
Non-renewable primary resources with energy content used as material (NRPRM)	MJ	3.02E+00	0.00E+00	2.14E+01	0.00E+00	0.00E+00	0.00E+00
Renewable secondary fuels (RSF)	MJ	--	--	--	--	--	--
Non-renewable secondary fuels (NRSF)	MJ	--	--	--	--	--	--
Recovered energy (RE)	MJ	--	--	--	--	--	--
Secondary material (SM)	kg	3.78E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water resources (FW)	m ³	1.42E+00	3.63E-04	4.66E-02	1.72E-04	1.20E-04	-9.36E-01
OUTPUT FLOWS & WASTE FLOWS							
Hazardous waste disposed (HWD)	kg	5.31E-07	3.85E-10	1.66E-01	8.14E-11	8.22E-11	-2.41E-07
Non-hazardous waste disposed (NHWD)	kg	2.57E+01	3.42E-04	4.80E-01	8.96E-05	2.59E+00	-1.71E+01
High-level radioactive waste, conditioned, to final repository (HLRW)	kg	8.30E-06	1.94E-08	2.18E-06	3.28E-09	8.39E-09	-3.40E-06
Intermediate- and low-level radioactive waste, conditioned, to final repository (ILLRW)	kg	2.21E-04	5.32E-07	5.98E-05	9.03E-08	2.23E-07	-8.61E-05
Components for reuse (CRU)	kg	--	--	--	--	--	--
Materials for Recycling (MFR)	kg	0.00E+00	0.00E+00	1.50E+00	0.00E+00	0.00E+00	5.62E+00
Materials for Energy Recovery (MER)	kg	--	--	--	--	--	--
Exported Electrical Energy (EEE)	kg	--	--	--	--	--	--
Exported Thermal Energy (EET)	kg	--	--	--	--	--	--

Comparability: Comparisons cannot be made between product-specific or industry average EPDs at the design stage of a project before a



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025 and ISO 21930:2017

building has been specified. Comparisons may be made between product-specific or industry average EPDs at the time of product purchase when product performance and specifications have been established and serve as a functional unit for comparison. Environmental impact results shall be converted to a functional unit basis before any comparison is attempted.

Any comparison of EPDs shall be subject to the requirements of ISO 21930. EPDs are not comparative assertions and are either not comparable or have limited comparability when they have different system boundaries, are based on different product category rules or are missing relevant environmental impacts. Such comparison can be inaccurate and could lead to erroneous selection of materials or products which are higher impact, at least in some impact categories.

When comparing EPDs created using this PCR, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to different results for upstream or downstream of the life cycle stages declared.

Additional Results: Results from the other products in the curtain wall family are presented in the Annex. The results are described separately since their coefficients of variation between results are beyond $\pm 20\%$

Visualization of Life Cycle Impact Assessment

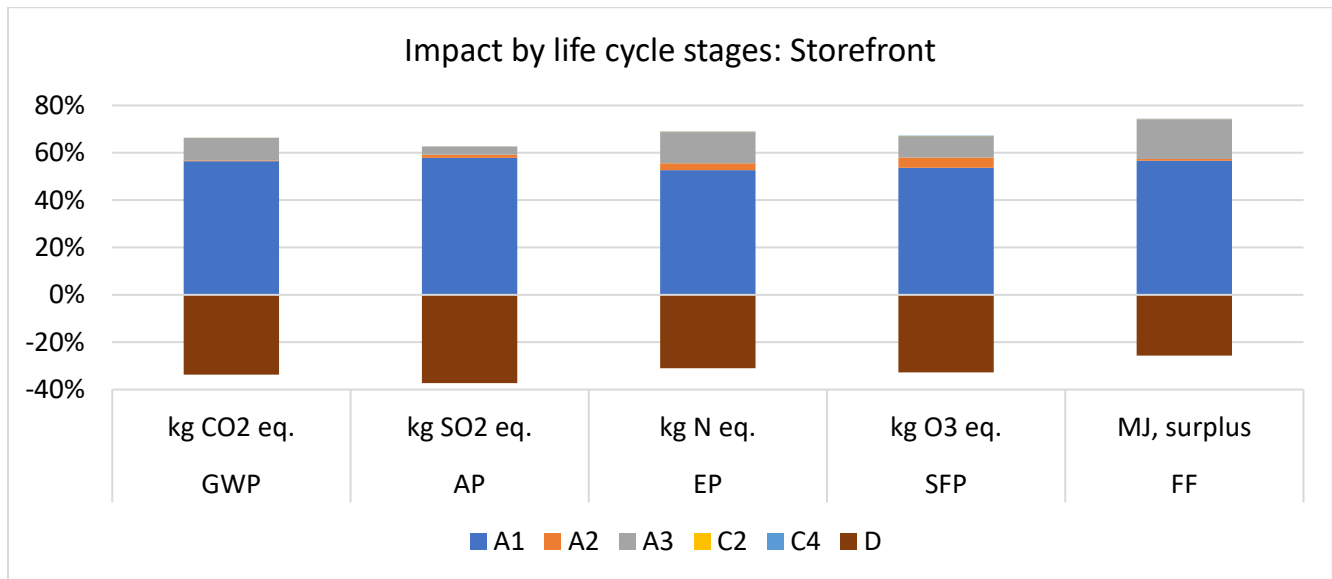


Figure 2: Storefront impact categories per module

Interpretation

The results represent the cradle-to-gate and disposal environmental performance of the valued entrance systems. As shown in the figure to the right, the results indicate that the impacts are driven by the product stage (modules A1- A3). The primary impact is derived from upstream aluminum production in module A1 (raw material supply). The YKK AP manufacturing processes account for a relatively small part of the manufacturing impact in comparison.

As module D (material credit at the end of life) clearly impacts the results, it is important to note that the applied recycling rate of 95% represents a defensible rate for aluminum extrusion products in the building and transportation sector. This is



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

based on a conservative calculation for global aluminum recycling from these sectors. If a higher rate is used, the credit will increase, thus lowering the net life-cycle impacts. Similarly, a lower recycling rate would raise the total net cycle impacts. As new information becomes available (e.g., the Aluminum Association publishes regional-specific recycling rates), this EPD should be modified to reflect the most current industry conditions.

Additional Environmental Information

Environment and Health During Manufacturing

Environmental, occupational health and safety practices are in accordance with OSHA and individual state requirements. The process and the products do not contain any materials or substances for which there exists a route to exposure that leads to humans or flora/fauna in the environment being exposed to said materials or substances at levels exceeding safe health thresholds.

Further Information

Further information can be found at <https://www.ykkap.com/residential/company/ykk-ap-america-inc/>

References

- AA. (2022, August). The Aluminum Association. Retrieved from <https://www.aluminum.org/>
- Bare, J. (2012). Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) - Software Name and Version Number: TRACI version 2.1 - User's Manual. Washington, D.C.: U.S. EPA.
- CML. (2016, September 05). CML-IA Characterisation Factors. Retrieved from Universiteit Leiden: <https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisation-factors>
- EAA. (2021). <https://www.european-aluminium.eu/>. Retrieved from European Aluminum Website.
- EPA. (2021). Retrieved from <https://www.epa.gov/environmental-topics/chemicals-and-toxics-topics>
- GaBi. (2021). Retrieved from <https://gabi.sphera.com/support/gabi/gabi-lcia-documentation/cml-2001/>
- IBU. (2019). Part B: Requirements on the EPD for Requirements on the EPD for Windows and doors (IBU V1.7, 04.01.2019).
- IBU. (2019). Part B: Requirements on the EPD for Self supporting façade elements based on glazed curtain walls (IBU, V1.7, 04.01.2019) .
- IBU/UL. (2014). PCR Guidance-Texts for Building-Related Products and Services: Part B: Requirements on the EPD for Products of aluminium and aluminium alloys. Berlin. IBU/UL.
- IBU/UL. (2018). Part A: Calculation Rules for the LCA and Requirements Project Report.
- IPCC. (2014). Climate Change 2013. The Physical Science Basis. Cambridge University Press. Retrieved from <http://www.ipcc.ch/report/ar5/wg1/>



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

- ISO, 2. (2017). Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services. Retrieved from <https://www.iso.org/standard/61694.html>
- Sphera. (2020). GaBi energy database, retrieved from Sphera Solutions Inc, <http://www.gabi-software.com/support/gabi/gabi-database-2019-lci-documentation/extension-database-ii-energy/>.
- Sphera. (2020). GaBi LCA Database Documentation. Retrieved from Sphera Solutions, Inc.: <http://www.gabi-software.com/america/support/gabi/>.
- Sphera. (2021). Retrieved from GaBi LCA Database Documentation: <http://www.gabi-software.com/america/support/gabi/>
- ULE. (2022). Part A: PCR Part A for Life Cycle Assessment Calculation Rules and Report Requirements. UL Environment.
- UNEP. (2011). Recycling Rates of Metals : A Status Report. Retrieved from UNE Document Repository: https://wedocs.unep.org/bitstream/handle/20.500.11822/8702/Recycling_Metals.pdf?sequence=1&isAllowed=y

Contact Information

Study Commissioner



YKK AP Headquarters
101 Marietta Street NW, Suite 2700
Atlanta, GA 30303
<https://www.ykkap.com/commercial/contact/>

LCA Practitioner



Sphera Solutions, Inc.
130 E Randolph St, #2900
Chicago, IL 60601
<https://sphera.com/contact-us/>
www.sphera.com



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Appendix

Table 6 Results for Storefront YHS 50 FS per declared unit of 1m²

Storefront YHS 50 FS						
	A1	A2	A3	C2	C4	D
IPCC GWP [kg CO2 eq.]	8.02E+01	5.06E-01	1.34E+01	7.15E-02	5.46E-02	-4.73E+01
CML-IA v4.8						
ADPe [MJ]	8.62E-05	1.44E-07	1.35E-05	2.34E-08	2.36E-08	-1.76E-05
ADPf [MJ]	7.95E+02	6.53E+00	1.87E+02	1.05E+00	8.17E-01	-4.26E+02
AP [kg SO2 eq.]	3.75E-01	6.30E-03	1.95E-02	1.59E-04	2.14E-04	-2.39E-01
EP [kg Phosphate eq.]	2.34E-02	1.35E-03	2.58E-03	4.93E-05	2.87E-05	-1.43E-02
ODP [kg R11 eq.]	2.71E-11	8.40E-17	4.80E-10	1.49E-17	1.82E-16	-1.59E-14
POCP [kg Ethene eq.]	1.96E-02	3.20E-04	1.13E-02	-5.53E-05	2.04E-06	-1.18E-02
TRACI 2.1						
AP [kg SO2 eq.]	3.51E-01	8.07E-03	2.05E-02	2.16E-04	2.33E-04	-2.22E-01
EP [kg N eq.]	8.41E-03	4.63E-04	2.12E-03	2.47E-05	1.30E-05	-4.92E-03
ODP [kg CFC 11 eq.]	2.71E-11	8.40E-17	4.81E-10	1.49E-17	1.82E-16	-1.59E-14
FF [MJ surplus energy]	6.73E+01	8.72E-01	2.08E+01	1.40E-01	1.06E-01	-3.15E+01
SFP [kg O3 eq.]	3.04E+00	2.44E-01	5.11E-01	4.92E-03	4.13E-03	-1.82E+00
LCI Indicators						
RPRE [MJ]	4.88E+02	9.83E-02	2.96E+01	4.35E-02	6.94E-02	-3.08E+02
RPRM [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPRE [MJ]	8.16E+02	6.58E+00	1.74E+02	1.05E+00	8.35E-01	-4.33E+02
NRPRM [MJ]	0.00E+00	0.00E+00	1.84E+01	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	--	--	--	--	--	--
SM [kg]	4.20E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m3]	1.58E+00	3.63E-04	5.15E-02	1.86E-04	1.15E-04	-1.02E+00
Output and waste flows						
HWD [kg]	6.36E-07	4.08E-10	1.84E-01	8.82E-11	7.89E-11	-2.63E-07
NHWD [kg]	2.88E+01	3.58E-04	5.28E-01	9.70E-05	2.48E+00	-1.86E+01
HLRW [kg]	9.11E-06	2.08E-08	2.41E-06	3.55E-09	8.05E-09	-3.71E-06
ILRW [kg]	2.48E-04	5.70E-07	6.61E-05	9.78E-08	2.14E-07	-9.38E-05
CRU [kg]	--	--	--	--	--	--
MFR [kg]	0.00E+00	0.00E+00	1.55E+00	0.00E+00	0.00E+00	6.24E+00
MER [kg]	--	--	--	--	--	--
EEE [MJ]	--	--	--	--	--	--
EET [MJ]	--	--	--	--	--	--



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Table 7 Results for Storefront YES 45XT per declared unit of 1m²

	Storefront YES 45XT					
	A1	A2	A3	C2	C4	D
IPCC GWP [kg CO2 eq.]	6.59E+01	4.41E-01	1.08E+01	6.22E-02	6.81E-02	-3.98E+01
CML-IA v4.8						
ADPe [MJ]	3.35E-05	1.27E-07	1.07E-05	2.04E-08	2.94E-08	-1.48E-05
ADPf [MJ]	6.95E+02	5.76E+00	1.51E+02	9.10E-01	1.02E+00	-3.58E+02
AP [kg SO2 eq.]	2.98E-01	5.14E-03	1.58E-02	1.38E-04	2.67E-04	-2.01E-01
EP [kg Phosphate eq.]	1.90E-02	1.11E-03	2.08E-03	4.28E-05	3.58E-05	-1.20E-02
ODP [kg R11 eq.]	5.93E-09	7.49E-17	3.81E-10	1.29E-17	2.27E-16	-1.34E-14
POCP [kg Ethene eq.]	1.58E-02	1.99E-04	8.97E-03	-4.81E-05	2.54E-06	-9.93E-03
TRACI 2.1						
AP [kg SO2 eq.]	2.80E-01	6.60E-03	1.65E-02	1.87E-04	2.90E-04	-1.86E-01
EP [kg N eq.]	7.02E-03	3.86E-04	1.70E-03	2.15E-05	1.62E-05	-4.13E-03
ODP [kg CFC 11 eq.]	6.31E-09	7.49E-17	3.82E-10	1.29E-17	2.27E-16	-1.34E-14
FF [MJ surplus energy]	6.27E+01	7.69E-01	1.68E+01	1.21E-01	1.33E-01	-2.65E+01
SFP [kg O3 eq.]	2.44E+00	1.98E-01	4.10E-01	4.27E-03	5.15E-03	-1.53E+00
LCI Indicators						
RPRE [MJ]	3.77E+02	1.02E-01	2.40E+01	3.78E-02	8.66E-02	-2.59E+02
RPRM [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPRE [MJ]	7.03E+02	5.80E+00	1.30E+02	9.17E-01	1.04E+00	-3.64E+02
NRPRM [MJ]	8.39E+00	0.00E+00	2.59E+01	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	--	--	--	--	--	--
SM [kg]	3.33E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m3]	1.25E+00	3.91E-04	4.14E-02	1.61E-04	1.43E-04	-8.58E-01
Output and waste flows						
HWD [kg]	4.86E-07	3.73E-10	1.46E-01	7.66E-11	9.85E-11	-2.21E-07
NHWD [kg]	2.25E+01	3.38E-04	4.31E-01	8.43E-05	3.10E+00	-1.56E+01
HLRW [kg]	7.93E-06	1.84E-08	1.95E-06	3.09E-09	1.00E-08	-3.12E-06
ILRW [kg]	2.04E-04	5.06E-07	5.34E-05	8.49E-08	2.67E-07	-7.89E-05
CRU [kg]	--	--	--	--	--	--
MFR [kg]	0.00E+00	0.00E+00	1.53E+00	0.00E+00	0.00E+00	4.95E+00
MER [kg]	--	--	--	--	--	--
EEE [MJ]	--	--	--	--	--	--
EET [MJ]	--	--	--	--	--	--



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Table 8 Results for Storefront YES 600 per declared unit of 1m²

Storefront YES 600						
	A1	A2	A3	C2	C4	D
IPCC GWP [kg CO2 eq.]	5.86E+01	3.77E-01	1.00E+01	5.28E-02	3.78E-02	-3.54E+01
CML-IA v4.8						
ADPe [MJ]	2.36E-05	1.07E-07	1.01E-05	1.73E-08	1.63E-08	-1.31E-05
ADPf [MJ]	5.86E+02	4.87E+00	1.40E+02	7.73E-01	5.65E-01	-3.18E+02
AP [kg SO2 eq.]	2.76E-01	4.70E-03	1.46E-02	1.17E-04	1.48E-04	-1.78E-01
EP [kg Phosphate eq.]	1.70E-02	1.00E-03	1.93E-03	3.64E-05	1.99E-05	-1.07E-02
ODP [kg R11 eq.]	1.58E-12	6.26E-17	3.58E-10	1.10E-17	1.26E-16	-1.19E-14
POCP [kg Ethene eq.]	1.41E-02	2.39E-04	8.40E-03	-4.08E-05	1.41E-06	-8.83E-03
TRACI 2.1						
AP [kg SO2 eq.]	2.57E-01	6.02E-03	1.53E-02	1.59E-04	1.61E-04	-1.66E-01
EP [kg N eq.]	6.04E-03	3.45E-04	1.58E-03	1.82E-05	8.96E-06	-3.67E-03
ODP [kg CFC 11 eq.]	1.58E-12	6.26E-17	3.58E-10	1.10E-17	1.26E-16	-1.19E-14
FF [MJ surplus energy]	5.00E+01	6.50E-01	1.55E+01	1.03E-01	7.35E-02	-2.35E+01
SFP [kg O3 eq.]	2.20E+00	1.82E-01	3.81E-01	3.63E-03	2.86E-03	-1.36E+00
LCI Indicators						
	A1	A2	A3	C2	C4	D
RPRE [MJ]	3.52E+02	7.32E-02	2.21E+01	3.21E-02	4.80E-02	-2.30E+02
RPRM [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPRE [MJ]	5.98E+02	4.90E+00	1.22E+02	7.78E-01	5.77E-01	-3.24E+02
NRPRM [MJ]	0.00E+00	0.00E+00	2.19E+01	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	--	--	--	--	--	--
SM [kg]	3.13E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m3]	1.16E+00	2.70E-04	3.84E-02	1.37E-04	7.93E-05	-7.63E-01
Output and waste flows						
	A1	A2	A3	C2	C4	D
HWD [kg]	3.46E-07	3.04E-10	1.37E-01	6.51E-11	5.46E-11	-1.97E-07
NHWD [kg]	2.11E+01	2.67E-04	3.93E-01	7.16E-05	1.72E+00	-1.39E+01
HLRW [kg]	5.91E-06	1.55E-08	1.79E-06	2.62E-09	5.57E-09	-2.77E-06
ILRW [kg]	1.53E-04	4.25E-07	4.93E-05	7.21E-08	1.48E-07	-7.01E-05
CRU [kg]	--	--	--	--	--	--
MFR [kg]	0.00E+00	0.00E+00	1.15E+00	0.00E+00	0.00E+00	4.66E+00
MER [kg]	--	--	--	--	--	--
EEE [MJ]	--	--	--	--	--	--
EET [MJ]	--	--	--	--	--	--



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Table 9 Results for Storefront YES40 per declared unit of 1m²

	Storefront YES40					
	A1	A2	A3	C2	C4	D
IPCC GWP [kg CO2 eq.]	5.74E+01	3.69E-01	9.80E+00	5.21E-02	3.94E-02	-3.46E+01
CML-IA v4.8						
ADPe [MJ]	2.31E-05	1.05E-07	9.85E-06	1.71E-08	1.70E-08	-1.28E-05
ADPf [MJ]	5.77E+02	4.77E+00	1.37E+02	7.63E-01	5.89E-01	-3.11E+02
AP [kg SO2 eq.]	2.70E-01	4.60E-03	1.43E-02	1.16E-04	1.54E-04	-1.74E-01
EP [kg Phosphate eq.]	1.67E-02	9.83E-04	1.89E-03	3.59E-05	2.07E-05	-1.04E-02
ODP [kg R11 eq.]	1.39E-12	6.13E-17	3.50E-10	1.08E-17	1.31E-16	-1.16E-14
POCP [kg Ethene eq.]	1.38E-02	2.34E-04	8.23E-03	-4.03E-05	1.47E-06	-8.63E-03
TRACI 2.1						
AP [kg SO2 eq.]	2.52E-01	5.89E-03	1.50E-02	1.57E-04	1.68E-04	-1.62E-01
EP [kg N eq.]	5.93E-03	3.38E-04	1.55E-03	1.80E-05	9.33E-06	-3.59E-03
ODP [kg CFC 11 eq.]	1.39E-12	6.13E-17	3.51E-10	1.08E-17	1.31E-16	-1.16E-14
FF [MJ surplus energy]	4.94E+01	6.37E-01	1.52E+01	1.02E-01	7.65E-02	-2.30E+01
SFP [kg O3 eq.]	2.15E+00	1.78E-01	3.73E-01	3.58E-03	2.98E-03	-1.33E+00
LCI Indicators						
RPRE [MJ]	3.45E+02	7.18E-02	2.16E+01	3.17E-02	5.00E-02	-2.25E+02
RPRM [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPRE [MJ]	5.89E+02	4.80E+00	1.17E+02	7.69E-01	6.02E-01	-3.17E+02
NRPRM [MJ]	0.00E+00	0.00E+00	2.34E+01	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	--	--	--	--	--	--
SM [kg]	3.06E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m3]	1.14E+00	2.65E-04	3.76E-02	1.35E-04	8.26E-05	-7.45E-01
Output and waste flows						
HWD [kg]	3.31E-07	2.98E-10	1.35E-01	6.42E-11	5.69E-11	-1.92E-07
NHWD [kg]	2.06E+01	2.61E-04	3.85E-01	7.07E-05	1.79E+00	-1.36E+01
HLRW [kg]	5.87E-06	1.52E-08	1.76E-06	2.59E-09	5.80E-09	-2.71E-06
ILRW [kg]	1.52E-04	4.16E-07	4.83E-05	7.12E-08	1.54E-07	-6.85E-05
CRU [kg]	--	--	--	--	--	--
MFR [kg]	0.00E+00	0.00E+00	1.13E+00	0.00E+00	0.00E+00	4.56E+00
MER [kg]	--	--	--	--	--	--
EEE [MJ]	--	--	--	--	--	--
EET [MJ]	--	--	--	--	--	--



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Table 10 Results for Storefront YHS50tU per declared unit of 1m²

	Storefront YHS50tU					
	A1	A2	A3	C2	C4	D
IPCC GWP [kg CO2 eq.]	9.29E+01	6.01E-01	1.55E+01	8.22E-02	6.32E-02	-5.55E+01
CML-IA v4.8						
ADPe [MJ]	9.39E-05	1.72E-07	1.55E-05	2.70E-08	2.73E-08	-2.06E-05
ADPf [MJ]	9.29E+02	7.80E+00	2.17E+02	1.20E+00	9.45E-01	-4.99E+02
AP [kg SO2 eq.]	4.32E-01	7.31E-03	2.26E-02	1.83E-04	2.48E-04	-2.80E-01
EP [kg Phosphate eq.]	2.71E-02	1.57E-03	2.98E-03	5.67E-05	3.32E-05	-1.68E-02
ODP [kg R11 eq.]	2.97E-09	1.01E-16	5.51E-10	1.71E-17	2.11E-16	-1.87E-14
POCP [kg Ethene eq.]	2.26E-02	3.40E-04	1.30E-02	-6.36E-05	2.36E-06	-1.39E-02
TRACI 2.1						
AP [kg SO2 eq.]	4.04E-01	9.37E-03	2.37E-02	2.48E-04	2.69E-04	-2.60E-01
EP [kg N eq.]	9.82E-03	5.42E-04	2.44E-03	2.84E-05	1.50E-05	-5.76E-03
ODP [kg CFC 11 eq.]	3.16E-09	1.01E-16	5.52E-10	1.71E-17	2.11E-16	-1.87E-14
FF [MJ surplus energy]	7.94E+01	1.04E+00	2.40E+01	1.61E-01	1.23E-01	-3.69E+01
SFP [kg O3 eq.]	3.51E+00	2.83E-01	5.90E-01	5.65E-03	4.78E-03	-2.13E+00
LCI Indicators						
RPRE [MJ]	5.58E+02	1.25E-01	3.43E+01	5.00E-02	8.02E-02	-3.60E+02
RPRM [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPRE [MJ]	9.49E+02	7.85E+00	2.06E+02	1.21E+00	9.66E-01	-5.08E+02
NRPRM [MJ]	4.21E+00	0.00E+00	1.71E+01	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	--	--	--	--	--	--
SM [kg]	4.82E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m3]	1.82E+00	4.68E-04	5.95E-02	2.14E-04	1.33E-04	-1.20E+00
Output and waste flows						
HWD [kg]	5.50E-07	4.93E-10	2.12E-01	1.01E-10	9.13E-11	-3.08E-07
NHWD [kg]	3.30E+01	4.38E-04	6.13E-01	1.11E-04	2.87E+00	-2.18E+01
HLRW [kg]	1.07E-05	2.48E-08	2.78E-06	4.09E-09	9.31E-09	-4.34E-06
ILRW [kg]	2.89E-04	6.82E-07	7.64E-05	1.12E-07	2.48E-07	-1.10E-04
CRU [kg]	--	--	--	--	--	--
MFR [kg]	0.00E+00	0.00E+00	1.93E+00	0.00E+00	0.00E+00	7.17E+00
MER [kg]	--	--	--	--	--	--
EEE [MJ]	--	--	--	--	--	--
EET [MJ]	--	--	--	--	--	--



ENVIRONMENTAL PRODUCT DECLARATION



YKK AP America

Aluminum Storefront System

According to ISO 14025
and ISO 21930:2017

Table 11 Results for Storefront YHS 50 FI per declared unit of 1m²

Storefront YHS 50 FI						
	A1	A2	A3	C2	C4	D
IPCC GWP [kg CO2 eq.]	8.64E+01	5.50E-01	1.46E+01	7.57E-02	5.02E-02	-5.14E+01
CML-IA v4.8						
ADPe [MJ]	8.77E-05	1.57E-07	1.47E-05	2.48E-08	2.17E-08	-1.91E-05
ADPf [MJ]	8.50E+02	7.10E+00	2.03E+02	1.11E+00	7.51E-01	-4.63E+02
AP [kg SO2 eq.]	4.07E-01	6.84E-03	2.12E-02	1.68E-04	1.97E-04	-2.60E-01
EP [kg Phosphate eq.]	2.53E-02	1.46E-03	2.81E-03	5.22E-05	2.64E-05	-1.55E-02
ODP [kg R11 eq.]	1.33E-12	9.13E-17	5.21E-10	1.58E-17	1.68E-16	-1.73E-14
POCP [kg Ethene eq.]	2.11E-02	3.48E-04	1.22E-02	-5.86E-05	1.87E-06	-1.28E-02
TRACI 2.1						
AP [kg SO2 eq.]	3.80E-01	8.77E-03	2.23E-02	2.28E-04	2.14E-04	-2.41E-01
EP [kg N eq.]	9.05E-03	5.03E-04	2.30E-03	2.62E-05	1.19E-05	-5.34E-03
ODP [kg CFC 11 eq.]	1.33E-12	9.13E-17	5.22E-10	1.58E-17	1.68E-16	-1.73E-14
FF [MJ surplus energy]	7.13E+01	9.48E-01	2.26E+01	1.48E-01	9.77E-02	-3.42E+01
SFP [kg O3 eq.]	3.28E+00	2.65E-01	5.55E-01	5.21E-03	3.80E-03	-1.98E+00
LCI Indicators						
	A1	A2	A3	C2	C4	D
RPRE [MJ]	5.28E+02	1.07E-01	3.22E+01	4.60E-02	6.38E-02	-3.34E+02
RPRM [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRPRE [MJ]	8.72E+02	7.15E+00	1.93E+02	1.12E+00	7.68E-01	-4.71E+02
NRPRM [MJ]	0.00E+00	0.00E+00	1.64E+01	0.00E+00	0.00E+00	0.00E+00
RSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF [MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE [MJ]	--	--	--	--	--	--
SM [kg]	4.56E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW [m3]	1.71E+00	3.94E-04	5.60E-02	1.97E-04	1.05E-04	-1.11E+00
Output and waste flows						
	A1	A2	A3	C2	C4	D
HWD [kg]	5.22E-07	4.43E-10	2.00E-01	9.34E-11	7.26E-11	-2.86E-07
NHWD [kg]	3.12E+01	3.89E-04	5.73E-01	1.03E-04	2.28E+00	-2.02E+01
HLRW [kg]	9.53E-06	2.26E-08	2.61E-06	3.76E-09	7.40E-09	-4.03E-06
ILRW [kg]	2.59E-04	6.19E-07	7.18E-05	1.04E-07	1.97E-07	-1.02E-04
CRU [kg]	--	--	--	--	--	--
MFR [kg]	0.00E+00	0.00E+00	1.68E+00	0.00E+00	0.00E+00	6.78E+00
MER [kg]	--	--	--	--	--	--
EEE [MJ]	--	--	--	--	--	--
EET [MJ]	--	--	--	--	--	--

