

HD

OPTIONS & PERFORMANCE



YKK AP stands behind every StyleView and Precedence HD Sliding Door with a limited lifetime warranty.

YKK AP AND ENERGY STAR

StyleView and Precedence doors meet ENERGY STAR performance guidelines when glazed with Low-E insulating glass—a standard feature of our products. In certain areas, argon gas is required to achieve ENERGY STAR performance levels. Contact your dealer for details.



AIR, STRUCTURAL, WATER PERFORMANCE


Configuration	Size	Air Infiltration @ 1.57 PSF	Water PSF	Structural PSF	Structural Class	Florida Certification Number
OX	96" x 96"	0.12	7.50	75.0	DP50	16605
XX	96" x 96"	0.02	7.50	75.0	DP50	16605
OXO	144" x 96"	0.07	6.89	75.0	DP45	16605
OXO*	144" x 96"	0.07	7.50	75.0	DP50	16605
OXO	192" x 96"	0.10	6.89	75.0	DP45	16605
OXO*	192" x 96"	0.10	7.50	75.0	DP50	16605

*with sill dam extender

THERMAL PERFORMANCE

	LoE 270				LoE 366			
	Grids	U-Factor		SHGC	Grids	U-Factor		SHGC
		No Argon	Argon			No Argon	Argon	
HD Sliding Door	No			0.28	No			0.21
	Yes	0.36	0.33	0.24	Yes	0.35	0.32	0.18

SLIDE CHART: (outside looking in)

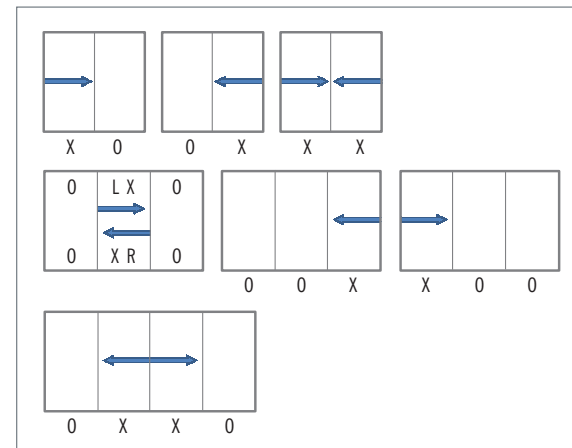


Field assembly required.

COLOR OPTIONS



Color swatches are representative only
* Compatible with YKK AP "Stone" color windows


GRID STYLE OPTIONS (face width: 7/8")

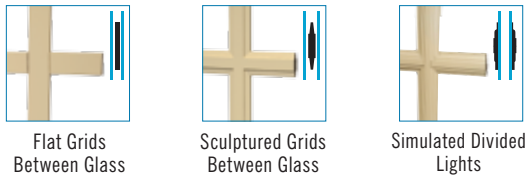


KEYED HANDLE SET OPTIONS



GLAZING OPTIONS

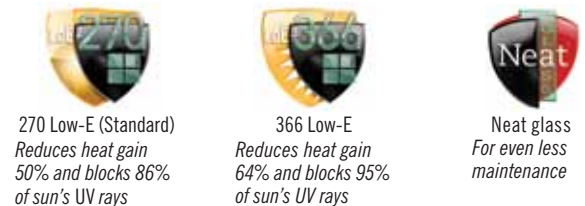

GRID PATTERN OPTIONS

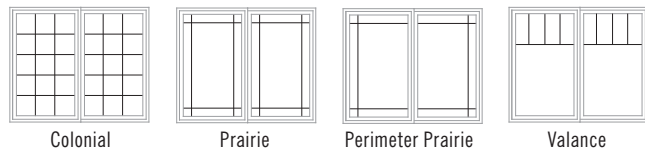

4234 Ocmulgee Blvd East
Macon, Georgia 31217

p: 866-348-9091 - f: 478-744-6221


www.ykkap.com

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. © 2018 YKK AP America Inc.

HDSD05/40118

HD SLIDING DOORS

New Construction and Replacement

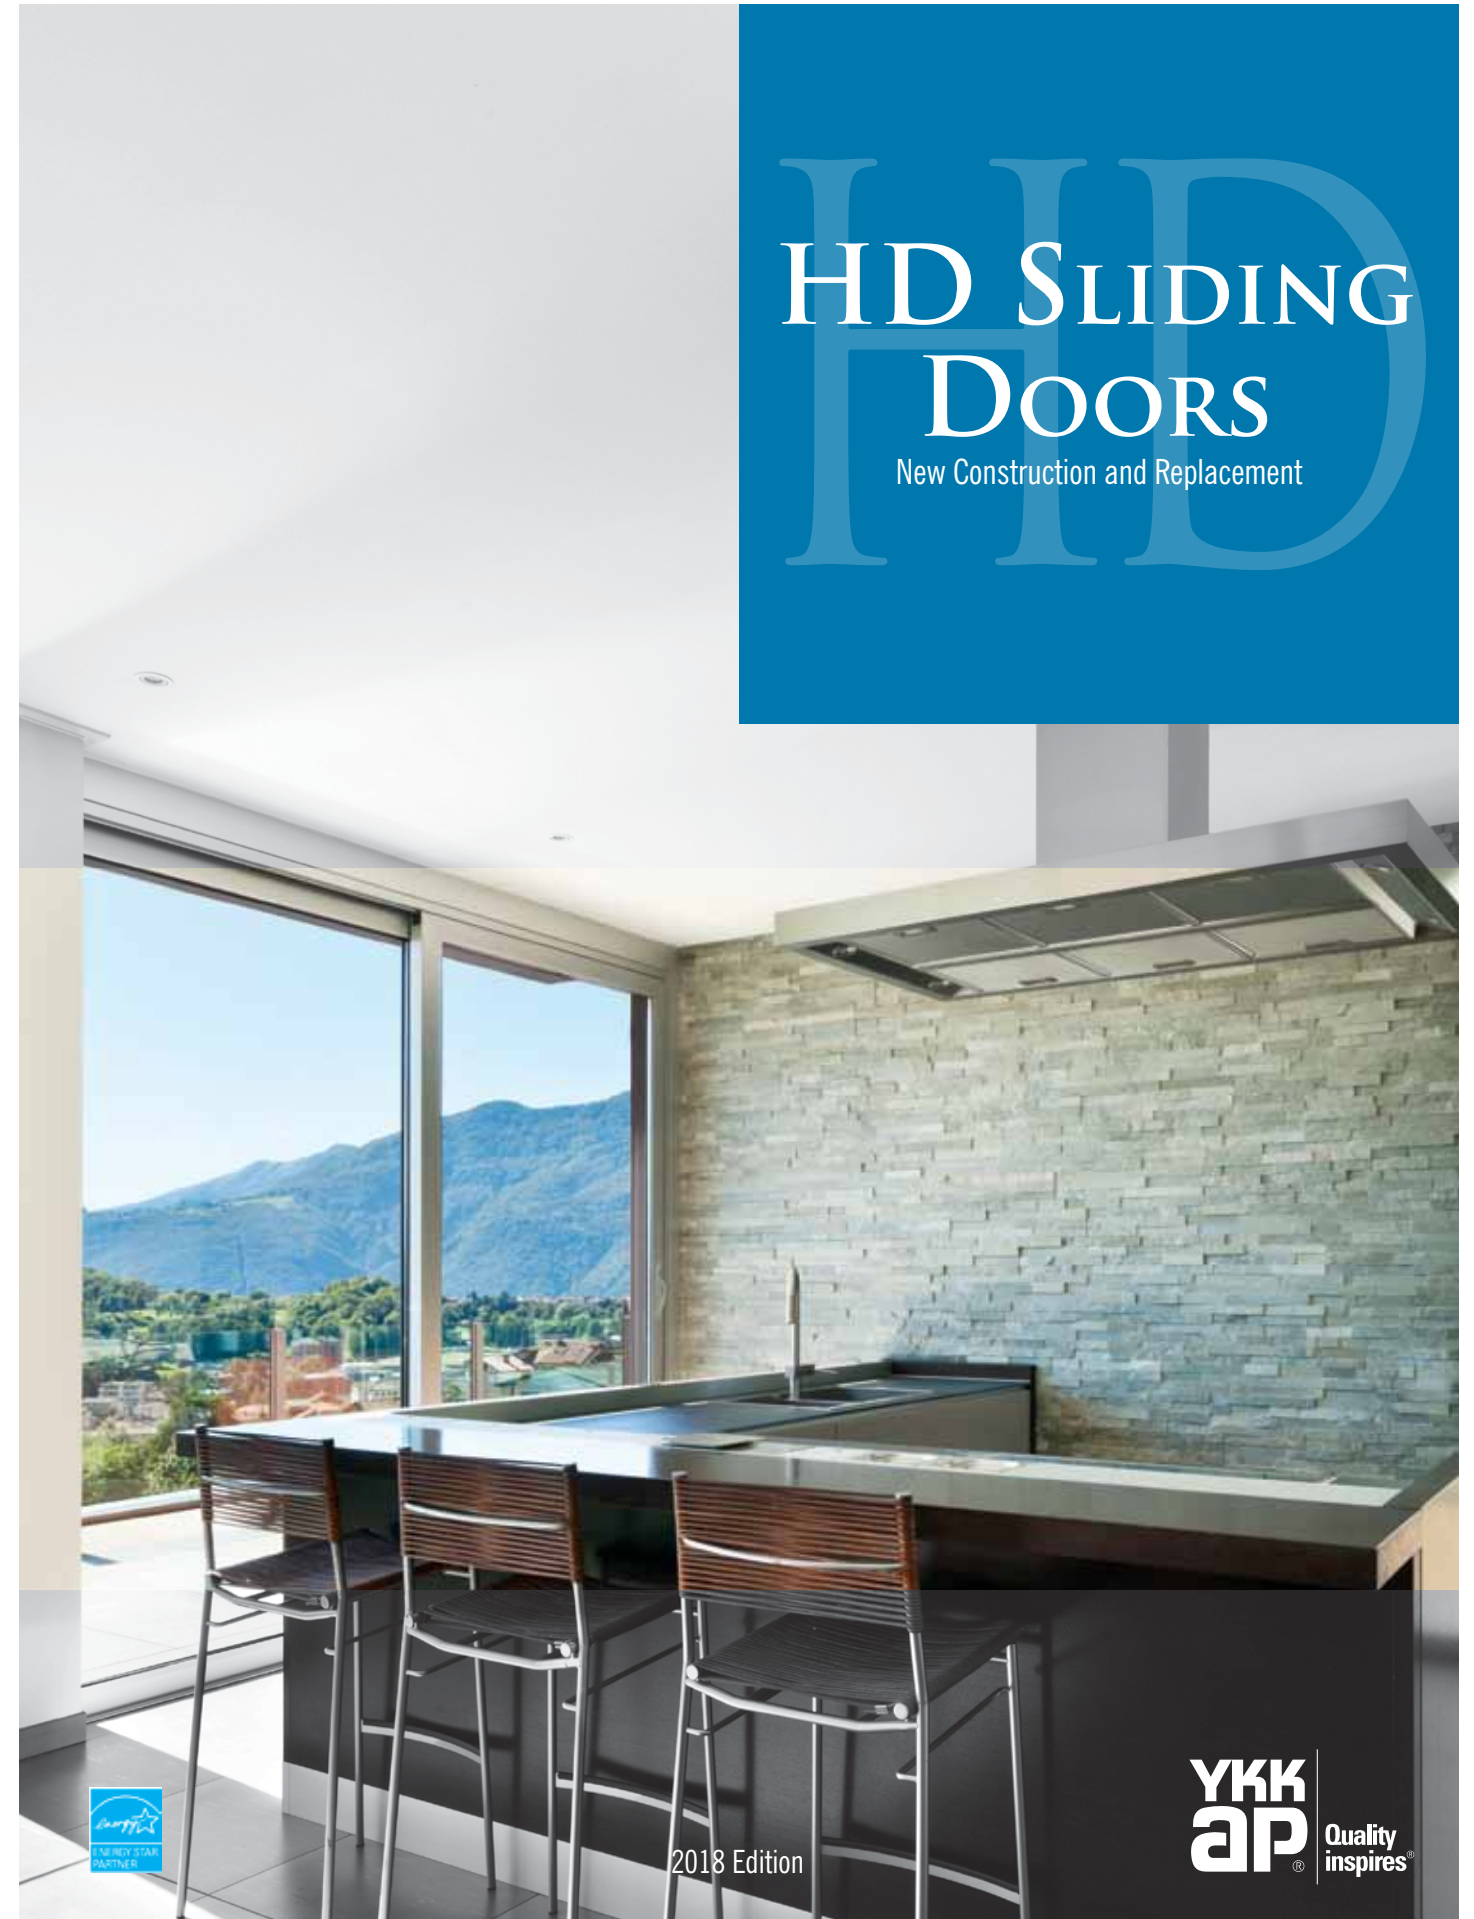

2018 Edition




HD SLIDING DOORS

StyleView® New Construction &
Precedence® Replacement

Builders recognize the total value StyleView HD new construction sliding doors represent, while homeowners appreciate Precedence HD replacement sliding doors for improved comfort, lower energy bills, and virtually maintenance-free performance:



- Distinctive feature/value price point
- Heavy-duty construction assures rigidity and stability
- Designed for easy installation
- Standard two, three, and four panel configurations to 16 feet wide and 8 feet high
- Custom sizes available
- Easy maintenance and exceptional durability
- Highly-rated air, structural, water performance
- ENERGY STAR compliant

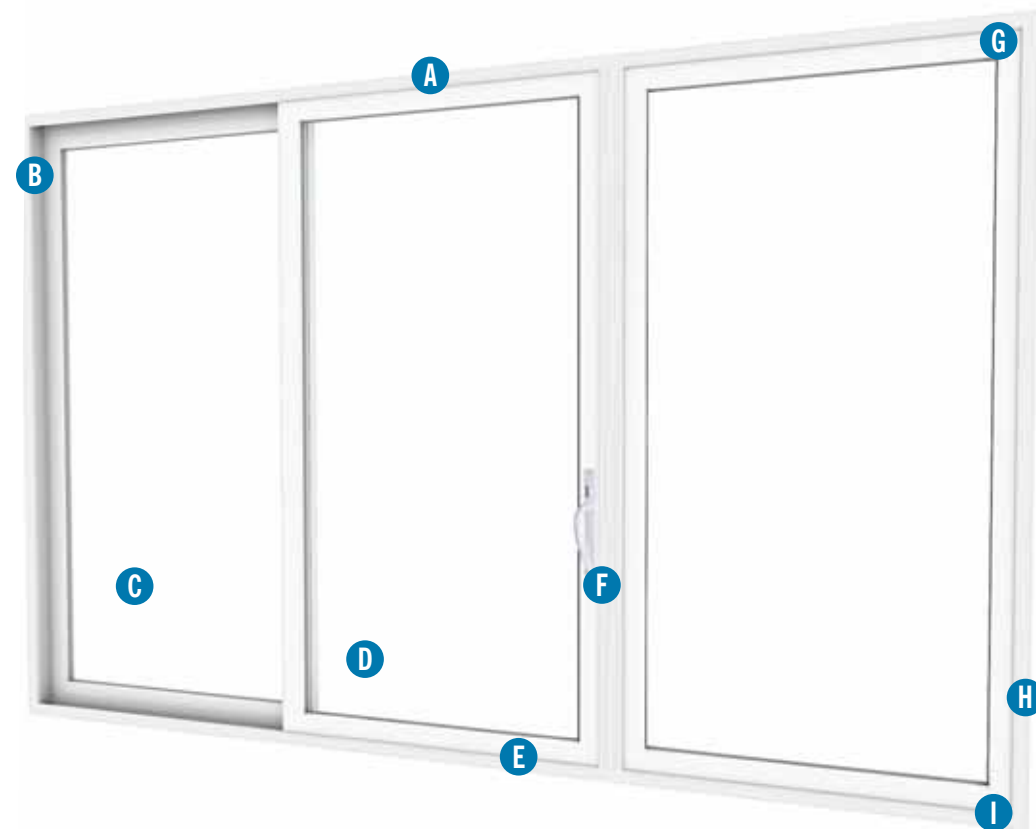

- A** Integral 1 1/4" Nail Fin
- B** Double Weather-Stripping
- C** 7/8" Insulated Glass
- D** Argon-Filled Glazing Option
- E** 1 1/2" Adjustable Rollers with Precision Bearings
- F** Premium Handle Set with 2-Point Lock and Optional Keyed Function
- G** Fusion-Welded Sash
- H** Brick Mould Option
- I** 1 1/2" Masonry Flange Option

Heavy-Duty Construction
with 4.5" Frame and 3.5"
Stiles and Rails

Heavy-Duty Extruded
Screen Door

Corrosion-Resistant
Hardware

Coastal Hardware
Package Available

To some, the “HD” designation for our HD commercially-rated vinyl residential sliding doors means Heavy Duty. ❖ For others, it means Highly Dependable. No matter, just know they’re designed for the High Demands of the extraordinary everyday family lifestyle. ❖ Each YKK AP HD sliding door is crafted to meet rigid standards for structural integrity, reliability, and performance established by the American Architectural Manufacturers Association. ❖ And, every YKK AP HD sliding door is loaded with standard and optional features

that make them easy to install and maintain, help keep families comfortable and energy bills low, and add a beautiful architectural feature wherever used.

- ❖ ENERGY STAR compliant
- ❖ Aluminum reinforced
- ❖ Thermally efficient glass options
- ❖ Stylish grid and color options
- ❖ Heavy duty extruded screen door
- ❖ Premium handle set with optional keyed lock

Configuration Options

Two Panel: xo, ox, xx (non-reversible)

1	60"	72"	96"
2	60"	72"	96"
3	59-1/2"	71-1/2"	95-1/2"
80"			
96"			

Sidelight: (cannot be mulled)

1	30"	36"	48"
2	32-1/4"	38-1/4"	50-1/4"
3	31-5/8"	37-5/8"	49-5/8"
80"			
96"			

Three Panel: oxo, oox, xoo (non-reversible)

1	90"	108"	144"
2	92-1/4"	110-1/4"	146-1/4"
3	91-13/16"	109-13/16"	145-13/16"
80"			
96"			

Transom: (cannot be mulled: sightlines do not align)

1	60"	72"	96"
2	60"	72"	96"
3	59-1/2"	71-1/2"	95-1/2"
12"			
16"			
18"			
24"			

Four Panel: oxox (non-reversible)

1	120"	144"	192"
2	119-1/4"	143-1/4"	191-1/4"
3	118-5/8"	142-5/8"	190-5/8"
80"			
96"			

- 1 Nominal
- 2 Rough Opening
- 3 Actual Size
- Sash operation is viewed from the outside looking in.
- All dimensions are inches.
- Doors are NOT reversible.
- Transoms and sidelights cannot be mulled.
- Field assembly required.