

STYLEVIEW® FLANGE WINDOWS

BUILT FOR THE DEMANDS OF MASONRY HOME BUILDING

YKK AP StyleView® brand vinyl windows are now available with a versatile flange option for masonry construction, such as typically found in Florida home building. Flanges are integral or factory applied to the face perimeter of each unit and, if damaged, can be easily replaced. StyleView

flange windows are perfect for both new and replacement projects, and available in single- and double-hung (single, twin, and triple), casement, transom, picture, awning and double slider configurations. For masonry construction in coastal areas, StyleGuard® impact-resistance windows are also available with the flange option.



A Integral or Applied 1/2" Flange:
Extruded or factory applied to face of unit, providing a finished return to each masonry opening

B Optional Sill Anchor:
For installation of twins and triples

C Double Weather Stripping:
Optimum protection against air, water, noise, and dust infiltration

D Removable Upper Sash:
Renders a real double-hung look while providing for simple economical repair and drywall pass-through

E Proprietary Cam Lock:
Provides tight weather seal, stainless steel components, and distinctive styling with concealed fasteners. Field-installed accessibility lock available on request.

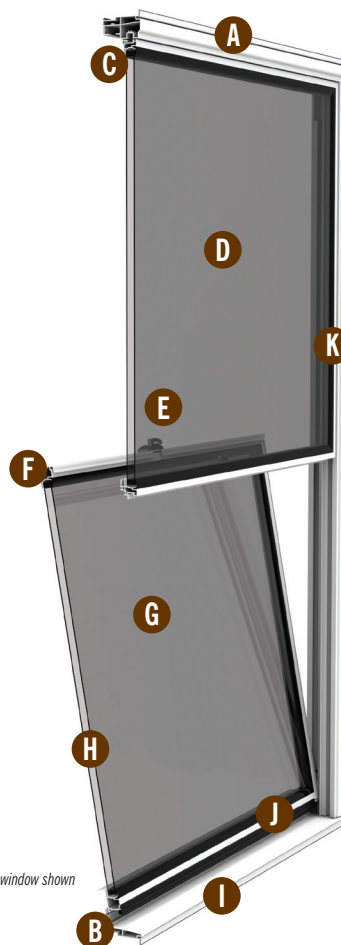

StyleView single-hung flange window shown



F Interlocking Sash:
Improves structural performance and adds security


G Tilt-In Bottom Sash:
Makes cleaning easier

H 3/4" Insulated Glass:
Low-E glass and low-conductance spacers are standard for optimal thermal efficiency


I Fusion-Welded Sloped Sill:
For an architecturally correct look and improved water rating

J Integral Lift Rail:
Enables easy sash operation


K Constant-Force Teflon®-Coated Stainless Steel Balance:
Corrosion-resistant and never needs adjustment




Single-Hung




Double-Hung



Casement




XX Slider
(Sliders available in StyleView only)



Picture



Transom



Awning





BUILT TO PERFORM

STYLEVIEW FLANGE HUNG WINDOW SIZES in inches

Window Type	Tip-to-Tip	19 1/8	26 1/2	37	53 1/8
Single-Hung & Double-Hung	26	19 1/8 x 26	(1-2)	26 1/2 x 26	(H3-2) 37 x 26 (2-2) 53 1/8 x 26 (3-2)
	38 3/8	19 1/8 x 38 3/8	(1-3)	26 1/2 x 38 3/8	(H3-3) 37 x 38 3/8 (2-3) 53 1/8 x 38 3/8 (3-3)
	50 5/8	19 1/8 x 50 5/8	(1-4)	26 1/2 x 50 5/8	(H3-4) 37 x 50 5/8 (2-4) 53 1/8 x 50 5/8 (3-4)
	56 1/4	19 1/8 x 56 1/4	(1-46)	26 1/2 x 56 1/4	(H3-46) 37 x 56 1/4 (2-46) 53 1/8 x 56 1/4 (3-46)
	63	19 1/8 x 63	(1-5)	26 1/2 x 63	(H3-5) 37 x 63 (2-5) 53 1/8 x 63 (3-5)
	66 1/4	19 1/8 x 66 1/4	(1-56)	26 1/2 x 66 1/4	(H3-56) 37 x 66 1/4 (2-56) 53 1/8 x 66 1/4 (3-56)
	72 1/4	19 1/8 x 72 1/4	(1-6)	26 1/2 x 72 1/4	(H3-6) 37 x 72 1/4 (2-6) 53 1/8 x 72 1/4 (3-6)
Twin Single-Hung & Twin Double-Hung	Tip-to-Tip	38 1/4	53	74	106 1/4
	26	38 1/4 x 26	(1-2)	53 x 26	(H3-2) 74 x 26 (2-2) 106 1/4 x 26 (3-2)
	38 3/8	38 1/4 x 38 3/8	(1-3)	53 x 38 3/8	(H3-3) 74 x 38 3/8 (2-3) 106 1/4 x 38 3/8 (3-3)
	50 5/8	38 1/4 x 50 5/8	(1-4)	53 x 50 5/8	(H3-4) 74 x 50 5/8 (2-4) 106 1/4 x 50 5/8 (3-4)
	56 1/4	38 1/4 x 56 1/4	(1-46)	53 x 56 1/4	(H3-46) 74 x 56 1/4 (2-46) 106 1/4 x 56 1/4 (3-46)
	63	38 1/4 x 63	(1-5)	53 x 63	(H3-5) 74 x 63 (2-5) 106 1/4 x 63 (3-5)
	66 1/4	38 1/4 x 66 1/4	(1-56)	53 x 66 1/4	(H3-56) 74 x 66 1/4 (2-56) 106 1/4 x 66 1/4 (3-56)
72 1/4	38 1/4 x 72 1/4	(1-6)	53 x 72 1/4	(H3-6) 74 x 72 1/4 (2-6) 106 1/4 x 72 1/4 (3-6)	
Triple Single-Hung & Triple Double-Hung	Tip-to-Tip	57 3/8	79 1/2	111	159 3/8
	26	57 3/8 x 26	(1-2)	79 1/2 x 26	(H3-2) 111 x 26 (2-2) 159 3/8 x 26 (3-2)
	38 3/8	57 3/8 x 38 3/8	(1-3)	79 1/2 x 38 3/8	(H3-3) 111 x 38 3/8 (2-3) 159 3/8 x 38 3/8 (3-3)
	50 5/8	57 3/8 x 50 5/8	(1-4)	79 1/2 x 50 5/8	(H3-4) 111 x 50 5/8 (2-4) 159 3/8 x 50 5/8 (3-4)
	56 1/4	57 3/8 x 56 1/4	(1-46)	79 1/2 x 56 1/4	(H3-46) 111 x 56 1/4 (2-46) 159 3/8 x 56 1/4 (3-46)
	63	57 3/8 x 63	(1-5)	79 1/2 x 63	(H3-5) 111 x 63 (2-5) 159 3/8 x 63 (3-5)
	66 1/4	57 3/8 x 66 1/4	(1-56)	79 1/2 x 66 1/4	(H3-56) 111 x 66 1/4 (2-56) 159 3/8 x 66 1/4 (3-56)
72 1/4	57 3/8 x 72 1/4	(1-6)	79 1/2 x 72 1/4	(H3-6) 111 x 72 1/4 (2-6) 159 3/8 x 72 1/4 (3-6)	

AIR, STRUCTURAL AND WATER PERFORMANCE

Window Type	Tip to Tip Max Size	Air Infiltration @ 1.57 PSF	Water PSF	Structural PSF	Structural Class	Florida Certification Number
Single-Hung	44 1/2 x 80 1/2	0.29	7.5	75.0	DP50	17169
	48 1/2 x 80 1/2	0.29	7.5	52.5	DP35	17169
	53 1/2 x 76	0.29	7.5	52.5	DP35	17169
Double-Hung	53 1/2 x 76	0.02	7.5	52.5	DP35	14591
	44 1/2 x 80 1/2	0.02	7.5	75	DP50	11382
Casement	40 1/2 x 80 1/2	0.01	7.5	75	DP50	15153
XX Slider	96 1/2 x 60 1/2	0.07	7.5	52.5	DP35	12286
Picture/Transom	72 1/2 x 96 1/2	0.00	7.5	75	DP50	11384

To determine thermal performance ratings, enter product specifications in





() = block call size
 StyleView: Deduct 1 inch from Tip-to-Tip width and height to determine frame size
 Twin/triple units joined with factory-installed mull. (These are NOT continuous head & sill.)

COMBINE STYLEVIEW FLANGE AND STYLEVIEW NT WINDOWS FOR NEARLY IDENTICAL APPEARANCE IN MASONRY/FRAME PROJECTS

StyleView Single-Hung with Flange

StyleView NT Single-Hung

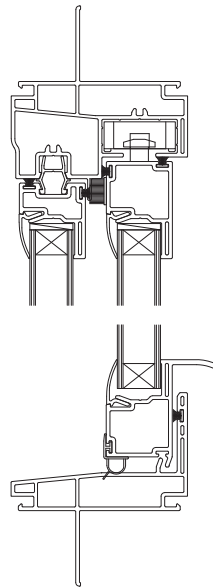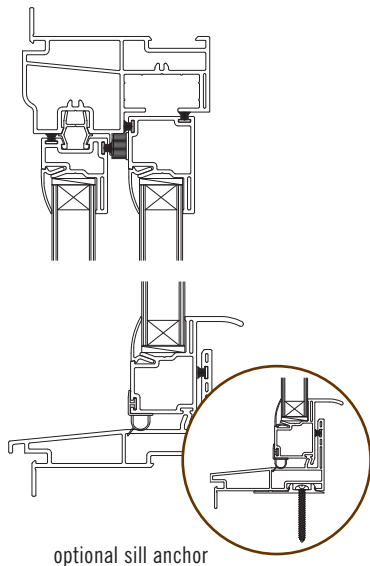

4234 Ocmulgee Blvd East
 Macon, Georgia 31217
 p: 866-348-9091
 f: 478-744-6221
www.ykkap.com/residential